



FERGUSON OKLAHOMA, OKC #230
3901 WEST RENO
OKLAHOMA CITY, OK 73107

Phone: 405-235-7354
Fax: 405-239-2027

Deliver To:

From: Shaine D'angelo

Comments:

18:06:38 NOV 28 2018

Page 1 of 3

FERGUSON ENTERPRISES INC #215

Price Quotation

Phone: 405-235-7354

Fax: 405-239-2027

Bld No: B316376
Bld Date: 11/26/18
Quoted By: SMD

Cust Phone: 405-550-7962
Terms: CASH ON DEMAND

Customer: KIM TODD
1724 DRAKESTONE
OKLAHOMA CITY, OK 73120

Ship To: KIM TODD

Cust PO#: AAG5847-9678074-3

Job Name: OUT OF TOWN HOME

Item	Description	Quantity	Net Price	UM	Total
** Kitchen **					
W5700SS	CCY LF 1.24 PD KITC FCT SS	1	1750.728	EA	1750.73
W1400HSS	CCY LF 1.24 SGL LEV HDL LAV FCT SS	1	536.214	EA	536.21
W5000	CCY 20T TANK ONLY	1	407.694	EA	407.69
EECTRUF30179R	CROSSTOWN LG 1B APN FRNT UC SINK SS	1	534.888	EA	534.89
ELK99	DLX DRN OUT	1	104.280	EA	104.28
IPRO1100XL	1.1 HP PRO 1100XL DISP	1	450.800	EA	450.80
** STEAM UNIT W/ OPTIONS *					
STEATSG15	TSG-15 TS STM GEN 15KW 240V 1PH	1	2812.500	EA	2812.50
STEAGPAD240	240V GEN PAN & AUTO DRN PKG	1	412.500	EA	412.50
STEATSSPIN	TS SPA PKG W/ INVISIBLE SPKR	1	2287.500	EA	2287.50
STEATSTRBN	TRIM RNG F/ CHROMA SENSE BN	1	67.500	EA	67.50
STEA550BN	DIGIT CNTL W/WIFI BN	1	975.000	EA	975.00
** Powder Bath **					
D65875LFGL	CCN LF 1.5 2HDL LEV W/SPRD LAV FCT	1	710.480	EA	710.48
DRP72412GL	GRID STRN W/O/FLOW LUGO	1	78.020	EA	78.02
K4326-0	@ CCY 1/1.6 EB *PERSUA *COMHEI	1	228.438	EA	228.44
K19042-0	CCY CLST TANK *PERSUA WHIT	1	158.508	EA	158.51
K4008-0	@ GRIP TIGHT Q3 EB CLST SEAT WHIT	1	55.786	EA	55.79
** Laundry **					
K5798-3-NA	25X22 TM UTIL SINK	1	634.406	EA	634.41
D9159ARDST	CCY LF 1.8 STAI 1HDL PD KITC FCT	1	442.806	EA	442.81
PF1433BRSS	SS TWIST-N-LOCK BSKT STRN W/BRN NUT	1	23.628	EA	23.63
MMED8200FC	*1118 CCY FL DRYR ELEC 7.4CF 10CYC	1	929.000	EA	929.00
MMHW8200FC	*1218 CCY FL WSHR MESL ELEC 4.5 CF1	1	949.000	EA	949.00
** Master Bath **					
DR70100	14.5 GPM FS TUB FILL ROUGH	1	295.480	EA	295.48
DT70135NKLHP	CCY 1.75 0HDL P/BAL FS TUB FILLER	1	1867.500	EA	1867.50
DHL7033NK	SGL HDL FS TUB FILL KIT T LEV	1	104.580	EA	104.58
D696335NK	TLT TANK LEV *LITZE LUNI	1	102.920	EA	102.92
D65335LFNKLHP	CCN LF 1.5 GPM W/SPRD LAV FCT LUNI	2	509.620	EA	1019.24
DHL5333NK	W/SPRD T-LEV HDL KIT LUNI	2	197.540	EA	395.08
K2215-0	21X14 VC UC LAV *LADENA WHIT	2	295.167	EA	590.33
K4144-0	CCY 1.28 12 EB SKTD *CORBEL WHIT	1	230.040	EA	230.04
K5711-0	CCY 1.28 TLT TANK *CORBEL WHIT	1	213.840	EA	213.84
K4008-0	@ GRIP TIGHT Q3 EB CLST SEAT WHIT	1	55.786	EA	55.79
DT75535NKLHP	L/HDL TSTC VLV W/ 3F DIV TRIM	1	521.240	EA	521.24
DR75000	1/2 3P 6F DIV RI VLV WM	1	149.600	EA	149.60
DHL7533NK	TSTC TEE HDL KIT *LITZE LUNI	1	217.460	EA	217.46

FERGUSON ENTERPRISES INC #215
Price Quotation

Fax: 405-239-2027

18:06:38 NOV 28 2018

Reference No: B316376

Item	Description	Quantity	Net Price	UM	Total
D87435NK	CCY 1.75 4F SHWRHD *LITZE LUNI	1	263.940	EA	263.94
D88735NK	CCY 1.75 3F H/SHWR KIT W/ SLDBR	1	673.960	EA	673.96
DRP81434NK	JOINTED SHWR ARM & FLG *LITZE LUNI	1	195.880	EA	195.88
D695035NK	HORZ SGL POST TP HLDR *LITZE LUNI	1	151.060	EA	151.06
D693537NK	DBL ROBE HOOK *LITZE LUNI	3	137.780	EA	413.34
D694735NK	8 MINI TWL BAR *LITZE LUNI	1	151.060	EA	151.06
D692435NK	24 TWL BAR *LITZE LUNI	1	202.520	EA	202.52
NS	BEVKRFOOTWH -BAINULTRA EVANESCENCE	1			
	** Jr. Master **				
DT75P598SLHLP	*CVR* CCY PRESSURE BALANCE VALVE WI	1	351.920	EA	351.92
DHX75P98SL	*CVR* BRIZO OTHER PBV W/ DIV CRS HD	1	205.840	EA	205.84
DR75000	1/2 3P 6F DIV RI VLV WM	1	149.600	EA	149.60
D88798SL	*CVR* CCY OKINETIC MULTI-FUNCTION S	1	577.680	EA	577.68
DRP92044SL	7.5 SHWR ARM & FLG *LEVOIR LUSL	1	104.580	EA	104.58
D87498SL	CCY 1.75 RND SHWRHD *LEVOIR LUSL	1	361.880	EA	361.88
D65398LFSLLHP	CCN LF 1.5 2H CRS W/SPRD LAV FCT	1	521.240	EA	521.24
DHX5398SL	W/SPRD CRS HDL KIT *LEVOIR LUSL	1	253.980	EA	253.98
D693597SL	*CVR* HINGED ROBE HOOK	1	180.940	EA	180.94
D695098SL	TISSUE HLDR *LEVOIR LUSL	1	149.400	EA	149.40
K2215-0	21X14 VC UC LAV *LADENA WHIT	1	295.167	EA	295.17
K4008-0	@ GRIP TIGHT Q3 EB CLST SEAT WHIT	1	55.786	EA	55.79
K4144-0	CCY 1.28 12 EB SKTD *CORBEL WHIT	1	230.040	EA	230.04
K5711-0	CCY 1.28 TLT TANK *CORBEL WHIT	1	213.840	EA	213.84
	** Apt Bath **				
DT75P598PCLHP	*CVR* CCY PRESSURE BALANCE VALVE WI	1	242.360	EA	242.36
DHX75P98PC	*CVR* BRIZO OTHER PBV W/ DIV CRS HD	1	141.100	EA	141.10
DR75000	1/2 3P 6F DIV RI VLV WM	1	149.600	EA	149.60
D88798PC	*CVR* CCY OKINETIC MULTI-FUNCTION S	1	398.400	EA	398.40
DRP92044PC	7.5 SHWR ARM & FLG *LEVOIR CP	1	71.380	EA	71.38
D87498PC	CCY 1.75 RND SHWRHD *LEVOIR CP	2	249.000	EA	498.00
D65398LFPCLHP	CCN LF 1.5 2H CRS W/SPRD LAV FCT	1	361.880	EA	361.88
DHX5398PC	W/SPRD CRS HDL KIT *LEVOIR CP	1	174.300	EA	174.30
D693597PC	*CVR* HINGED ROBE HOOK	1	124.500	EA	124.50
D695098PC	TISSUE HLDR *LEVOIR CP	1	102.920	EA	102.92
K2215-0	21X14 VC UC LAV *LADENA WHIT	1	295.167	EA	295.17
K4008-0	@ GRIP TIGHT Q3 EB CLST SEAT WHIT	1	55.786	EA	55.79
K4144-0	CCY 1.28 12 EB SKTD *CORBEL WHIT	1	230.040	EA	230.04
K5711-0	CCY 1.28 TLT TANK *CORBEL WHIT	1	213.840	EA	213.84
	** Appliances **				
SBI48SDSPH	CCY SS 48 SXS REFRIG 28.3CF W/ DISP	1	12615.000	EA	12615.00
ADBI664PHXXLS	CCY BI DW SS 24 W/ HIDDEN CNTL	1	1459.000	EA	1459.00
WMDD30PESPH	CCY BI MWAVE 30 SS 1.8 950W	1	2190.000	EA	2190.00
WPW542718	SS WALL HOOD 54X27X18	1	2669.000	EA	2669.00
W814423	CCY 1200 CFM INT BLWR / WALL	1	831.000	EA	831.00
WDF486G	48 DUAL FUEL RNG 6B GRID	1	13770.000	EA	13770.00
MMED8630HC	*CVR* 7.4 CF 14 CYC 7 O	1	1029.000	EA	1029.00
PRD100406L	6FT 4 WIRE DRYER CORD 30 AMP	1	13.954	EA	13.95
MMHW8630HC	5.0 CF 14 CYC 13 OPT 5 TEMP WSHR	1	1049.000	EA	1049.00
PF146814	3/4 X 3/4 48 SS WM HOSE	1	15.568	EA	15.57
	** DOOR HARDWARE **				
E453929MB	SGL CYL GRIP KE HDLST *BRIGHT MBPA	1	449.000	EA	449.00
E2201US10B	RECT FLUSH PULL ORBR	4	20.000	EA	80.00
SP-EC7104LRTWB	EMTEK PASSAGE W/REC ROSE LARIAT LEV	9	114.400	EA	1029.60
SP-EC7204LRTWB	EMTEK PRIVACY W/REC ROSE LARIAT LEV	5	114.400	EA	572.00
SP-E7054LRTWB	EMTEK DUMMY W/REC ROSE LARIAT LEVER	4	91.000	EA	364.00
SP-E8465TWB	EMTEK DEADBOLT REC TWB	8	46.800	EA	374.40
SP-E2253TWB	EMTEK FLOOR MNT DOOR STOP TWB	19	14.300	EA	271.70
	** ADDITIONAL ITEMS **				
TM1356	*CVR* ASPEN TWIG PULL 12 IN	1	118.105	EA	118.11
TM1375	12 C-C FLT SIDE PULL SBLL *ASPEN	1	115.570	EA	115.57

FERGUSON ENTERPRISES INC #215
Price Quotation

Fax: 405-239-2027

18:06:38 NOV 28 2018

Reference No: B316376

Item	Description	Quantity	Net Price	UM	Total
TM1366	6 FLT SIDED PULL *ASPEN LIBR	1	23.595	EA	23.60
SP-E91014TWB	EMTEK 4X4 SQUARE HINGE TWB	19	7.700	PR	146.30
E2423TWB	DR BELL BTN #3 ROSETTE TWBZ	1	25.000	EA	25.00

Net Total:	\$68286.53
Tax:	\$5889.70
Freight:	\$0.00
Total:	\$74176.23

Quoted prices are based upon receipt of the total quantity for immediate shipment (48 hours). SHIPMENTS BEYOND 48 HOURS SHALL BE AT THE PRICE IN EFFECT AT TIME OF SHIPMENT UNLESS NOTED OTHERWISE. QUOTES FOR PRODUCTS SHIPPED FOR RESALE ARE NOT FIRM UNLESS NOTED OTHERWISE.

CONTACT YOUR SALES REPRESENTATIVE IMMEDIATELY FOR ASSISTANCE WITH DBE/MBE/WBE/SMALL BUSINESS REQUIREMENTS.

Seller not responsible for delays, lack of product or increase of pricing due to causes beyond our control, and/or based upon Local, State and Federal laws governing type of products that can be sold or put into commerce. This Quote is offered contingent upon the Buyer's acceptance of Seller's terms and conditions, which are incorporated by reference and found either following this document, or on the web at http://wolseley.com/terms_conditionsSale.html.
Govt Buyers: All items are open market unless noted otherwise.

LEAD LAW WARNING: It is illegal to install products that are not "lead free" in accordance with US Federal or other applicable law in potable water systems anticipated for human consumption. Products with "NP" in the description are NOT lead free and can only be installed in non-potable applications. Buyer is solely responsible for product selection.

FERGUSON
Bath, Kitchen & Lighting Gallery



Showroom Selections

KIM TODD
OUT OF TOWN HOME - Specifications

Shaine D'Angelo
3901 W Reno Ave
Oklahoma City, OK 73107
(405) 409-3881
Shaine.dangelo@ferguson.com

Table of Contents

Table of Contents	2
Kitchen	4
Waterstone Pull-Out Spray Kitchen Faucet 5700-SS	4
Waterstone Water Dispenser 1400H-SS	5
Waterstone Water Dispenser 5000	6
Elkay Apron Front / Specialty Kitchen Sink EECTRUF30179R	7
Elkay Drain Strainer LK99	8
Powder Bath	9
Brizo Wall Mount Bathroom Sink Faucet 65875LF-GL	9
Brizo Lavatory Drain RP72412GL	10
Kohler Toilet Seat K-4008-0	11
Laundry	13
Kohler Laundry Sink 5798-3-NA	13
Delta Faucet Pull-Out Spray Kitchen Faucet 9159-AR-DST	15
PROFLO Drain Strainer PF1433BRSS	16
Maytag Electric Dryer MED8200FC	17
Maytag Front Load Washer MHW8200FC	19
Master Bath	21
Brizo Freestanding Tub Filler T70135-NKLHP/HL7033-NK/R70100	21
Brizo Toilet Tank Lever 696335-NK	22
Brizo 8" Widespread Bathroom Sink Faucet 65335LF-NKLHP/HL5333-NK	23
Kohler Undermount Bathroom Sink K-2215-0	24
Kohler Two Piece Toilet K5709-0	26
Kohler Toilet Seat K-4008-0	28
Brizo Thermostatic / Volume Control Trim T75535-NKLHP	30
Brizo Tub & Shower Rough In Valve R75000	31
Brizo Faucet Handle HL7533-NK	32
Brizo Shower Head 87435-NK	33
Brizo Slidebar Mount Hand Shower 88735-NK	34
Brizo Shower Arm RP81434NK	35
Brizo Paper Holder 695035-NK	36
Brizo Robe Hook 693537-NK	37
Brizo Towel Ring 694735-NK	38
Brizo Towel Bar 692435-NK	39
Jr. Master	40
Brizo Non-Thermostatic Valve Trim T75P598-SLLHP	40
Brizo Faucet Handle HX75P98-SL	41
Brizo Tub & Shower Rough In Valve R75000	42
Brizo Slidebar Mount Hand Shower 88798-SL	43
Brizo Shower Arm RP92044SL	44
Brizo Shower Head 87498-SL	45
Brizo 8" Widespread Bathroom Sink Faucet 65398LF-SLLHP/HX5398-SL	46
Brizo Robe Hook 693597-SL	47

Brizo Paper Holder 695098-SL	48
Kohler Undermount Bathroom Sink K-2215-0	49
Kohler Toilet Seat K-4008-0	51
Kohler Two Piece Toilet K5709-0	53
Apt Bath	55
Brizo Non-Thermostatic Valve Trim T75P598-PCLHP	55
Brizo Faucet Handle HX75P98-PC	56
Brizo Tub & Shower Rough In Valve R75000	57
Brizo Slidebar Mount Hand Shower 88798-PC	58
Brizo Shower Arm RP92044PC	59
Brizo Shower Head 87498-PC	60
Brizo 8" Widespread Bathroom Sink Faucet 65398LF-PCLHP/HX5398-PC	61
Brizo Robe Hook 693597-PC	62
Brizo Paper Holder 695098-PC	63
Kohler Undermount Bathroom Sink K-2215-0	64
Kohler Toilet Seat K-4008-0	66
Kohler Two Piece Toilet K5709-0	68
Appliances	70
Sub-Zero Upright Freezer BI-36FS/PH/LH	70
Sub-Zero Freezerless Refrigerator BI-36R/S/PH/RH	72
Asko Built-In Dishwasher DBI664PHXXLS	74
Wolf Built-In Microwave MDD30PE/S/PH	76
Wolf Wall Mount Range Hood WPW542718	78
Wolf Blower 814423	80
Wolf Dual Fuel Range DF486G	81
Maytag Electric Dryer MED8630HC	83
Prime Appliance Cords Power Cord RD100406L	84
Maytag Front Load Washer MHW8630HC	85
PROFLO Connector / Supply Line PF146814	86



MADE IN AMERICA
SINCE 1999

TRANSITIONAL EXTENDED REACH PLP PULLDOWN FAUCET SPECS

Model # 5700




PRODUCT DESCRIPTION

- Unique "PLP" positive lock holds spray head in place.
- Extended reach 11" spout.
- Spray head extends 18" from spout.
- Pre-positioned "Easy Pull" counterbalanced weight.
- Select lever spray or aerated stream.
- Spout swivels 360 degrees.
- Adjustable PTFE "Friction Lock" helps handle feel and prevents sag.
- Handle adjusts 22.5 degrees in either direction for backsplash clearance.
- Single handle mounts in front, right or left hand positions.
- Hot/Cold ceramic disk valve cartridge.
- Compatible with reverse osmosis filtration systems.
- 1.75 gpm maximum flow rate with aerated tip.
- Solid brass or stainless steel construction.
- Reversible or removable Hot/Cold indicator ring.
- Reinforced braided connection hoses.
- Lifetime Functional Warranty.
- Made in the USA.

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- NSF 61, 372
- CALGreen

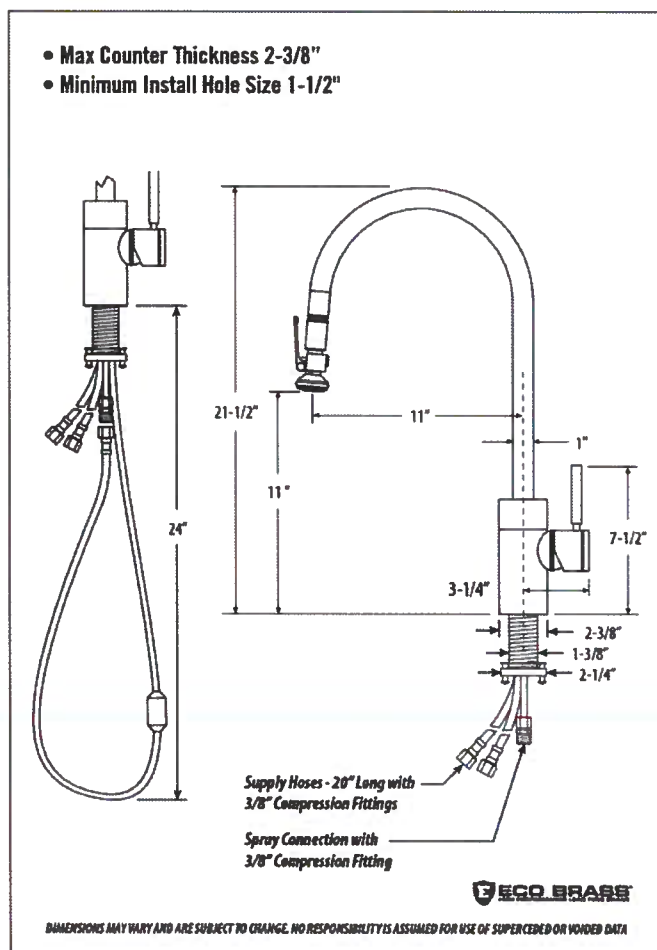

AVAILABLE IN 30 FINISHES + SOLID STAINLESS STEEL

Antique Brass - AB
Antique Bronze - ABZ
Antique Copper - AC
American Bronze - AHB
Antique Pewter - AP
Gloss Black - GB
Black Nickel - BLN
Black-Oil Rubbed Bronze - ORB
Caribbean Bronze - CB
Chocolate Bronze - CHB
Chrome - CH

Classic Bronze - CLZ
Distressed Antique Brass - DAB
Distressed Antique Copper - DAC
Distressed American Bronze - DAAB
Distressed Antique Pewter - DAP
Matte Black - MB
Polished Brass - PB
Polished Copper - PC
Polished Gold - PG
Polished Nickel - PN
Satin Brass - SB

Satin Chrome - SC
Satin Gold - SG
Satin Nickel - SN
Stainless Steel - SS*
Tuscan Brass - TB
Unlaquered Polished Brass - UPB
Venetian Bronze - VB
Weathered Brass - WB
Weathered Copper - WC

41180 Raintree Court • Murrieta, CA 92562 • 1-888-304-0660 • Fax 951-304-0525 • www.waterstoneco.com

*Contemporary Styles Only

REVISED: 2-22-18



MADE IN AMERICA
SINCE 1999

PARCHE HOT ONLY FILTRATION FAUCET

Model # 1400H



PRODUCT DESCRIPTION


- For use with Waterstone Insta-Hot System.
- Part of the Parche Contemporary Suite.
- Classic C-spout with 4" reach.
- Spout swivels 360 degrees.
- Compatible with reverse osmosis filtration systems.
- 1/4 turn ceramic disk valve cartridges.
- 1.1 gpm maximum flow rate.
- Solid brass or stainless steel construction.
- Single lever handle.
- Compatible with Reverse Osmosis filtration systems.
- Lifetime Functional Warranty.
- Made in America.

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- NSF 61, 372
- CALGreen
- ADA Compliant

- Max Counter Thickness 2-1/2"
- Install Hole Size Adaptable Up to 1-3/8"

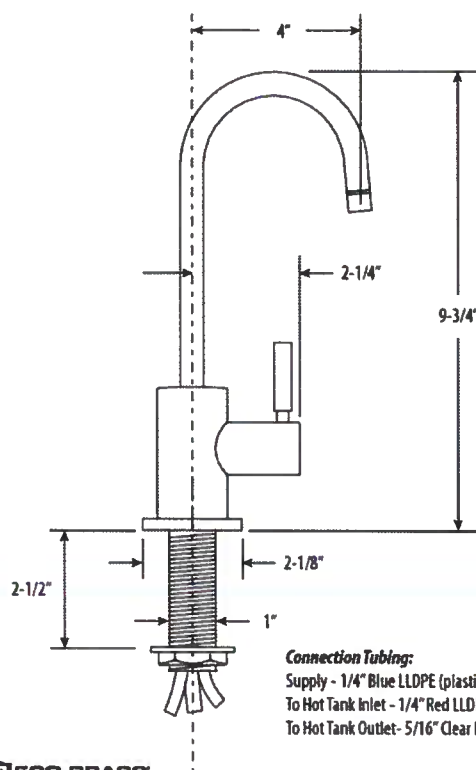

Connection Tubing:

- Supply - 1/4" Blue LLDPE (plastic) x 48"
- To Hot Tank Inlet - 1/4" Red LLDPE (plastic) x 36"
- To Hot Tank Outlet - 5/16" Clear FEP x 36"



DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA

AVAILABLE IN 29 FINISHES + SOLID STAINLESS STEEL

Antique Brass - AB
Antique Bronze - ABZ
Antique Copper - AC
American Bronze - AHB
Antique Pewter - AP
Gloss Black - GB
Black Nickel - BLN
Black-Oil Rubbed Bronze - ORB
Caribbean Bronze - CB
Chocolate Bronze - CHB

Chrome - CH
Distressed Antique Brass - DAB
Distressed Antique Copper - DAC
Distressed American Bronze - DAMB
Distressed Antique Pewter - DAP
Matte Black - MB
Polished Brass - PB
Polished Copper - PC
Polished Gold - PG
Polished Nickel - PN

Satin Chrome - SC
Satin Gold - SG
Satin Nickel - SN
Stainless Steel - SS*
Tuscan Brass - TB
Unlaquered Polished Brass - UPB
Venetian Bronze - VB
Weathered Brass - WB
Weathered Copper - WC

41180 Raintree Court • Murrieta, CA 92562 • 1-888-304-0660 • Fax 951-304-0525 • www.waterstoneeco.com

*Contemporary Styles Only

REVISED: 3-1-17

Product Details and Dimensions

Waterstone



Waterstone 5000 "Tank" Water Dispenser

Details and Dimensions

Tank Size	1/2 gal.
Hot Water Temperature	190
Cups Per Hour	60
CEC Approved	Yes
Additional Information	◆ Compatible with Reverse Osmosis Systems
Depth	8-1/4"
Height	11-1/4"
Width	6-3/4"

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

Elkay Apron Front / Specialty Kitchen Sink EECTRUF30179R

Crosstown™
Undermount Single Bowl Apron Sink
Model ECTRUF30179R

30" wide


2018 Ferguson Enterprises, Inc.

ELKAY. SPECIFICATIONS


Sink Accessories Drain Fitting Model LK99

GENERAL

- Type 304 stainless steel body and removable conical basket strainer with metal ball bearing locking stem and rubber stopper
- Fits 3-1/2" (89mm) opening
- Ultra bright polished finish
- Type 304 stainless steel 1-1/2" (38mm) x 4" (102mm) tailpiece

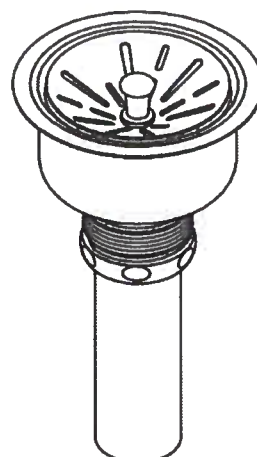

Model LK99

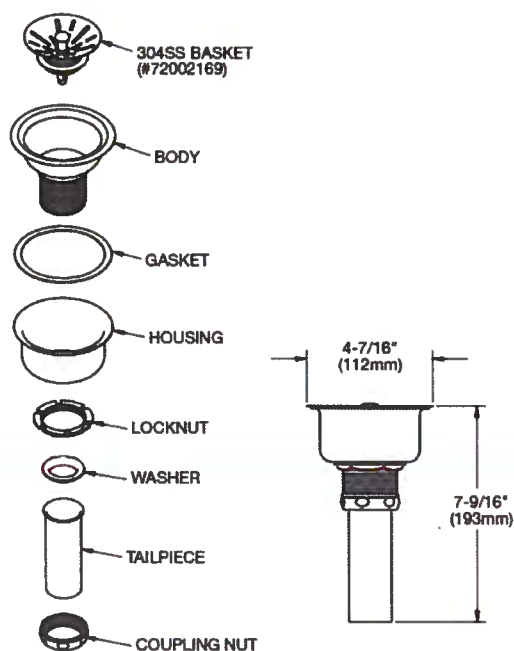

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


Elkay
elkayusa.com

2222 Camden Court
Oak Brook, IL 60523

Printed in U.S.A.
©2008 Elkay
(Rev. 10/08) 15-7D


Powder Bath

Brizo Wall Mount Bathroom Sink Faucet 65875LF-GL



Submitted Model No.: _____

Specific Features: _____

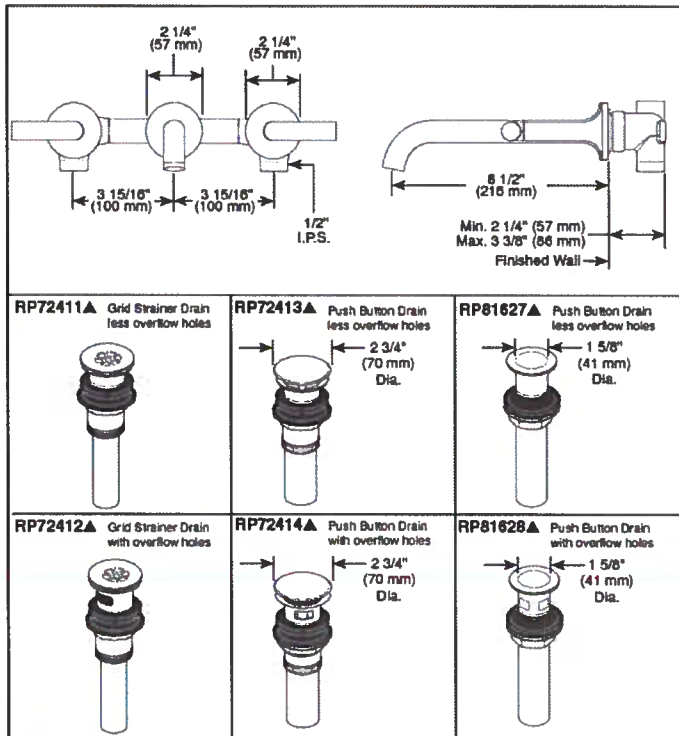

▲ Designate proper finish suffix

BRIZO[®] LAVATORY FAUCETS

- Odin™ Bath Collection
- Two Handle Wall-Mounted Lavatory

STANDARD SPECIFICATIONS:

- Max flow rate: 1.50 GPM @ 60 PSI, 5.68 L/Min @ 414 kPa
- Max flow rate (ECO models only): 1.20 GPM @ 60 PSI, 4.54 L/Min @ 414 kPa
- Three hole mount
- Ceramic cartridge
- Spout features hidden water-efficient laminar flow aerator
- Drain sold separately

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations


Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-65875LF Rev. F

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company


Powder Bath

Brizo Lavatory Drain RP72412GL



Submitted Model No.: _____

Specific Features: _____

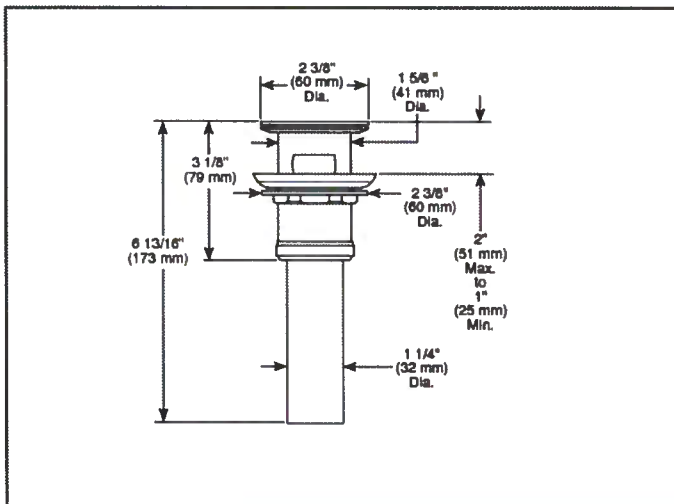

▲ Designate Proper Finish Suffix

BRIZO® GRID STRAINER LAVATORY DRAIN ASSEMBLY

- Grid Strainer Drain
- For Use with Lavatory Sinks With Overflow Drain Holes

STANDARD SPECIFICATIONS:

- Grid strainer drain.
- For use with lavatory sinks with overflow drain holes.
- Fits sinks with standard 1 5/8" drain hole size.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.2 / CSA B125.2

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-RP72412 Rev. A

Delta Faucet Company
Indianapolis, Indiana 46260
A Division of Masco Corporation of Indiana
© 2012 Masco Corporation of Indiana

Powder Bath

Kohler Toilet Seat K-4008-0


KOHLER®

GRIP-TIGHT REVEAL™ Q3™

Features

- Solid polypropylene plastic
- Closed-front
- Contoured seat for user comfort
- Quiet-Close™ lid and ring prevents slamming
- Quick-Release™ hinge caps snap open and seat pulls forward for removal
- Quick-Attach™ stainless steel fastener allows for top-mount screwdriver only installation
- Elegant lid design for a clean and sleek aesthetic
- Grip-Tight bumpers hold seat firmly in place

TOILET SEAT
K-4008
ALSO K-4009

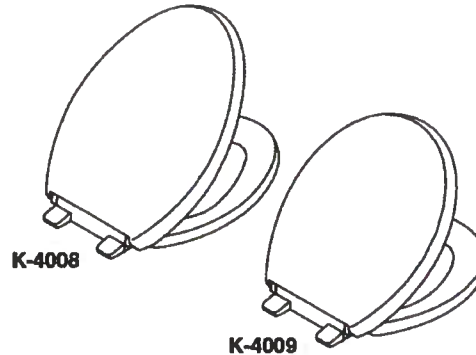

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.5

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-4008	Toilet seat – elongated closed-front	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4009	Toilet seat – round closed-front	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Product Specification

The toilet seat shall be made of solid polypropylene plastic. Product shall be available with closed-front and shall have Quiet-Close™ lid and ring that prevents slamming. Product shall have Quick-Release™ hinge caps that snap open to pull seat forward for removal. Product shall have Quick-Attach™ stainless steel fastener, which allows for top-mount screwdriver only installation. Product shall have elegant lid design for a clean and sleek aesthetic. Product shall have contoured seat for user comfort and grip-tight bumpers that hold seat firmly in place. The toilet seat shall be Kohler Model K-____-____.


Powder Bath

Kohler Toilet Seat K-4008-0 (continued)

GRIP-TIGHT REVEAL™ Q3™

Installation Notes

Install this product according to the installation guide.

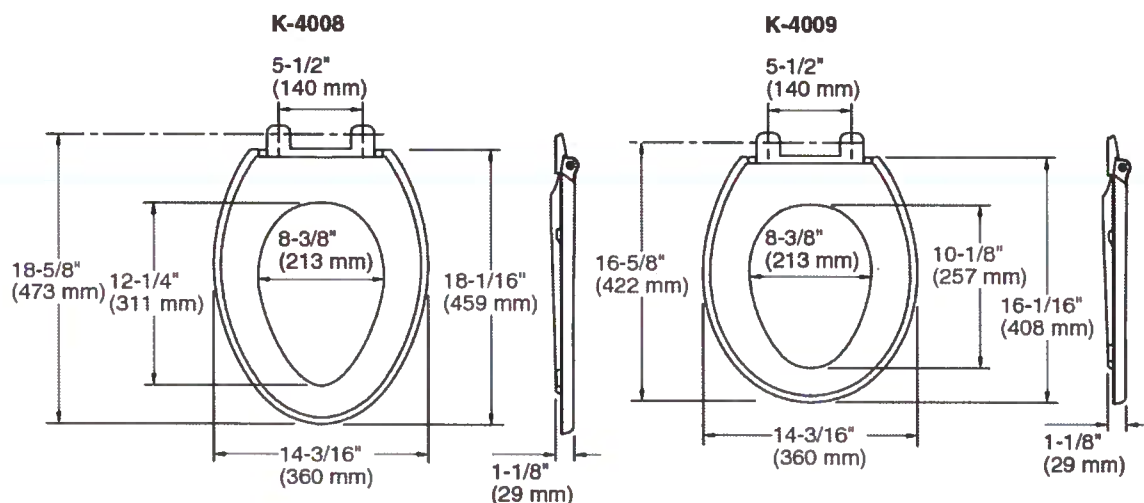

Product Diagram

GRIP-TIGHT REVEAL™ Q3™ TOILET SEAT
Page 2 of 2
1209726-4-A

THE BOLD LOOK
OF **KOHLER.**

Laundry

Kohler Laundry Sink 5798-3-NA

KOHLER®

Ballad™ Top-mount Utility Sink **K-5798-3**

Features

- 27-inch minimum base cabinet width.
- Single bowl.
- 11-1/4-inch depth provides generous workspace.
- Three faucet holes.
- SilentShield® sound-absorption technology offers quieter performance.
- Includes installation hardware.

Material

- 18-gauge stainless steel.

Installation

- Top-mount

Optional Accessories

K-3192 Sink Rack



Codes/Standards

ASME A112.19.3/CSA B45.4

Lifetime Limited Warranty for

KOHLER® Stainless Steel Sinks

See website for detailed warranty information.

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

12-20-2016 06:12


THE BOLD LOOK
OF **KOHLER.**

Laundry

Kohler Laundry Sink 5798-3-NA (continued)

KOHLER®

Ballad™
Top-mount Utility Sink
K-5798-3

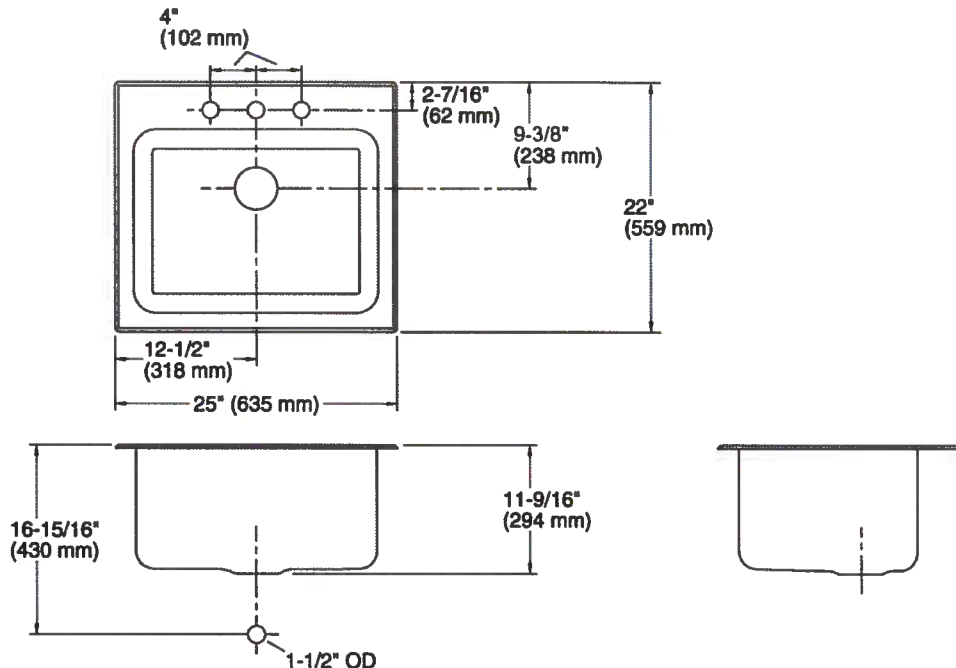

Technical Information

All product dimensions are nominal.

Installation:	Top-mount, Top-mount
Bowl area	Length: 21-1/4" (540 mm)
	Width: 15-3/4" (400 mm)
	Bowl depth: 11-5/16" (287 mm)
	Water depth: 11-5/16" (287 mm)
Number of deck holes:	3
Faucet hole(s):	1-7/16" (37 mm)
Drain hole:	3-3/4" (94 mm)

Notes

Install this product according to the installation instructions.

USA/Canada: 1-800-4KOHLER (1-800-456-4537)


Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

12-20-2016 06:12



THE BOLD LOOK
OF **KOHLER.**

Delta Faucet Pull-Out Spray Kitchen Faucet 9159-AR-DST

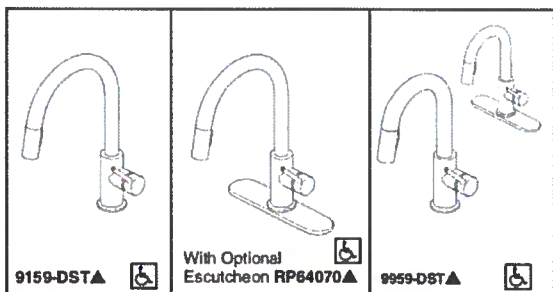

Submitted Model No.: _____

Specific Features: _____

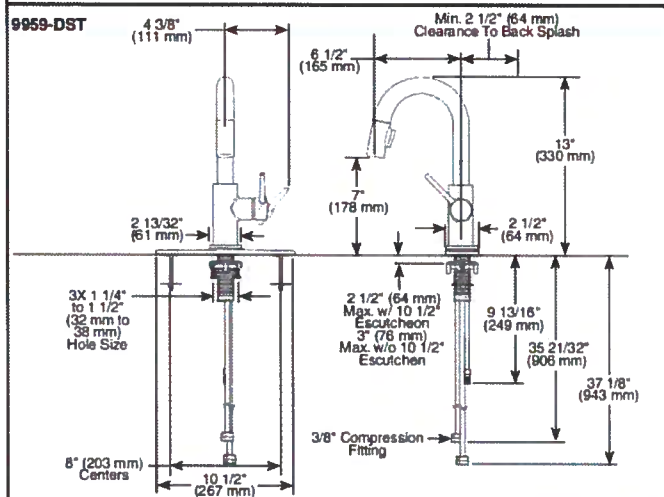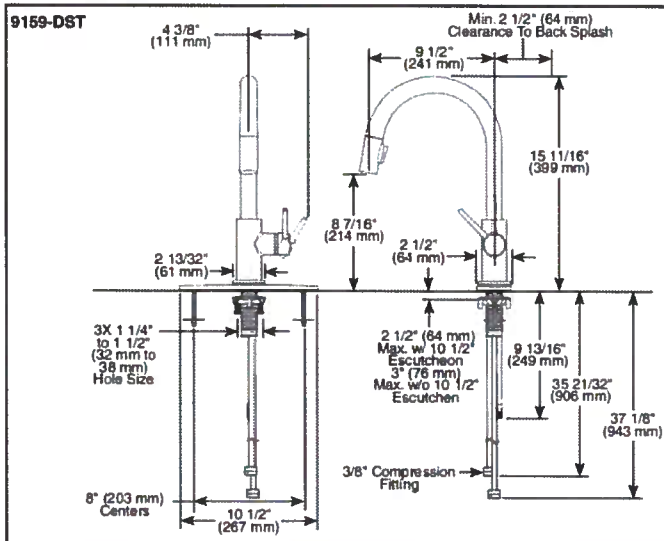

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-K-9159-DST Rev B



KITCHEN FAUCETS

- Trinsic™ Collection
- Single Handle Deck Mount
- 2-Function Pull-Down Sprayer
- Single or 3 Hole Sink Applications
- Centermount or 8" (203 mm) Centers w/
Optional 10 1/2" (267 mm) Escutcheon
- MagnaTite™ Magnetic Docking

STANDARD SPECIFICATIONS:

- Single handle, 2-function pull-down kitchen faucets for exposed mounting on single or three hole sinks
- Solid brass fabricated body
- 15 11/16" (399 mm) high, 9 1/2" (241 mm) long, spout swings 360°
- Lever handle. Control mechanism shall be full-motion valve cartridge
- Touch-Clean® sprayhead
- Quick connect hoses
- Pull-down wand operates in an aerated or spray mode via ergonomic buttons
- Red/blue indicator on handle button to indicate hot/cold temperature
- MagnaTite™ magnetic docking
- Dual integral check valves in sprayer
- Mounting wrench to assist in tightening mounting nut securely
- Hose travels inside mounting shank so it will not interfere with deck edges
- Keyed 10 1/2" (267 mm) escutcheon to help alignment and aid installation
- Flow rate 2.2 gpm max.


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

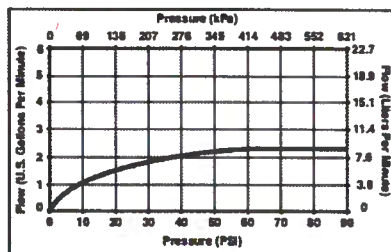

55 E. 111th Street, Indianapolis, Indiana 46280
395 Main Street, East, Mansfield, MA 01428-2822
© 2010 Delta Corporation of Indiana

PF1433

Basket Strainers Stainless Steel



Product Features

- 3-1/2 Standard grade
- Stainless steel body and basket
- Fixed post basket
- Replacement 3mm Rubber Locknut Washer available (PFBSG)

Model Numbers


- PF1433SS** Twist and lock with positive seal
PF1433BRSS Twist and lock with positive seal with brass slip nut and lock nut



PF1433SS

NO.	Part	PF1433SS	PF1433BRSS
1	Body	SS 430	SS 430
2	Washer	Rubber	Rubber
3	Washer	Paper	Paper
4	Lock nut	Zinc	Brass
5	Tailpiece nut	Zinc	Brass
6	Tailpiece washer	PE	PE
7	Basket	SS 430	SS 430
8	Basket bushing	CP brass	CP Brass
9	Post	CP brass	CP Brass
10	Handle	CP brass	CP Brass
11	Screw	SS	SS
12	Hex nut	CP brass	CP Brass
13	Stopper	SS	SS
14	Body bushing	CP brass	CP Brass
15	C ring	SS	SS

Product Specifications

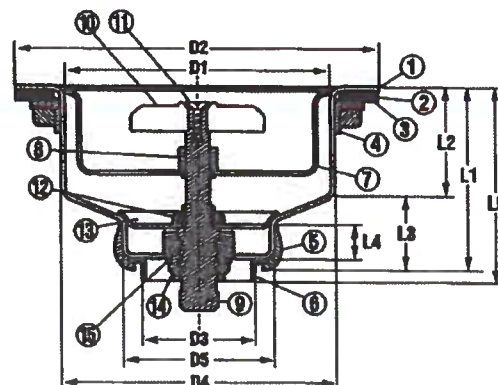

	D1	D2	D3	D4	D5	L1	L2	L3	L4	L5
Dimension	3.35"	4.40"	1.33"	3.32"	1.82"	2.56"	1.45"	1.11"	0.5"	2.6"

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.



Laundry

Maytag Electric Dryer MED8200FC




ELECTRIC DRYER


PRODUCT MODEL NUMBERS

MED3500F, MED5500F, MED8200F

Front view




Side view

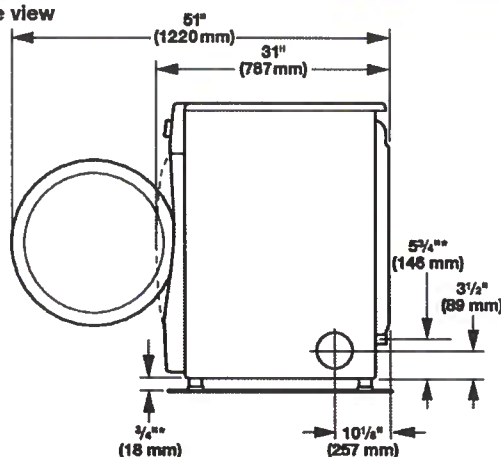


Back view

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

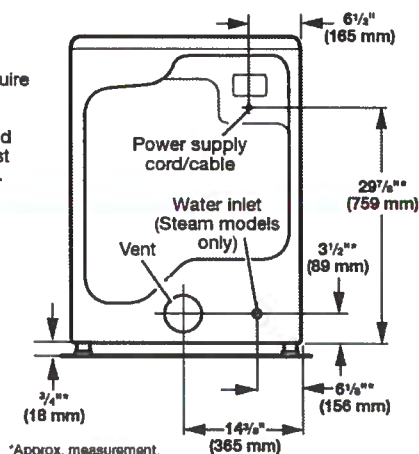

*Approx. measurement.

Recommended installation clearances

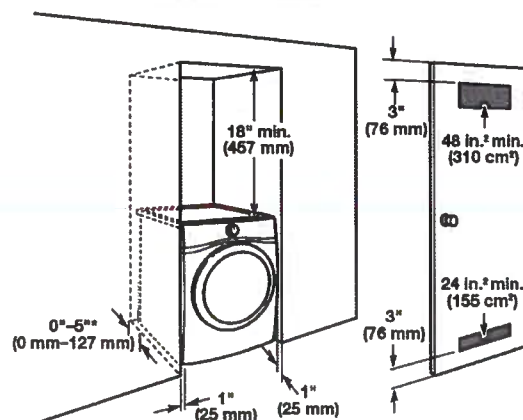

*0" (0 mm) spacing is allowed for straight-back venting only. For steam models only, inlet hose must not be kinked.

Spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

W10775223A
12/2015

INSTALLATION REQUIREMENTS

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit.

WATER (STEAM MODELS ONLY) REQUIREMENTS


The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses. Do not overtighten. Damage to the coupling can result.

VENTING REQUIREMENTS


Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vent. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

Exhaust hoods:

Recommended styles:




Louvered Hood



Box Hood

Acceptable style:



Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.
NOTE: Do not use vent runs longer than those specified in "Vent System Charts."
- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be DALV (Long Vent) - ELE - XXXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Laundry

Maytag Front Load Washer MHW8200FC




Front-Loading Washer


PRODUCT MODEL NUMBERS

MHW3000B, MHW3500B, MHW4000B, MHW4200B, MHW6000A, MHW7000A, MHW8000A, MHW3100D, MHW4100D, MHW4300D, MHW4400D, MHW5100D, MHW5400D, MHW7100D, MHW8100D, MHW3505F, MHW3500F, MHW5500F, MHW8200F


Washer Dimensions:

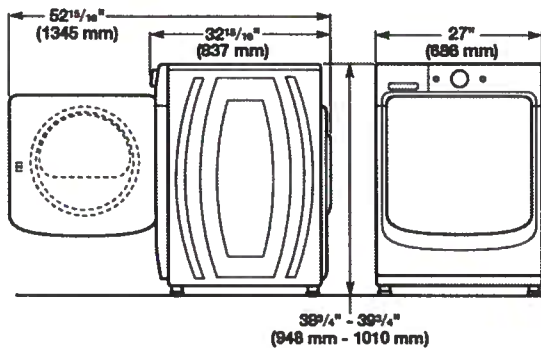

Undercounter installation - washer only:

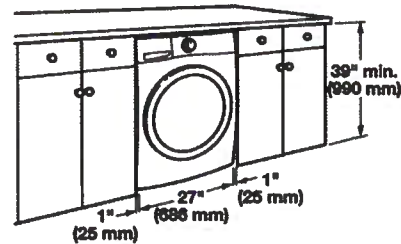


Recessed or closet installation - stacked washer and dryer

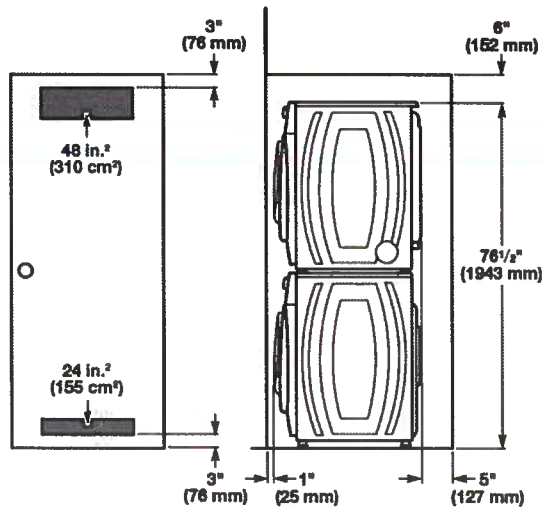

* Add spacing of 1" (25 mm) on all sides of washer/dryer.

Recessed area or closet installation (washer only):

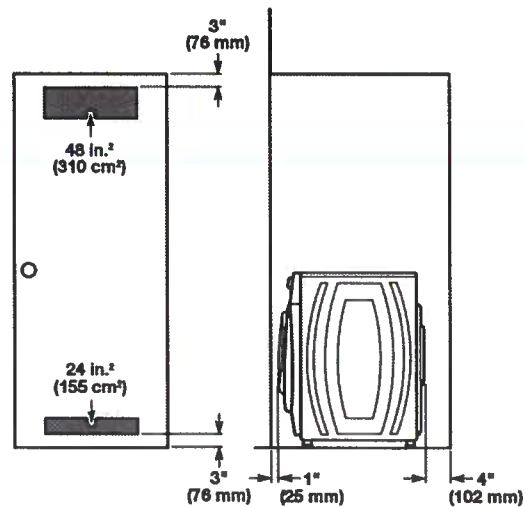


* Add spacing of 1" (25 mm) on all sides of washer.

W10631155B
12/2015

Laundry

Maytag Front Load Washer MHW8200FC (continued)

Custom cabinet installation (washer only):

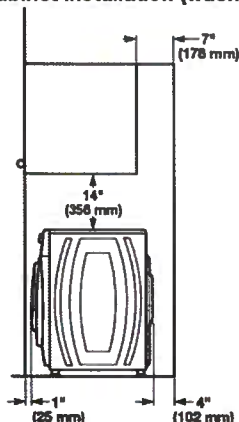

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

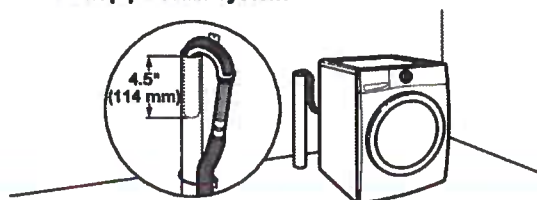


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Laundry tub drain system

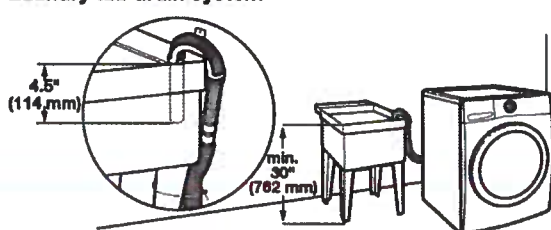


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

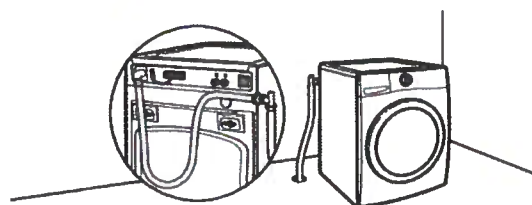

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Wall standpipe drain system

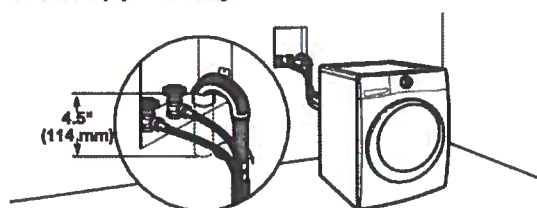


See requirements for floor standpipe drain system.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Master Bath


Brizo Freestanding Tub Filler T70135-NKLHP/HL7033-NK/R70100



T70135-ALHP

Submitted Model No.: _____

Specific Features: _____

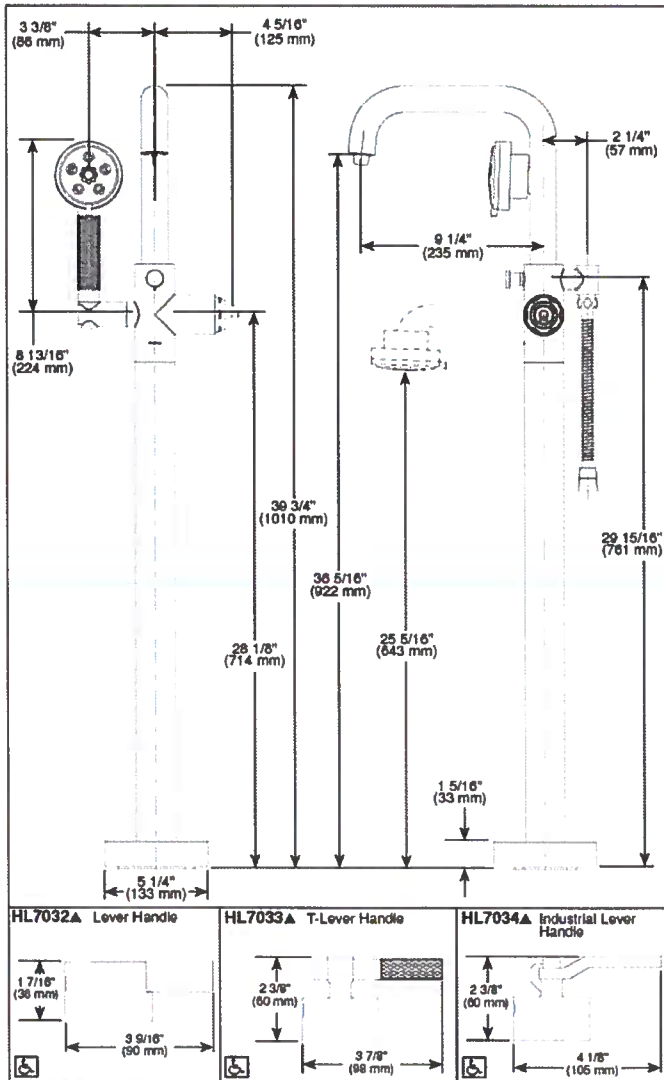

▲ Designate Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T70135LHP Rev. B

BRIZO® FREESTANDING TUB FILLER TRIM ONLY

- Litze™ Collection
- Single Handle Floor Mount

FEATURES:

- H₂Okinetic Technology®

STANDARD SPECIFICATIONS:

- Maximum handshower flow rate, 2.00 gpm @ 80 psi, 7.60 L/Min @ 552 kPa
- indexing handshower holder
- 60"-82" stretchable finished metal hose
- High flow ceramic mixing cartridge
- Single lever handle with hot and cold indicators
- Auto resetting diverter
- Certified dual check valves in handshower
- Drain not included
- Requires rough-in to complete installation:
 - R70100-WS with integrated stops
 - R70100 without stops, provides maximum flow
- Handles sold separately

WARRANTY


- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

WARNING: Risk of personal injury. Do not use the tub filler as a grab bar or support bar. Install this product according to the installation guide.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA Watersense® - Applies to handshower only - RP90054*

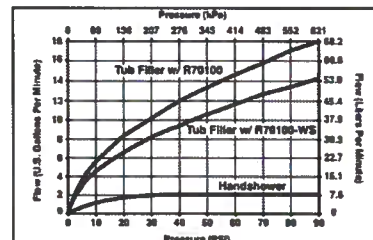

Brizo Kitchen & Bath Company


Indianapolis, Indiana 46260
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company



FICHE PRODUIT

EVANESCENCE 6634

66" X 34" X 28"

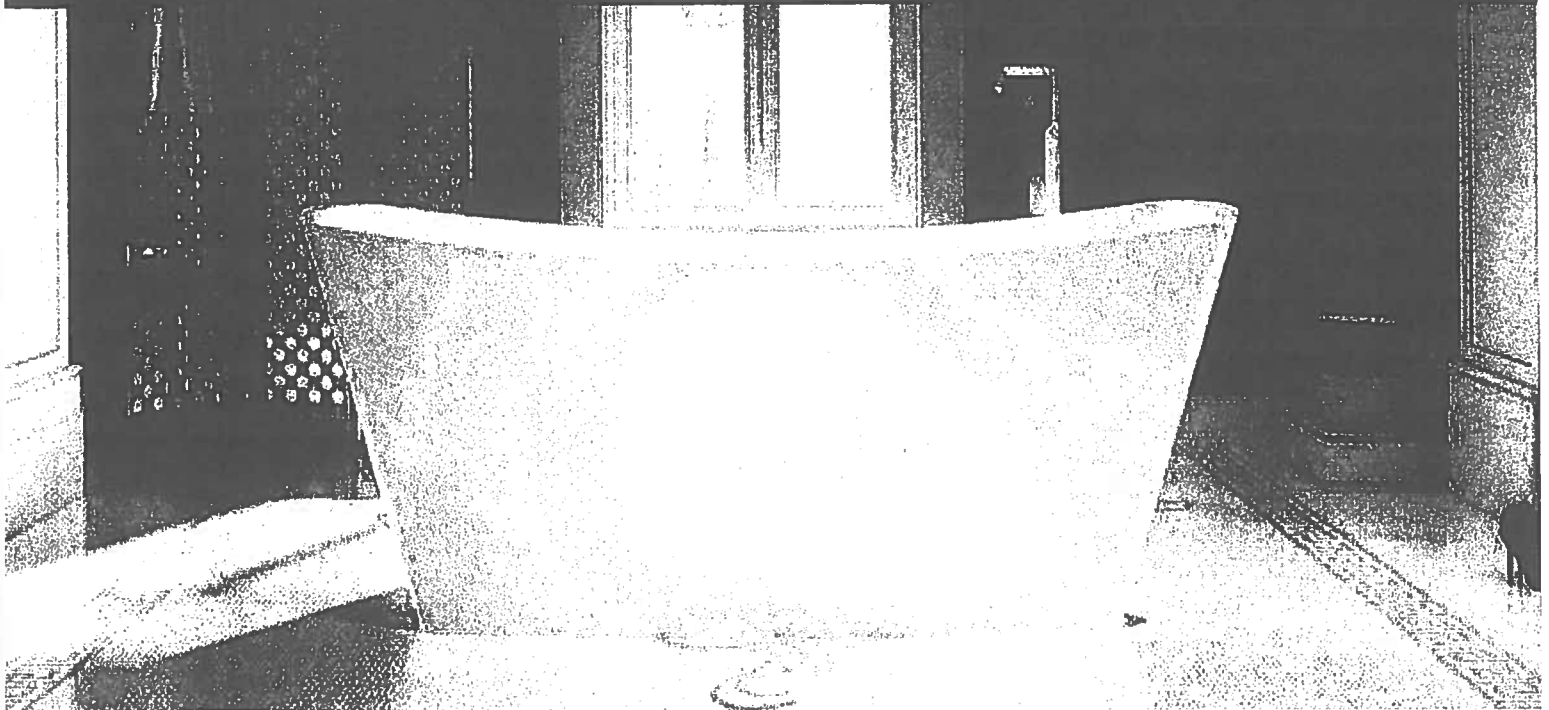

AUTOPORTANT

BAIN THERMOMASSEUR*	\$
BAIN	\$

THERMOMASSEUR (TMU)	
Jets	38
1 dossier chauffant	Inclus
1 appuie-tête chauffant	Inclus
Contrôle MiaMulti®*	Inclus
Geysair®	Inclus
AromaCloud®	n. d.
Chromothérapie Illuzio NOUVEAU	\$
2 ^e dossier chauffant (technologie avancée)	\$

BAIN	
AromaCloud®	n. d.
Chromothérapie Illuzio NOUVEAU	\$
WarmTouchShell®	\$
Contrôle DOT	Inclus avec la thérapie
2 ^e WarmTouchShell®	\$

CARACTÉRISTIQUES			
Type d'installation		Autoportant	
Nombre de places	2	Appuie-tête surélevés	2
Gallons américains	55	Drain et trop-plein intégré	Inst. & Incl.
Gallons Impériaux	46		

DRAIN ET TROP-PLEIN	
Chrome, Blanc	
Laiton, Nickel brossé, Nickel poli	

CARACTÉRISTIQUES

COULEUR

Standard



Blanc

OPTIONS FRAIS SUPPLÉMENTAIRES

FINI

Fini mat UltraVelour (blanc seulement)

\$

DRAIN DE PLANCHER**

Drain de plancher (Island Tub Drain™)

\$



N'oubliez pas que ce bain est disponible en blanc seulement.
INDIQUEZ LE FINI DU DRAIN ET DU TROP-PLEIN INTÉGRÉ.

* LE CONTRÔLE ET LA ROBINNERIE NE PEUVENT ÊTRE INSTALLÉS SUR LA PLAGE DU BAIN.
** LE ISLAND TUB DRAIN (ITD) EST REQUIS LORSQU'IL N'Y A PAS D'ACCÈS SOUS LE BAIN.

1 800 463.2187
Info@bainultra.com

Du lundi au jeudi, de 8 h à 20 h (HE)
Vendredi de 8 h à 17 h (HE)

 **BainUltra**

À la découverte de votre mieux-être*

www.bainultra.com

EVANESCENCE 6634 66" X 34" X 28"

ACCESSOIRES (OPTIONNELS)

GABARIT DE DÉCOUPE

90000065




AUTRES

- La robinetterie doit être autoportante ou installée au mur.
- La turbine doit être installée à distance.
- Les contrôles ne peuvent pas être installés sur le bain.

PRIX TOTAL

\$

INSTALLATION AUTOPORTANT

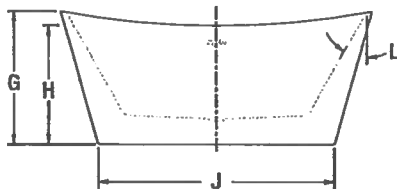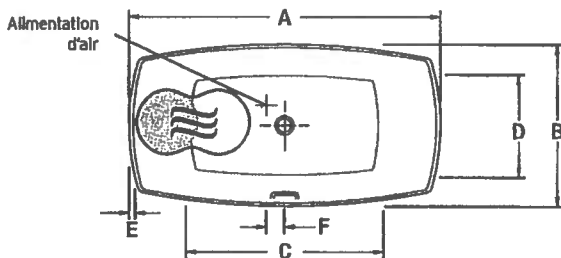

LETTRE	DÉSCRIPTION	MESURE
A	Longueur totale	66"
B	Largeur totale	34"
C	Longueur de la cuve	41 7/8"
D	Largeur de la cuve	21 1/2"
E	Largeur de la plage	1 1/4"
F	Distance de la prise d'air au centre du bain	4 1/4"
G	Hauteur totale de l'appui-tête	28"
H	Hauteur minimum au centre	25"
I	Niveau d'eau maximum	16"
J	Longueur de la base	50"
K	Largeur de la base	24 1/4"
L	Pente du dossier	31°

● Position du dossier chauffant (TMU)

Position WarmTouchShell

SPÉCIFICATIONS TECHNIQUES

Alimentation	Devrait correspondre à 70% ou plus en eau chaude requise de la capacité en eau du bain.
Turbine	Espace minimal de 18" X 22" requis pour l'accès à la turbine. Doit être branché à un circuit d'alimentation dédié de classe A 20 A. 120 V, 60 Hz, protégé par un disjoncteur détecteur de fuites à la terre (DDFT). Pour toute option supplémentaire, un circuit d'alimentation additionnel de 15 A. 120 V, 60 Hz, protégé par un DDFT est requis. Une prise d'air d'au moins 2 po X 4 po est nécessaire.

Nos produits doivent être installés uniquement par des professionnels certifiés, selon les instructions du Manuel Général BainUltra de même que conformément aux règles et codes fédéraux, provinciaux et municipaux (www.bainultra.com/fr/documentation/documentation).

Poids approx. pour transport	230 lbs
Puissance de la turbine	550 W
Puissance du chauffe-air	600 W

GARANTIE

Contrôles-LED-Geysair*	5 ans
Bain et turbine*	20 ans


*Certaines restrictions s'appliquent | www.bainultra.com/garantie

Les dimensions montrées représentent les côtés extérieurs et la capacité intérieure du produit. Les dimensions intérieures sont prises à hauteur des jets d'air. Il existe une variation de 1/4" (0.64 cm) pour chaque produit et les spécifications peuvent être modifiées suite à son amélioration. Les dimensions requises pour la préparation de l'emplacement et pour la construction de la structure peuvent être différentes. Ces spécifications ne peuvent servir au découpage. Aucune construction ne devrait être effectuée avant la réception du produit. BainUltra® n'assume aucune responsabilité pour les travaux entrepris avant la réception du produit.




Master Bath

Brizo Toilet Tank Lever 696335-NK



Submitted Model No.: _____

Specific Features: _____

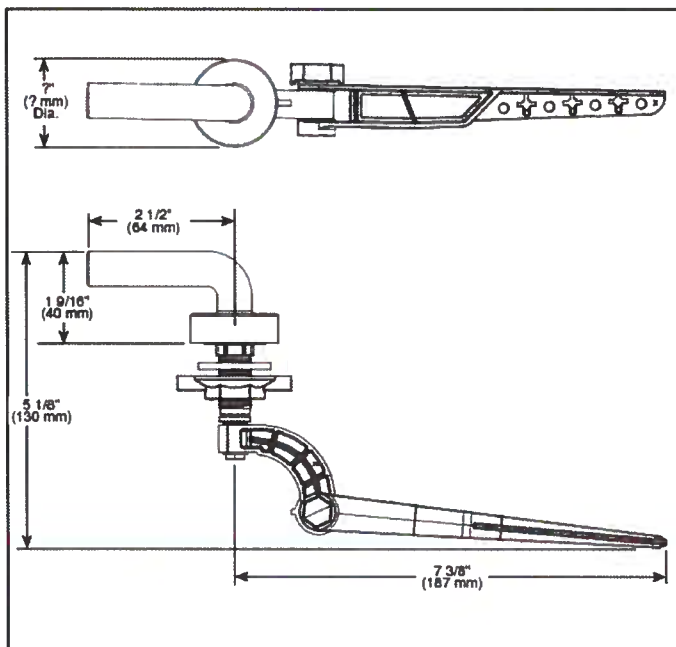

▲ Designate proper finish suffix

BRIZO

ACCESSORIES

- Litze™ Collection
- Universal Flush Lever

STANDARD SPECIFICATIONS:

- Universal front or left side mount tank lever

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.


Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-696335 Rev. A

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company



Master Bath

Brizo 8" Widespread Bathroom Sink Faucet 65335LF-NKLHP/HL5333-NK



Submitted Model No.: _____

Specific Features: _____

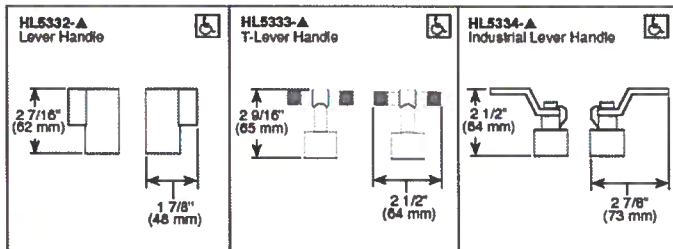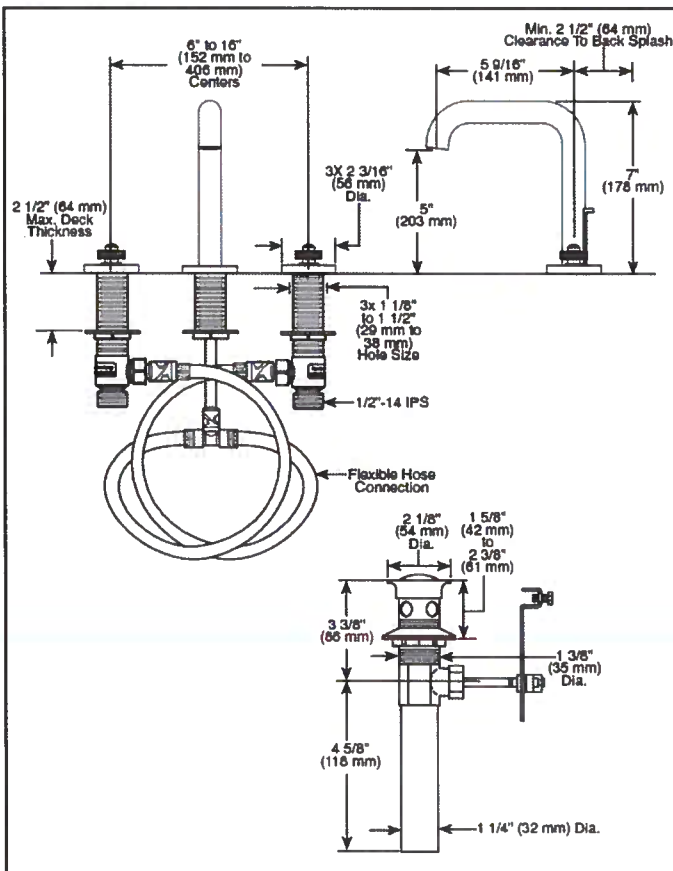

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-65335LF-LHP Rev. A

BRIZO

LAVATORY FAUCETS

- Litze™ Collection
- Two Handle Widespread Deck Mount

FEATURES:

- Handles attach to end valves by use of magnets inside handle. No set screw required

STANDARD SPECIFICATIONS:

- Maximum 1.50 gpm @ 60 psi, 5.70 L/min @ 414 kPa
- Maximum (ECO models only) 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- Three hole mount
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation
- 1/4 turn handle stops
- 1/2-14 NPSM threaded inlets
- Metal pop-up drain included
- Flexible hose connections
- Solid brass fabricated end valve and spout bodies
- Spout features water efficient laminar flow
- Handles sold separately

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company

* NOTE: Also use for
POWDER BATH.
Master Bath

Kohler Undermount Bathroom Sink K-2215-0

KOHLER

Ladena®
Bathroom Sink
K-2215

Features

- Vitreous china.
- Under-mount
- With overflow.
- Includes 1193643 clamp assembly.
- 23-1/4" (591 mm) x 16-1/4" (413 mm)

Recommended Accessories

K-8998 P-Trap

Components

Additional included component/s: Basin Clamp Assembly.



ADA

Codes/Standards

ASME A112.19.2/CSA B45.1

ADA





ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

7-9-2016 01:41




**THE BOLD LOOK
OF KOHLER.**

Master Bath

Kohler Undermount Bathroom Sink K-2215-0 (continued)

KOHLER

Ladena®
Bathroom Sink
K-2215

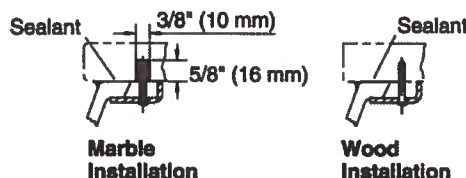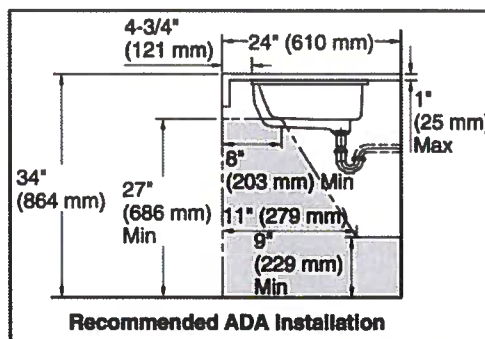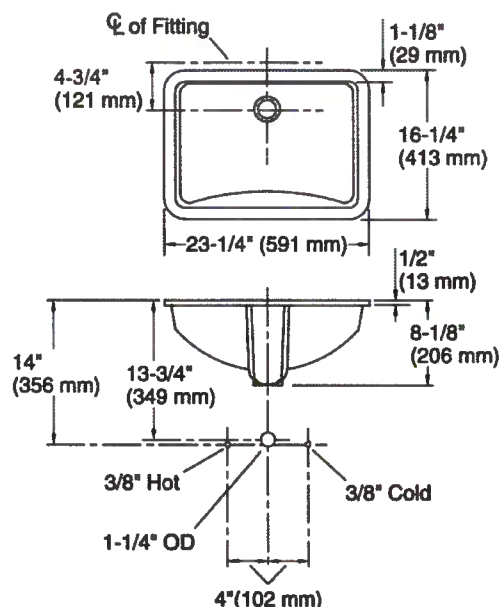

Technical Information

All product dimensions are nominal.

Installation:	Under-mount
Bowl area	Length: 20-7/16" (519 mm) Width: 13-1/2" (343 mm) Water depth: 4-5/8" (117 mm)
Drain hole:	1-3/4" (44 mm)
Template:	1002977-7, required, not included

Notes

Install this product according to the installation instructions.

The product diagram is based on the K-8998 adjustable P-trap with 1" (25 mm) of tailpiece exposed.

NOTICE: Countertop manufacturer or cutter must use the current product template available at www.kohler.com, or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cutout template is used.

ADA compliant when installed to the specific requirements of these regulations.

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

7-9-2016 01:41

THE BOLD LOOK
OF **KOHLER**

Master Bath

Kohler Two Piece Toilet K5709-0

KOHLER®

Corbelle®

ContinuousClean Two-Piece Toilet
K-5709

Features

- Vitreous China.
- Comfort Height® Elongated Bowl.
- Revolution 360™ swirl flushing system powered by AquaPiston®.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed skirted trapway.
- Patented ReadyLock™ installation system.
- 12" (305 mm) rough-in.
- CleanCoat® surface coating.
- 9-3/4" (248 mm) x 7-1/4" (184 mm) water area.
- 29 1/2" (749 mm) x 16-1/2" (419 mm) x 31-3/8" (797 mm).
- Floor mount / Floor outlet.
- ContinuousClean™ system

Recommended Accessories

K-4008 Reveal® Quiet-Close™ Elongated Toilet Seat
K-4108 C3®-230 Elongated Cleansing Toilet Seat
K-7637 Angle Supply with Stop (single)
K-5383 10" Rough-in Full Skirt Trap and Attachment System
K-5381 14" Rough-in Full Skirt Trap and Attachment System
K-20120-L Trip Lever
1023457 Wax Ring/Hardware Kit
1265114 Connector Hose

Components

Product includes:

K-4144 Elongated Toilet Bowl
K-5711 ContinuousClean Toilet Tank
Additional included component/s: Tank Cover, Trip Lever, and ReadyLock™ installation system.



ADA CSA B651 OBC

Codes/Standards

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	7	Black Black™

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

9-30-2018 07:14

THE BOLD LOOK
OF KOHLER.


Master Bath

Kohler Two Piece Toilet K5709-0 (continued)

KOHLER®

Corbelle®

ContinuousClean Two-Piece Toilet
K-5709

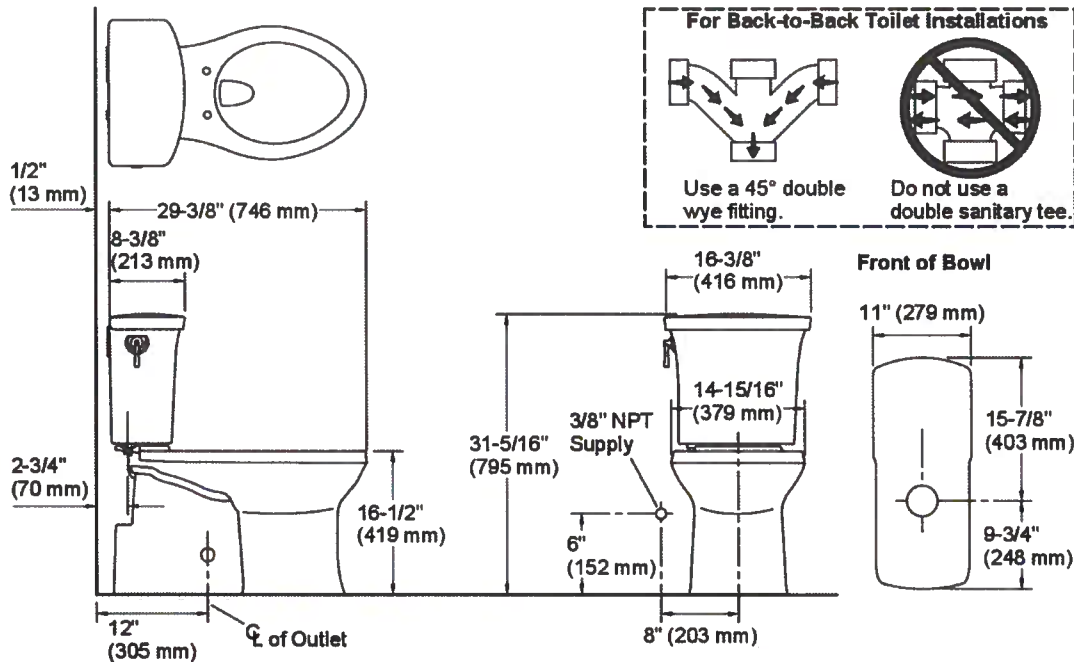

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount
Waste Outlet: Floor
Bowl shape: Elongated front
Flush type: Siphon jet
Rough-in: 12

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

9-30-2018 07:14

THE BOLD LOOK
OF **KOHLER.**

Master Bath

Kohler Toilet Seat K-4008-0


KOHLER®

GRIP-TIGHT REVEAL™ Q3™

Features

- Solid polypropylene plastic
- Closed-front
- Contoured seat for user comfort
- Quiet-Close™ lid and ring prevents slamming
- Quick-Release™ hinge caps snap open and seat pulls forward for removal
- Quick-Attach™ stainless steel fastener allows for top-mount screwdriver only installation
- Elegant lid design for a clean and sleek aesthetic
- Grip-Tight bumpers hold seat firmly in place

TOILET SEAT
K-4008
ALSO K-4009

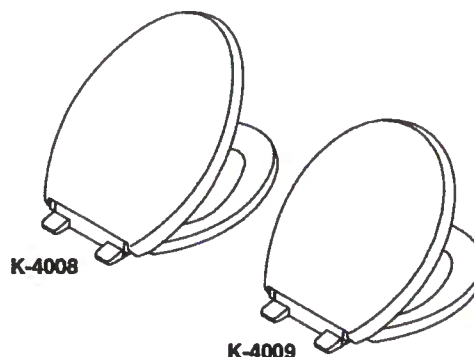

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.5

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
		<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4008	Toilet seat – elongated closed-front	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4009	Toilet seat – round closed-front	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Product Specification

The toilet seat shall be made of solid polypropylene plastic. Product shall be available with closed-front and shall have Quiet-Close™ lid and ring that prevents slamming. Product shall have Quick-Release™ hinge caps that snap open to pull seat forward for removal. Product shall have Quick-Attach™ stainless steel fastener, which allows for top-mount screwdriver only installation. Product shall have elegant lid design for a clean and sleek aesthetic. Product shall have contoured seat for user comfort and grip-tight bumpers that hold seat firmly in place. The toilet seat shall be Kohler Model K-____-____.


Master Bath

Kohler Toilet Seat K-4008-0 (continued)

GRIP-TIGHT REVEAL™ Q3™

Installation Notes

Install this product according to the installation guide.

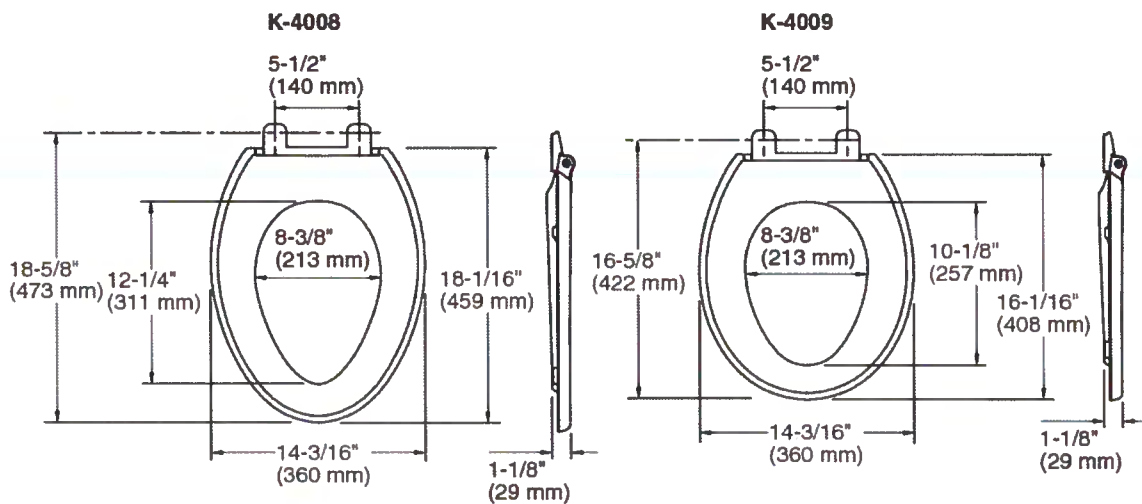


Product Diagram

GRIP-TIGHT REVEAL™ Q3™ TOILET SEAT
Page 2 of 2
1209726-4-A

THE BOLD LOOK
OF **KOHLER.**



Master Bath

Brizo Thermostatic / Volume Control Trim T75535-NKLHP



Submitted Model No.: _____

Specific Features: _____

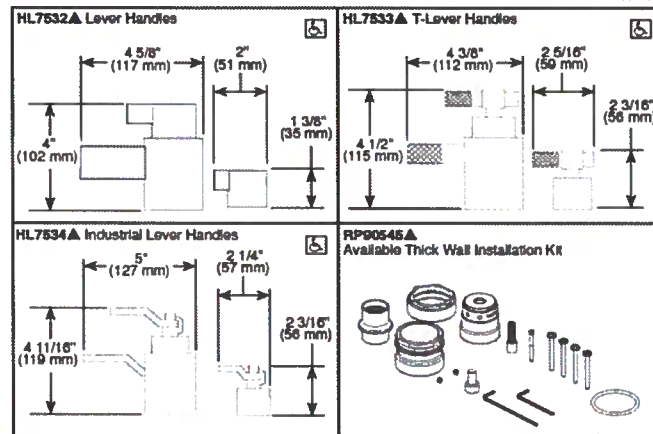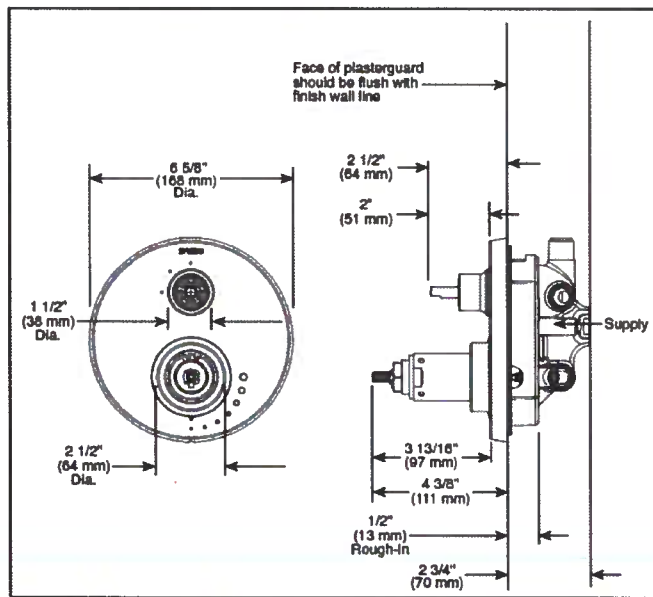

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T75535-LHP Rev. B

BRIZO®

INTEGRATED SHOWER DIVERTER TRIM

- Litze™ Bath Collection
- MultiChoice® Valve Trim with Three Function Diverter (T75535-LHP)
- MultiChoice® Valve Trim with Six Function Diverter (T75635-LHP)

FEATURES:

- TempAssure® thermostatic valve cartridge
- Three or six function diverter

STANDARD SPECIFICATIONS:

- Main control utilizes thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to $\pm 3.6^\circ\text{F}$.
- Back-to-back installation capability.
- For use with MultiChoice® Universal Integrated Shower Diverter Rough (R75000 Series)
- Top handle controls diverter functions.
- Bottom (2) handles control volume and temperature.
- Field adjustable to limit handle rotation into hot water zone.
- Bottom handle 90° Maximum rotation.
- Hot/cold indicator markings.
- Three function diverter (T75535-ΔLHP) has 2 individual positions and 1 shared position.
- For two individual functions, no shared functions, order additional RP72123.
- Six function diverter (T75635-ΔLHP) has 3 individual positions and 3 shared positions.
- For three individual functions, no shared functions, order additional RP72124.
- 1/2" rough-in.
- Cartridges included.
- Standard installation allows up to 1 1/8" finished wall thickness.
- Thick wall installation kit RP90545▲ can be ordered to allow for up to 2 1/8" finished wall thickness.
- Handles sold separately. T-Lever handles have textured knurling detail. Industrial Lever handles are debossed with TEMP and VOL letters.
- Not recommended for tub spout applications.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1


Maximum Flow Rate Guide					
Rough	Cartridge	Outlet	40 psi	60 psi	80 psi
R75000	TempAssure® Thermostatic	Shower	5.9 gpm	7.2 gpm	8.3 gpm
R75000-WS	TempAssure® Thermostatic	Shower	5.3 gpm	6.5 gpm	7.4 gpm

Based on 6 Setting Diverter

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company



Master Bath

Brizo Tub & Shower Rough In Valve R75000

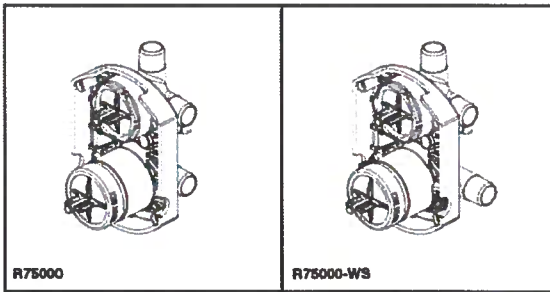

Submitted Model No.: _____

Specific Features: _____

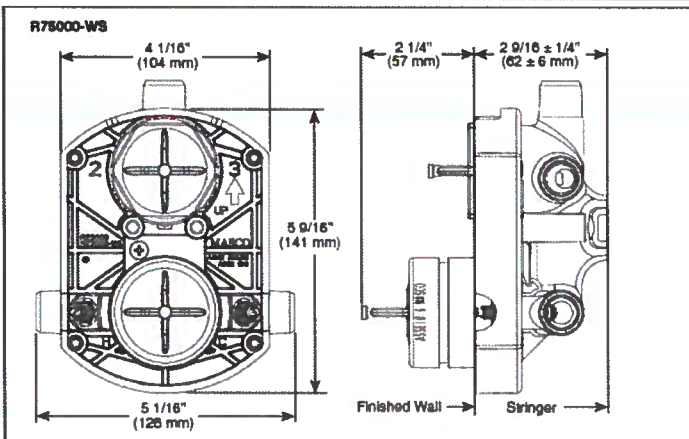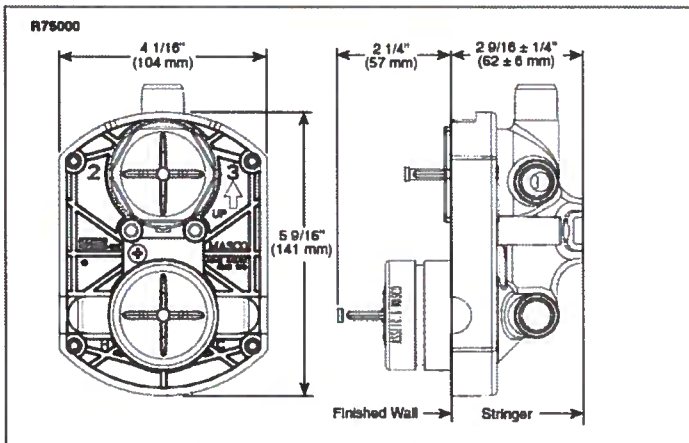

RP90545A
Available Thick Wall Installation Kit



Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R75000 Rev. A

BRIZO

MULTICHoice® UNIVERSAL INTEGRATED SHOWER DIVERTER ROUGH

- R75000 (Shower Only)
- R75000-WS (Shower Only with Stops)

STANDARD SPECIFICATIONS:

- Forged brass body
 - Back-to-Back installation capabilities
 - Three port diverter
 - Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap
 - Accepts Brizo (3) three or (6) six function diverter cartridges plus all MultiChoice® cartridges.
 - Plug provided for 3 setting diverter installation.
 - Cartridges ship with trim
 - Non-shared diverter cartridges also available (RP72123 and RP72124)
 - 1/2" outlets and connections
 - Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat
 - Sweat onto 1/2" C.W.T. or accepts 1/2" iron pipe, PEX or CPVC adapters
 - Standard installation accommodates finished wall thickness up to 1 1/8"
 - Thick wall installation kits can be ordered to allow for up to 2 1/8" finish wall thickness (order by valve type).
 - TempAssure® Thermostatic with Diverter Trim Extension Kit available (RP90545A)
 - Not recommended for tub spout applications
- Note: No tub outlet
Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting)

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries); or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Maximum Flow Rate Guide					
Rough	Cartridge	Outlet	40 psi	60 psi	80 psi
R75000	Thermostatic	Shower	8.9 gpm	7.2 gpm	8.3 gpm
R75000-WS	Thermostatic	Shower	5.3 gpm	6.5 gpm	7.4 gpm

Based on 6 Setting Diverter

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company

Master Bath

Brizo Faucet Handle HL7533-NK

Product Details and Dimensions

BRIZO

Brizo HL7533-NK "Litze" Faucet Handle



Details and Dimensions

Additional
Information

- ◆ Handle For Temperature
Thermostatic/Diverter Trim
- ◆ Knurled Handle Kit

Handle Type

Lever


ADA Compliant

Yes

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.



Master Bath

Brizo Shower Head 87435-NK

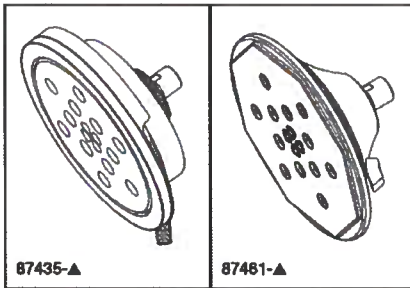

Submitted Model No.: _____

Specific Features: _____

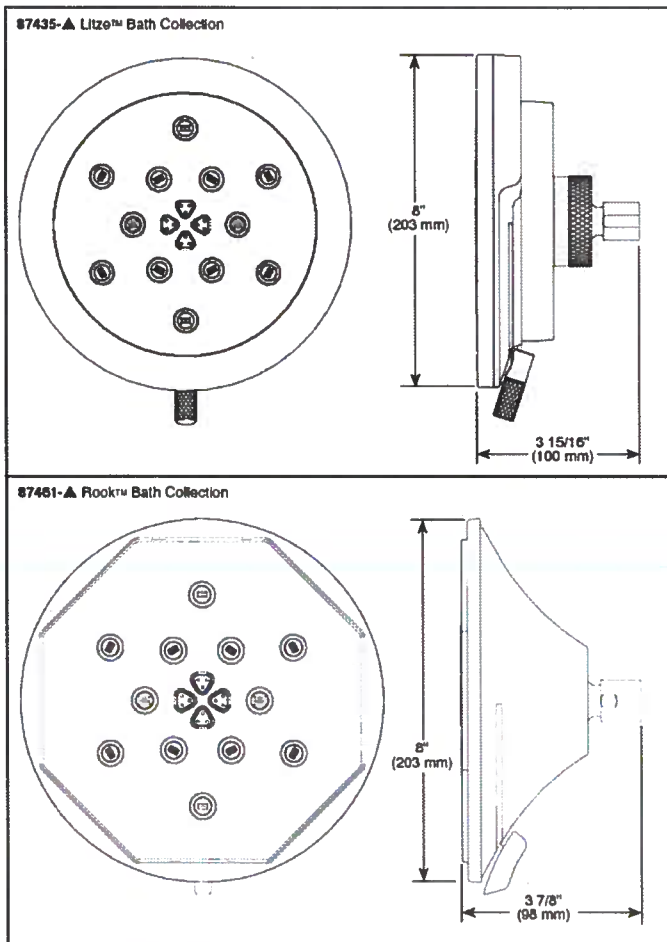

▲ Designate finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-87435 Rev. A

BRIZO® MULTI-FUNCTION SHOWERHEAD

■ 4-Function Showerhead Featuring
H₂Okinetic Technology®

STANDARD SPECIFICATIONS:

- Showerhead has 1/2"-14 NPSM female connection
- Max. 2.00 gpm @ 80 psi, 7.60 L/min @ 550 kPa
- Wrench flats for tightening
- Showerhead ball nut pivots, rotates and provides extra thread coverage
- Lever function control

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Altec Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company

Master Bath


Brizo Slidebar Mount Hand Shower 88735-NK

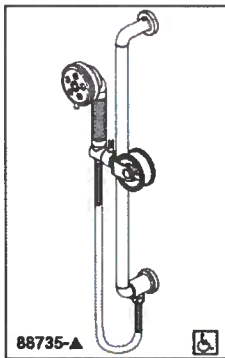

88735-▲

Submitted Model No.:

Specific Features:

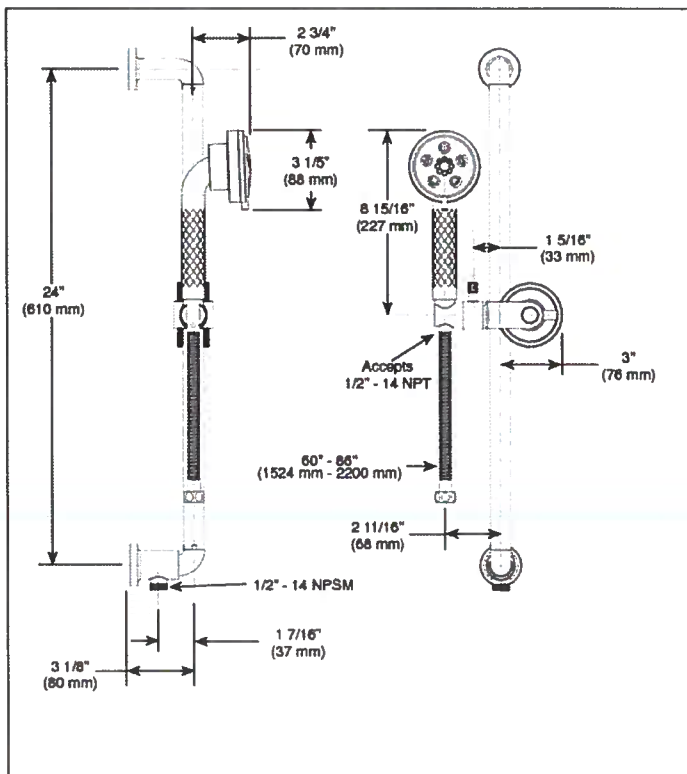

▲ Designate finish suffix

Spray Pattern



H₂Okinetic
Technology®



Messaging
Spray



Pause

- ◆ Your Brizo Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-88735 Rev. A

BRIZO® HANDSHOWER WITH SLIDE BAR

■ Litze™ Collection

FEATURES:

- Multi function handshower featuring H₂Okinetic Technology®

STANDARD SPECIFICATIONS:

- 2.00 gpm @ 80 psi, 7.60 L/min @ 552 kPa
- Wand bar with adjustable slide (allows for adjustable shower height). Not to be used as a grab bar. Not ADA compliant
- 60-66" (1524mm-2200 mm) stretchable finished metal hose
- Wand bar includes integrated elbow for hose connection
- Slide bar can be installed with hose connection on top if desired

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46260
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company

Master Bath


Brizo Shower Arm RP81434NK

Product Details and Dimensions

BRIZO

**Brizo RP81434NK
Shower Arm**

Details and Dimensions

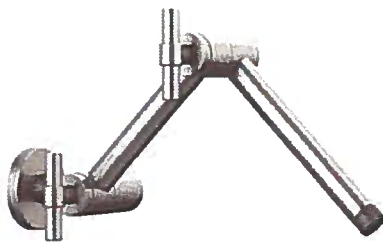

Connection Size	1/2" NPT
Shower Arm Length	16"

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

Master Bath


Brizo Paper Holder 695035-NK



695035A

Submitted Model No.: _____

Specific Features: _____

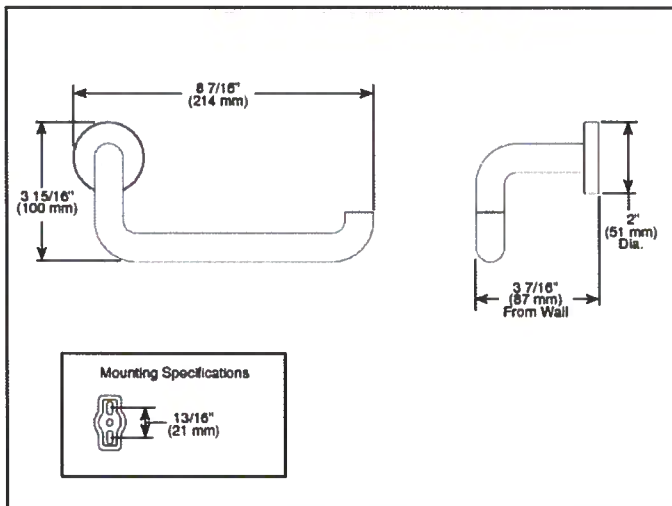

BRIZO

ACCESSORIES

- Litze™ Bath Collection
- Tissue Holder



STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, try finding a wood stud to anchor this accessory.
- Mounting hardware and mounting instructions included with product.
- Note: Plastic anchors, screw, toggle bolts, and mounting brackets are included with the mounting hardware.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

▲ Designate proper finish suffix

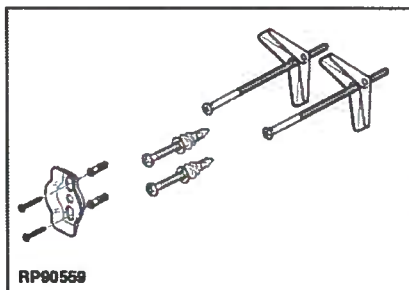


Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-695035 Rev. A

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company


Master Bath

Brizo Robe Hook 693537-NK





Submitted Model No.: _____

Specific Features: _____

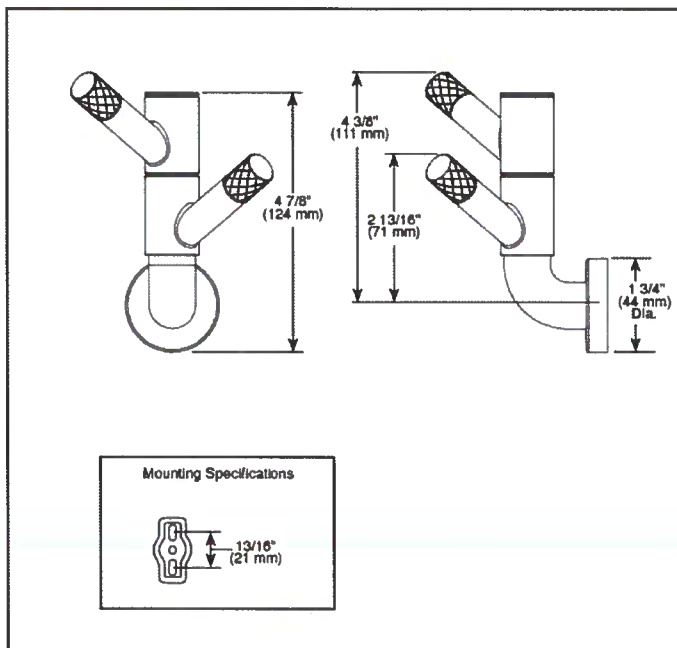

▲ Designate proper finish suffix

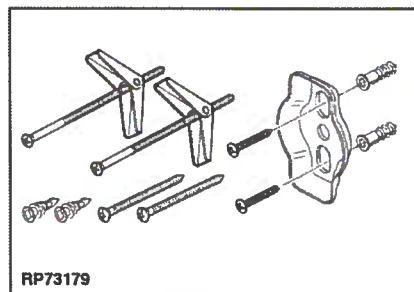

BRIZO®

ACCESSORIES

- Litze™ Bath Collection
- Double Rotating Robe Hook

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, try finding a wood stud to anchor this accessory.
- Mounting hardware and mounting instructions included with product.
- Note: Plastic anchors, screw, toggle bolts, and mounting brackets are included with the mounting hardware.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.


Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-693537 Rev. A

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company

Master Bath


Brizo Towel Ring 694735-NK




694735 ▲

Submitted Model No.: _____


Specific Features: _____

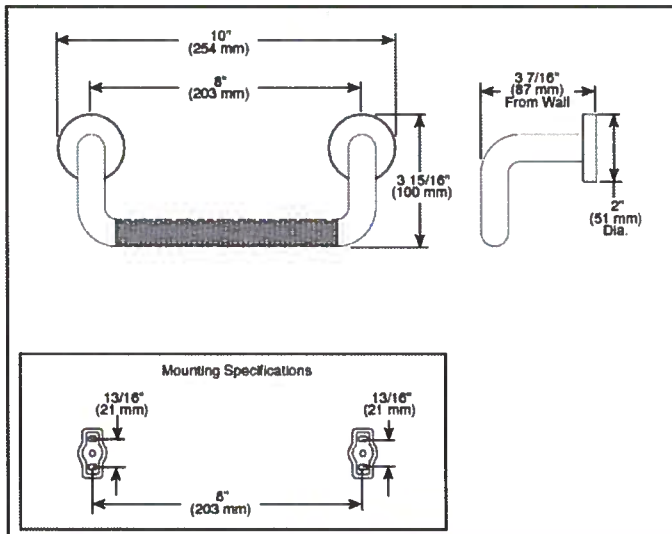

▲ Designate proper finish suffix

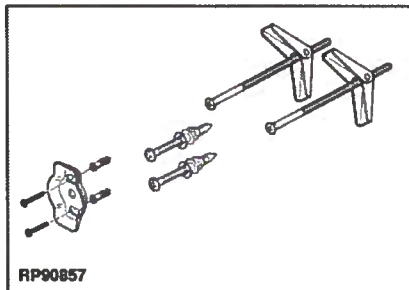

RP90857



RP70613

BRIZO

ACCESSORIES

- Litze™ Collection
- 8" Towel Bar

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, try finding a wood stud to anchor at least one end of this accessory.
- Mounting hardware and mounting instructions included with product.
- Note: Plastic anchors, screws, toggle bolts, and mounting brackets are included with the mounting hardware.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.


Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-694735 Rev. A

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company

Master Bath


Brizo Towel Bar 692435-NK




692435 ▲

Submitted Model No.: _____


Specific Features: _____

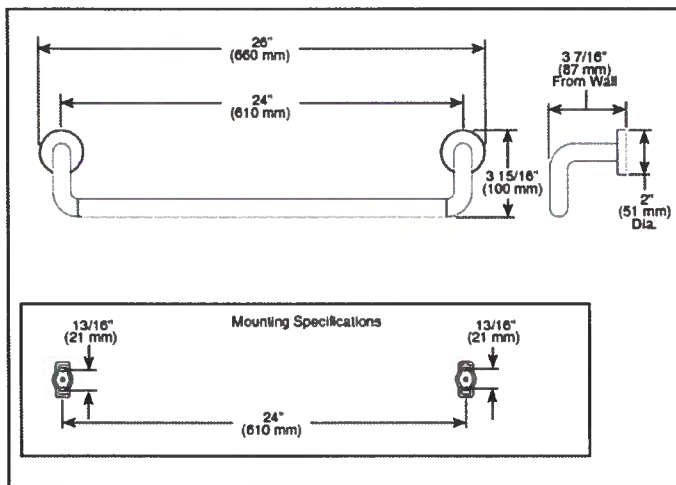

▲ Designate proper finish suffix

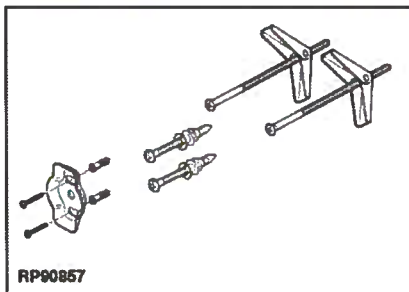

RP90857



RP70613

BRIZO[®]

ACCESSORIES

- Litze™ Collection
- 24" Towel Bar

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, try finding a wood stud to anchor at least one end of this accessory.
- Mounting hardware and mounting instructions included with product.
- Note: Plastic anchors, screws, toggle bolts, and mounting brackets are included with the mounting hardware.


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.



BSP-A-692435 Rev. A

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46260
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company



Submitted Model No.: _____

Specific Features: _____

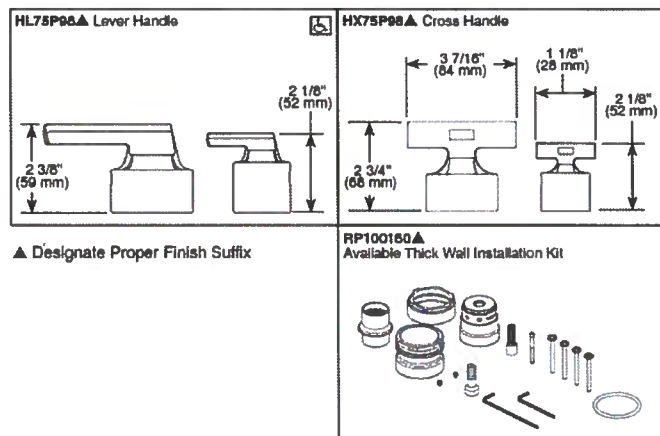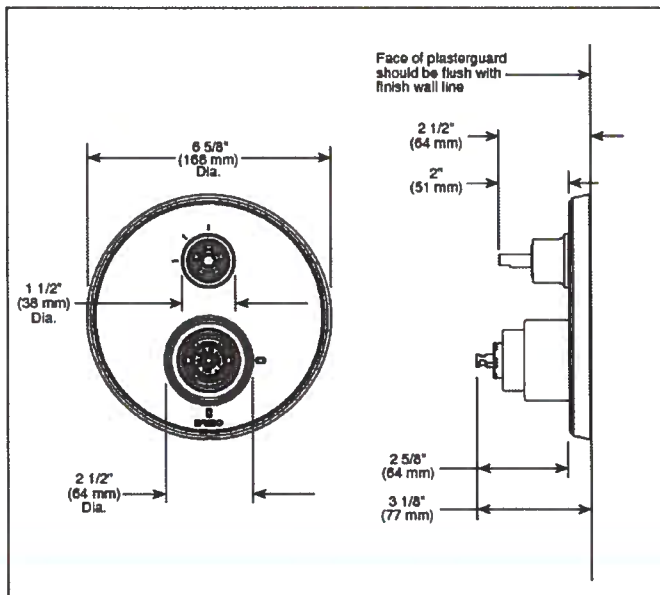

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T75P598-LHP Rev. B

BRIZO

INTEGRATED SHOWER DIVERTER TRIM

- Levor™ Bath Collection
- MultiChoice® Valve Trim with Three Function Diverter (T75P598-LHP)
- MultiChoice® Valve Trim with Six Function Diverter (T75P698-LHP)

FEATURES:

- Monitor® 14 series pressure balanced bath mixing valve

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- Back-to-back installation capability
- For use with MultiChoice® Universal Integrated Shower Diverter Rough (R75000 Series)
- Top handle controls diverter functions.
- Bottom handle controls on/off and temperature.
- Field adjustable to limit handle rotation into hot water zone.
- Bottom handle 120° maximum rotation.
- Red/Blue temperature indicator markings.
- Three function diverter (T75P598-ΔLHP) has 2 individual positions and 1 shared position.
- For two individual functions, no shared functions, order additional RP72123.
- Six function diverter (T75P698-ΔLHP) has 3 individual positions and 3 shared positions.
- For three individual functions, no shared functions, order additional RP72124.
- 1/2" rough-in.
- Cartridges included.
- Standard installation allows up to 1 1/8" finished wall thickness.
- Thick wall installation kit RP100160Δ can be ordered to allow for up to 2 1/8" finished wall thickness.
- Handles sold separately.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only

Maximum Flow Rate Guide					
Rough	Cartridge	Outlet	40 psi	60 psi	80 psi
R75000	Pressure Balance	Shower	4.1 gpm	5.0 gpm	6.8 gpm
R75000-WS	Pressure Balance	Shower	3.9 gpm	4.8 gpm	5.6 gpm


Based on 6 Setting Diverter

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46260
A Division of Ingersoll Rand Corporation of Indiana
© 2018 Brizo Kitchen & Bath Company

Product Details and Dimensions

BRIZO

**Brizo HX75P98-SL
"Levoir"
Faucet Handle**

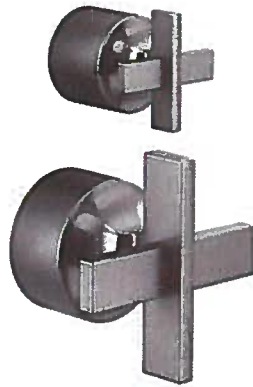


Details and Dimensions

Handle(s) Included	Yes
Number Of Handles	2 Handle
Handle Type	Cross

Disclaimer – This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.



Jr. Master

Brizo Tub & Shower Rough In Valve R75000

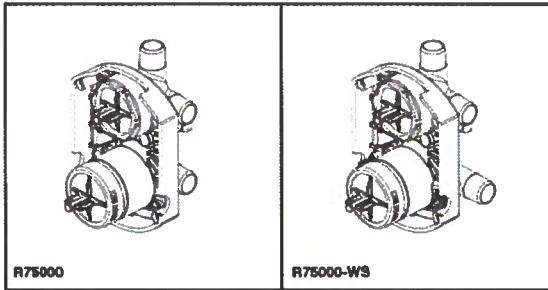

Submitted Model No.: _____

Specific Features: _____

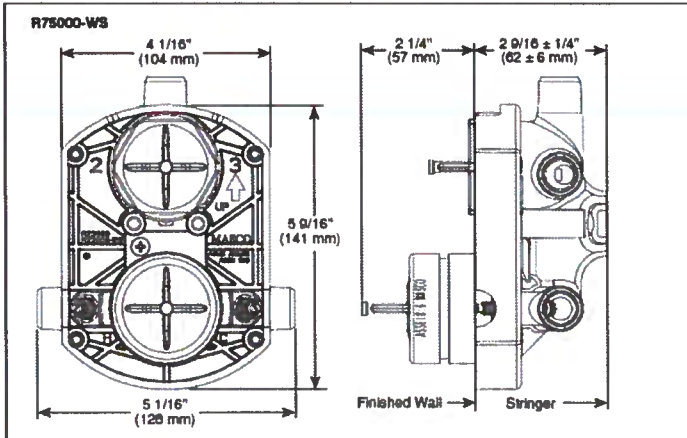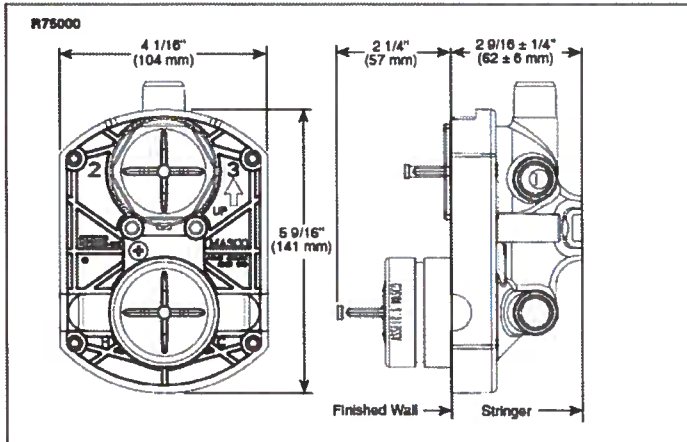

RP90545A
Available Thick Wall Installation Kit



Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R75000 Rev. A

BRIZO

MULTICHOICE® UNIVERSAL INTEGRATED SHOWER DIVERTER ROUGH

- R75000 (Shower Only)
- R75000-WS (Shower Only with Stops)

STANDARD SPECIFICATIONS:

- Forged brass body
 - Back-to-Back Installation capabilities
 - Three port diverter
 - Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap
 - Accepts Brizo (3) three or (6) six function diverter cartridges plus all MultiChoice® cartridges.
 - Plug provided for 3 setting diverter installation.
 - Cartridges ship with trim
 - Non-shared diverter cartridges also available (RP72123 and RP72124)
 - 1/2" outlets and connections
 - Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat
 - Sweat onto 1/2" C.W.T. or accepts 1/2" iron pipe, PEX or CPVC adapters
 - Standard installation accommodates finished wall thickness up to 1 1/8"
 - Thick wall installation kits can be ordered to allow for up to 2 1/8" finish wall thickness (order by valve type).
 - TempAssure® Thermostatic with Diverter Trim Extension Kit available (RP90545A)
 - Not recommended for tub spout applications
- Note: No tub outlet
Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting)

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries); and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1

Maximum Flow Rate Guide					
Rough	Cartridge	Outlet	40 psi	60 psi	80 psi
R75000	Thermostatic/Thermomix®	Shower	5.9 gpm	7.2 gpm	8.3 gpm
R75000-WS	Thermostatic/Thermomix®	Shower	5.3 gpm	6.5 gpm	7.4 gpm

Based on 6 Setting Diverter


Brizo Kitchen & Bath Company
Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company

Brizo Slidebar Mount Hand Shower 88798-SL

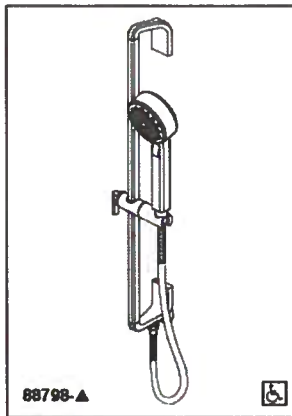

Submitted Model No.:

Specific Features:

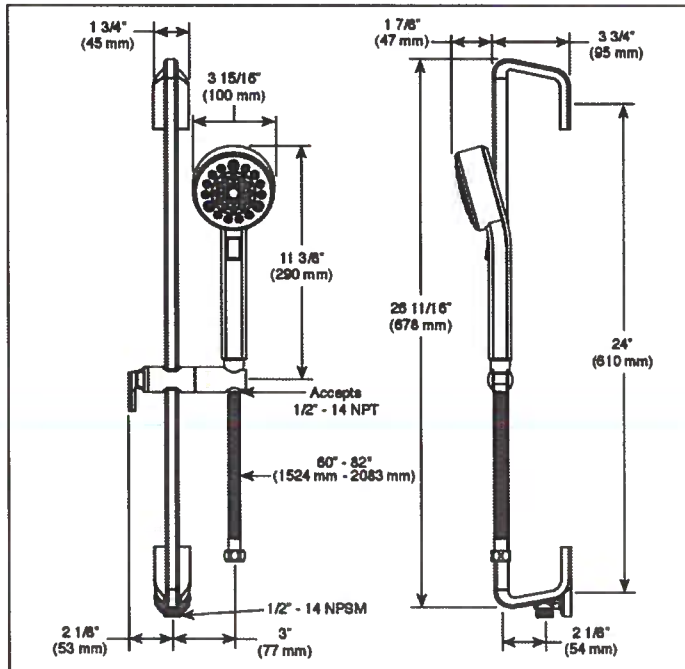

▲ Designate finish suffix

Spray Pattern



Full Body Spray

H₂Okinetic
Technology®

Massaging Spray



Pause

- ◆ Your Brizo Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-55798 Rev. A

BRIZO

HAND SHOWER W/SLIDEBAR

Levoir™ Bath Collection

FEATURES:

- Multi function hand shower featuring H₂Okinetic Technology®

STANDARD SPECIFICATIONS:


- Maximum 1.75 gpm @ 80 psi, 6.6 l/min @ 550 kPa
- Wall bar with adjustable slide (allows for adjustable shower height). Not to be used as a grab bar.
- 60" - 82" (1524 mm - 2083 mm) stretchable finished metal hose
- Wall bar includes integrated elbow for hose connection
- Slide bar can be installed with hose connection on top if desired

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ♦
-  Indicates compliance to
 ICC/ANSI A117.1 - Applies to handhower only
- EPA WaterSense®

Brizo Kitchen & Bath Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2018 Brizo Kitchen & Bath Company


Jr. Master

Brizo Shower Arm RP92044SL



Submitted Model No.: _____

Specific Features: _____

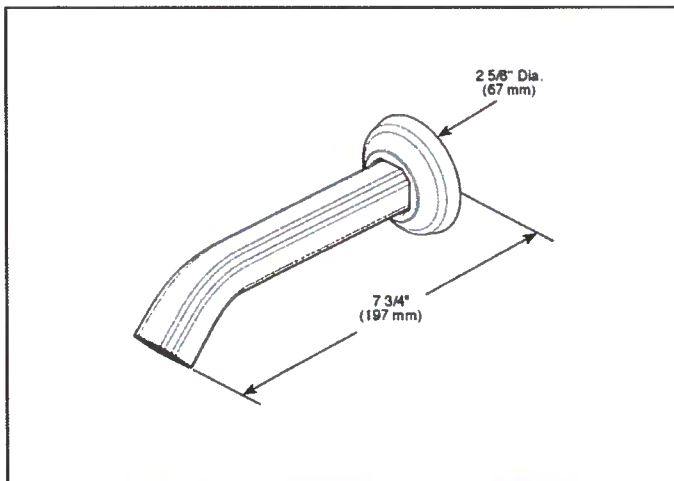

▲ Designate proper finish suffix

BRIZO®

SHOWER ARM AND FLANGE

■ Levoir™ Collection

STANDARD SPECIFICATIONS:

- Solid brass construction
- Intended for use with 87498 showerhead

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase
 - 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase
- No warranty is provided on batteries

COMPLIES WITH:

- AS/AE A112.18.1 / CSA B125.1

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-RP92044 Rev. A

Brizo Kitchen & Bath Company


Indianapolis, Indiana 46290

A Division of Masco Corporation of Indiana

© 2017 Brizo Kitchen & Bath Company


Jr. Master

Brizo Shower Head 87498-SL



Submitted Model No.: _____

Specific Features: _____

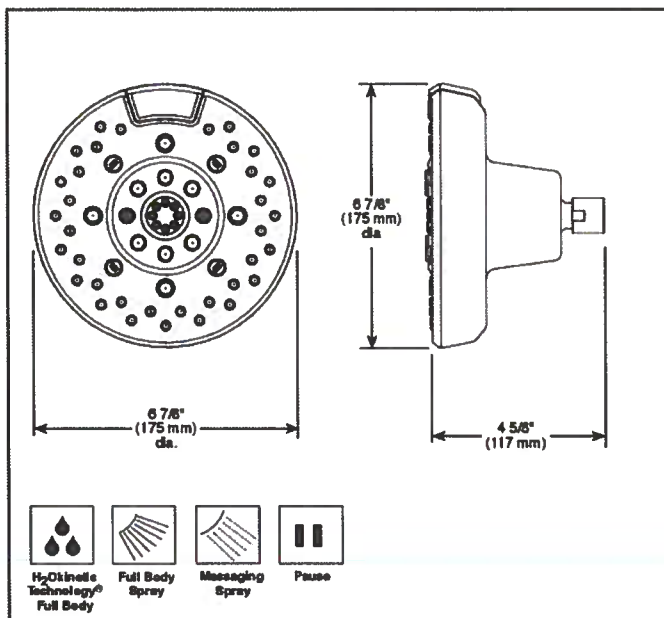

▲ Designate finish suffix

BRIZO® MULTI-FUNCTION SHOWERHEAD

- Levoir™ Bath Collection
- 4-Function Showerhead Featuring H₂Okinetic Technology®

FEATURES:

- Touch-Clean® Nozzles
- H₂Okinetic® Technology

STANDARD SPECIFICATIONS:

- Solid brass housing
- Showerhead has 1/2"-14 NPSM female connection
- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Wrench flats for tightening
- Showerhead ball nut pivots, rotates and provides extra thread coverage
- Push button for spray selection integrated into spray face
- Finished spray face
- Available collection matching shower arm RP92044▲

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BGP-B-87498 Rev. A


Brizo Kitchen & Bath Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, CN N5P 4L1
© 2017 Brizo Kitchen & Bath Company

Brizo 8" Widespread Bathroom Sink Faucet 65398LF-SLLHP/HX5398-SL

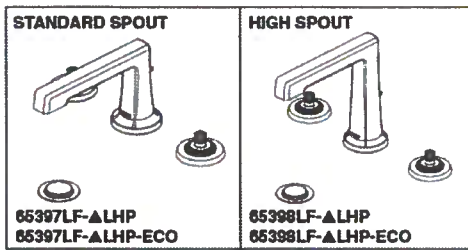

Submitted Model No.: _____

Specific Features: _____

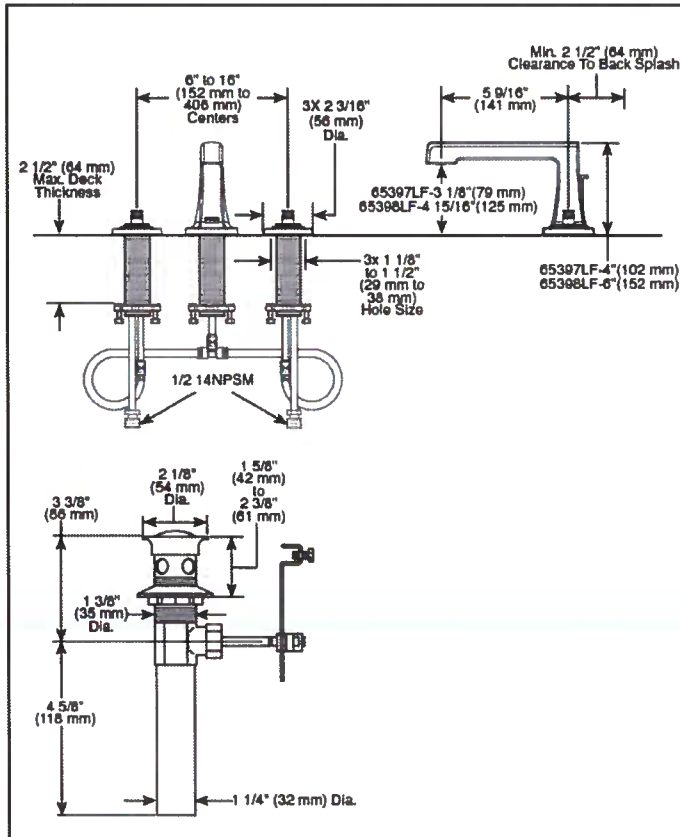

BRIZO[®] LAVATORY FAUCETS

- Levoir™ Collection
- Two Handle Widespread Deck Mount

FEATURES:

- Handles attach to end valves by use of magnets. No set screw required

STANDARD SPECIFICATIONS:

- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Maximum (ECO models only) 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three hole mount
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation
- 1/2-14 NPSM threaded inlets
- Metal drain with pop-up type fitting features plated flange and stopper
- Solid brass fabricated end valve and spout bodies
- Spout features laminar water flow
- Handles sold separately


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations

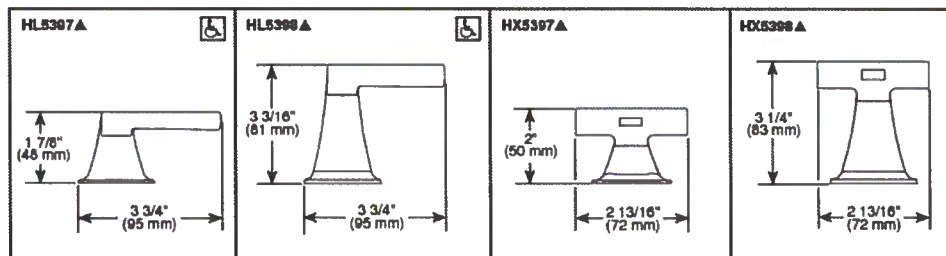


▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.
BSP-L-65397LF-LHP Rev. A

Brizo Kitchen & Bath Company
55 E 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, CN NSF 4LI
© 2018 Brizo Kitchen & Bath Company

Jr. Master



Brizo Robe Hook 693597-SL



693597A

Submitted Model No.: _____

Specific Features: _____

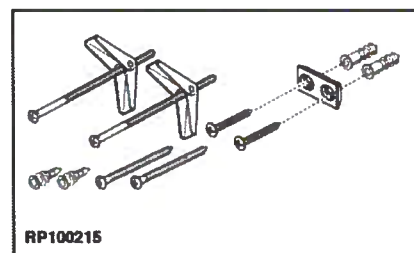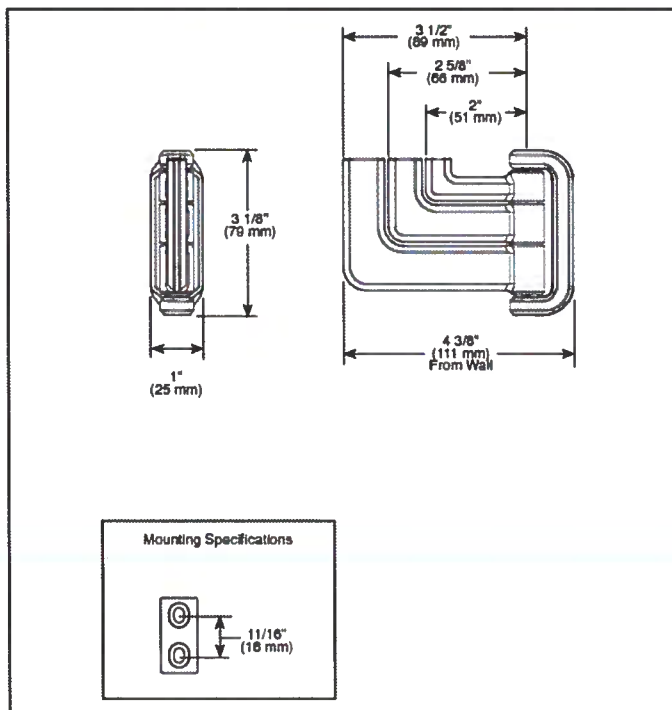

RP100215



RP100219

▲ Designate proper finish suffix

BRIZO

ACCESSORIES

- Levor™ Bath Collection
- Hinged Robe Hook

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, try finding a wood stud to anchor this accessory.
- Mounting hardware and mounting instructions included with product.
- Note: Plastic anchors, screw, toggle bolts, and mounting brackets are included with the mounting hardware.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.


Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-693597 Rev. A

Brizo Kitchen & Bath Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgewood Road, St. Thomas, CN 1NSP 4,1
© 2018 Brizo Kitchen & Bath Company

Jr. Master



Brizo Paper Holder 695098-SL



695098▲

Submitted Model No.: _____

Specific Features: _____

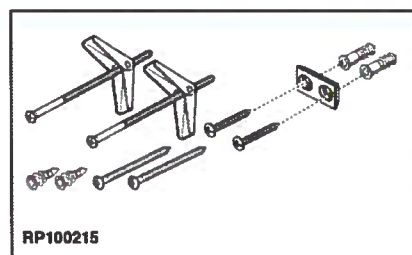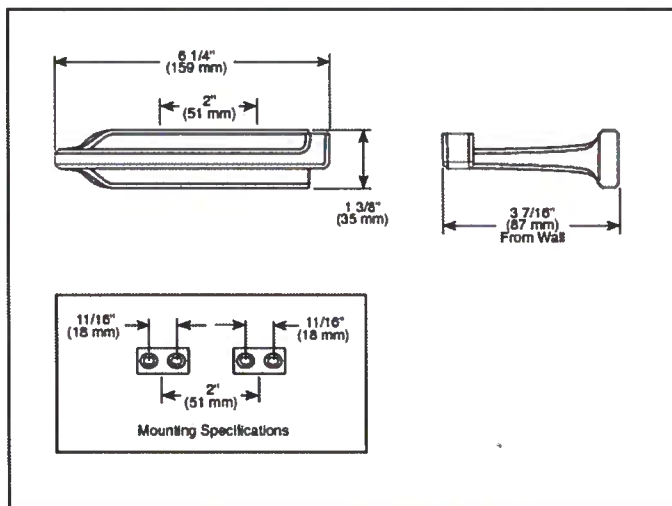

RP100215

▲ Designate proper finish suffix



RP92010

BRIZO

ACCESSORIES

- Levior™ Collection
- Tissue Holder

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, try finding a wood stud to anchor this accessory.
- Mounting hardware and mounting instructions included with product.
- Note: Plastic anchors, screw, toggle bolts, and mounting brackets are included with the mounting hardware.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-695098 Rev. A

Brizo Kitchen & Bath Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2018 Brizo Kitchen & Bath Company

Jr. Master

Kohler Undermount Bathroom Sink K-2215-0

KOHLER

Ladena®
Bathroom Sink
K-2215

Features

- Vitreous china.
- Under-mount
- With overflow.
- Includes 1193643 clamp assembly.
- 23-1/4" (591 mm) x 16-1/4" (413 mm)

Recommended Accessories

K-8998 P-Trap

Components

Additional included component/s: Basin Clamp Assembly.



ADA

Codes/Standards

ASME A112.19.2/CSA B45.1

ADA











ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

7-9-2016 01:41




THE BOLD LOOK
OF **KOHLER**

Jr. Master

Kohler Undermount Bathroom Sink K-2215-0 (continued)

KOHLER®

Ladena®
Bathroom Sink
K-2215

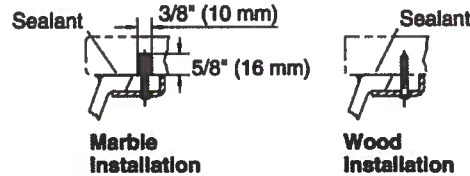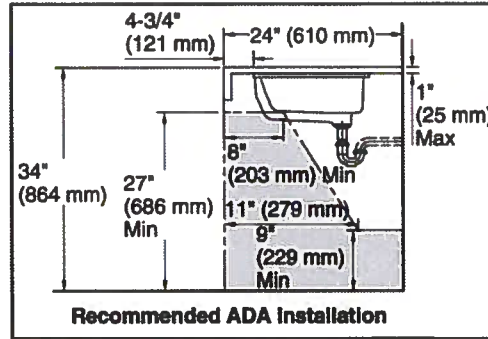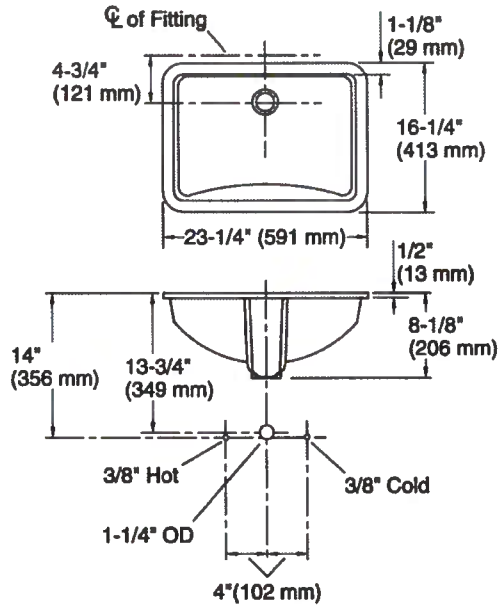

Technical Information

All product dimensions are nominal.

Installation:	Under-mount
Bowl area	Length: 20-7/16" (519 mm) Width: 13-1/2" (343 mm) Water depth: 4-5/8" (117 mm)
Drain hole:	1-3/4" (44 mm)
Template:	1002977-7, required, not included

Notes

Install this product according to the installation instructions.

The product diagram is based on the K-8998 adjustable P-trap with 1" (25 mm) of tailpiece exposed.

NOTICE: Countertop manufacturer or cutter must use the current product template available at www.kohler.com, or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cutout template is used.

ADA compliant when installed to the specific requirements of these regulations.

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

7-9-2016 01:41

THE BOLD LOOK
OF **KOHLER®**

Jr. Master

Kohler Toilet Seat K-4008-0


KOHLER®

GRIP-TIGHT REVEAL™ Q3™

Features

- Solid polypropylene plastic
- Closed-front
- Contoured seat for user comfort
- Quiet-Close™ lid and ring prevents slamming
- Quick-Release™ hinge caps snap open and seat pulls forward for removal
- Quick-Attach™ stainless steel fastener allows for top-mount screwdriver only installation
- Elegant lid design for a clean and sleek aesthetic
- Grip-Tight bumpers hold seat firmly in place

TOILET SEAT
K-4008
ALSO K-4009

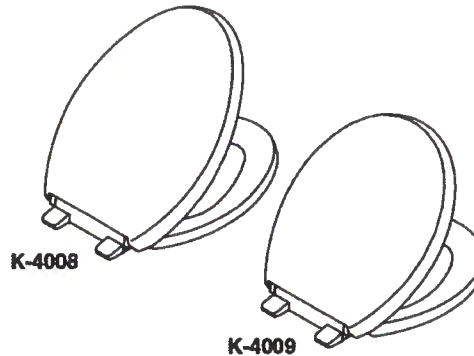

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.5

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-4008	Toilet seat – elongated closed-front	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4009	Toilet seat – round closed-front	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Product Specification

The toilet seat shall be made of solid polypropylene plastic. Product shall be available with closed-front and shall have Quiet-Close™ lid and ring that prevents slamming. Product shall have Quick-Release™ hinge caps that snap open to pull seat forward for removal. Product shall have Quick-Attach™ stainless steel fastener, which allows for top-mount screwdriver only installation. Product shall have elegant lid design for a clean and sleek aesthetic. Product shall have contoured seat for user comfort and grip-tight bumpers that hold seat firmly in place. The toilet seat shall be Kohler Model K-____-____.


Jr. Master

Kohler Toilet Seat K-4008-0 (continued)

GRIP-TIGHT REVEAL™ Q3™

Installation Notes

Install this product according to the installation guide.

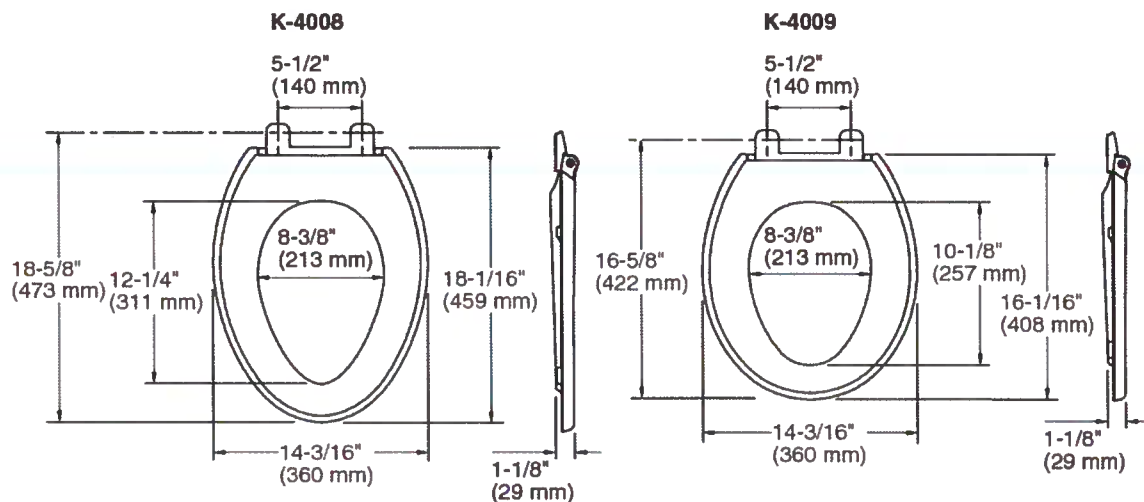

Product Diagram

GRIP-TIGHT REVEAL™ Q3™ TOILET SEAT
Page 2 of 2
1209726-4-A

THE BOLD LOOK
OF **KOHLER.**

Jr. Master

Kohler Two Piece Toilet K5709-0

KOHLER®

Corbelle®

ContinuousClean Two-Piece Toilet
K-5709

Features

- Vitreous China.
- Comfort Height® Elongated Bowl.
- Revolution 360™ swirl flushing system powered by AquaPiston®.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed skirted trapway.
- Patented ReadyLock™ installation system.
- 12" (305 mm) rough-in.
- CleanCoat® surface coating.
- 9-3/4" (248 mm) x 7-1/4" (184 mm) water area.
- 29 1/2" (749 mm) x 16-1/2" (419 mm) x 31-3/8" (797 mm).
- Floor mount / Floor outlet.
- ContinuousClean™ system

Recommended Accessories

K-4008 Reveal® Quiet-Close™ Elongated Toilet Seat
K-4108 C3®-230 Elongated Cleansing Toilet Seat
K-7637 Angle Supply with Stop (single)
K-5383 10" Rough-In Full Skirt Trap and Attachment System
K-5381 14" Rough-In Full Skirt Trap and Attachment System
K-20120-L Trip Lever
1023457 Wax Ring/Hardware Kit
1265114 Connector Hose

Components

Product includes:

K-4144 Elongated Toilet Bowl
K-5711 ContinuousClean Toilet Tank
Additional included component/s: Tank Cover, Trip Lever, and ReadyLock™ installation system.



ADA CSA B651 OBC

Codes/Standards

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	7	Black Black™

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

9-30-2018 07:14

THE BOLD LOOK
OF **KOHLER.**


Jr. Master

Kohler Two Piece Toilet K5709-0 (continued)

KOHLER®

Corbelle®

ContinuousClean Two-Piece Toilet
K-5709

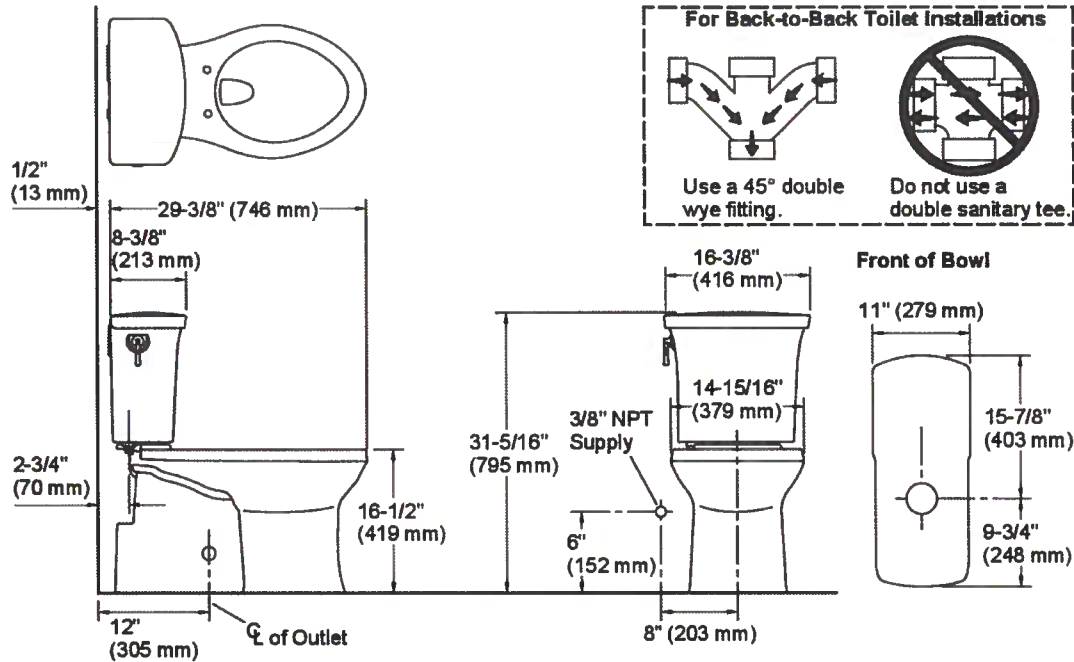

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount
Waste Outlet: Floor
Bowl shape: Elongated front
Flush type: Siphon jet
Rough-in: 12

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.


1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.


9-30-2018 07:14

THE BOLD LOOK
OF **KOHLER®**




Submitted Model No.: _____

Specific Features: _____

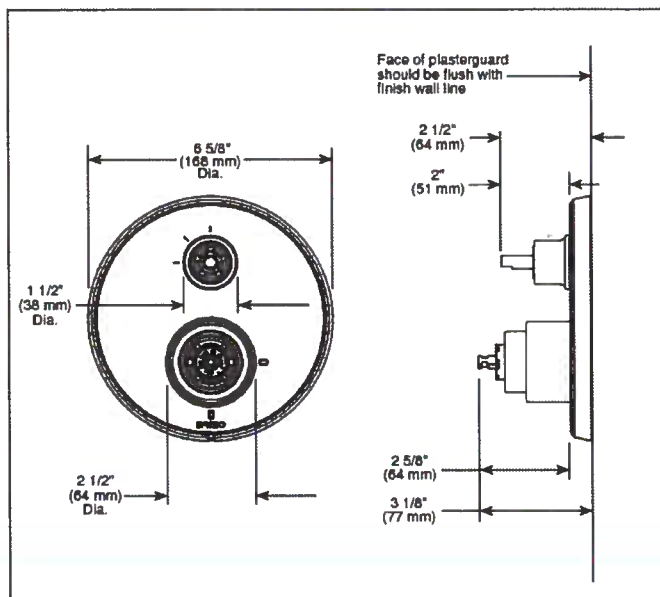


HL75P98▲ Lever Handle




▲ Designate Proper Finish Suffix

HX75P98▲ Cross Handle



RP100160▲ Available Thick Wall Installation Kit



BRIZO

INTEGRATED SHOWER DIVERTER TRIM

- Levor™ Bath Collection
- MultiChoice® Valve Trim with Three Function Diverter (T75P598-LHP)
- MultiChoice® Valve Trim with Six Function Diverter (T75P698-LHP)

FEATURES:

- Monitor® 14 series pressure balanced bath mixing valve

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- Back-to-back installation capability
- For use with MultiChoice® Universal Integrated Shower Diverter Rough (R75000 Series)
- Top handle controls diverter functions.
- Bottom handle controls on/off and temperature.
- Field adjustable to limit handle rotation into hot water zone.
- Bottom handle 120° maximum rotation.
- Red/Blue temperature indicator markings.
- Three function diverter (T75P598-▲LHP) has 2 individual positions and 1 shared position.
- For two individual functions, no shared functions, order additional RP72123.
- Six function diverter (T75P698-▲LHP) has 3 individual positions and 3 shared positions.
- For three individual functions, no shared functions, order additional RP72124.
- 1/2" rough-in.
- Cartridges included.
- Standard installation allows up to 1 1/8" finished wall thickness.
- Thick wall installation kit RP100160▲ can be ordered to allow for up to 2 1/8" finished wall thickness.
- Handles sold separately.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes, or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only

Maximum Flow Rate Guide

Rough	Cartridge	Outlet	40 psi	60 psi	80 psi
R75000	Pressure Balance	Shower	4.1 gpm	5.0 gpm	5.8 gpm
R75000-WS	Pressure Balance	Shower	3.9 gpm	4.8 gpm	5.6 gpm

Based on 6 Setting Diverter

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.


BSP-B-T75P598-LHP Rev. B

Brizo Kitchen & Bath Company
Indianapolis, Indiana 46260
A Division of Ingersoll Rand Corporation of Indiana
© 2018 Brizo Kitchen & Bath Company

Product Details and Dimensions

BRIZO


Brizo HX75P98-PC
"Levoir"
Faucet Handle

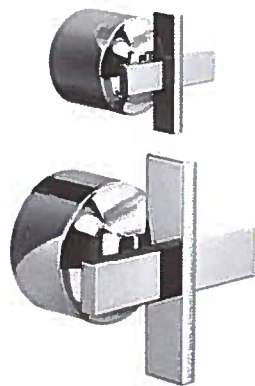

Details and Dimensions



Handle(s) Included	Yes
Number Of Handles	2 Handle
Handle Type	Cross

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

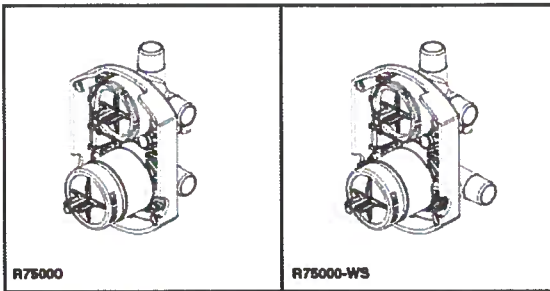

Submitted Model No.: _____

Specific Features: _____

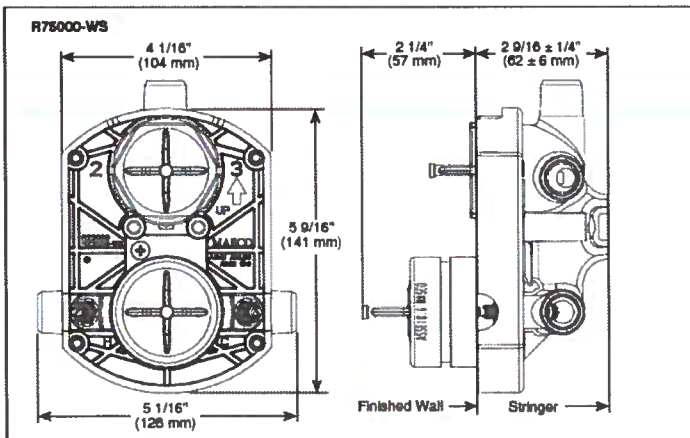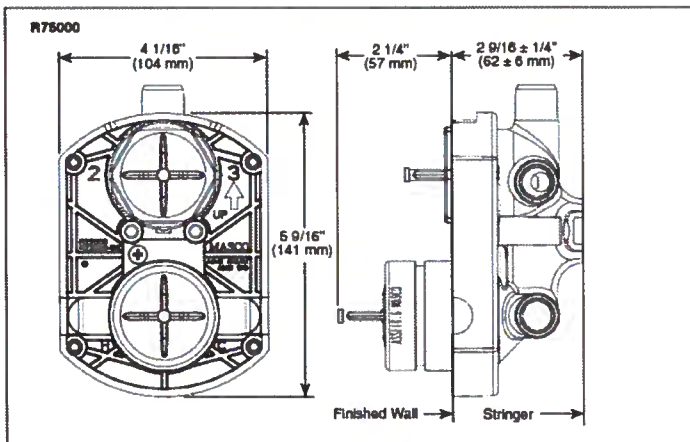

RP90545▲
Available Thick Wall Installation Kit



Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R75000 Rev. A

BRIZO

MULTICHoice® UNIVERSAL INTEGRATED SHOWER DIVERTER ROUGH

- R75000 (Shower Only)
- R75000-WS (Shower Only with Stops)

STANDARD SPECIFICATIONS:

- Forged brass body
 - Back-to-Back installation capabilities
 - Three port diverter.
 - Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap
 - Accepts Brizo (3) three or (6) six function diverter cartridges plus all MultiChoice® cartridges.
 - Plug provided for 3 setting diverter installation.
 - Cartridges ship with trim
 - Non-shared diverter cartridges also available (RP72123 and RP72124)
 - 1/2" outlets and connections
 - Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat
 - Sweat onto 1/2" C.W.T. or accepts 1/2" iron pipe, PEX or CPVC adapters
 - Standard installation accommodates finished wall thickness up to 1 1/8"
 - Thick wall installation kits can be ordered to allow for up to 2 1/8" finish wall thickness (order by valve type).
 - TempAssure® Thermostatic with Diverter Trim Extension Kit available (RP90545▲)
 - Not recommended for tub spout applications
- Note: No tub outlet
- Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting)

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.


COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Maximum Flow Rate Guide					
Rough	Cartridge	Outlet	40 psi	60 psi	80 psi
R75000	Thermostatic/Thermostatic	Shower	8.9 gpm	7.2 gpm	6.3 gpm
R75000-WS	Thermostatic/Thermostatic	Shower	5.3 gpm	6.5 gpm	7.4 gpm

Based on 6 Setting Diverter


Brizo Kitchen & Bath Company
Indianapolis, Indiana 46260
A Division of Masco Corporation of Indiana
© 2016 Brizo Kitchen & Bath Company

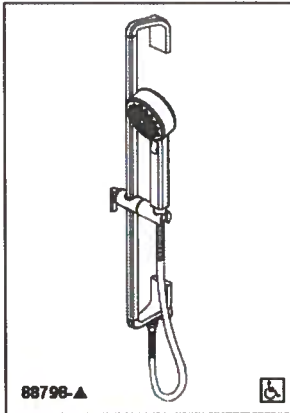

88798-▲

Submitted Model No.: _____

Specific Features: _____

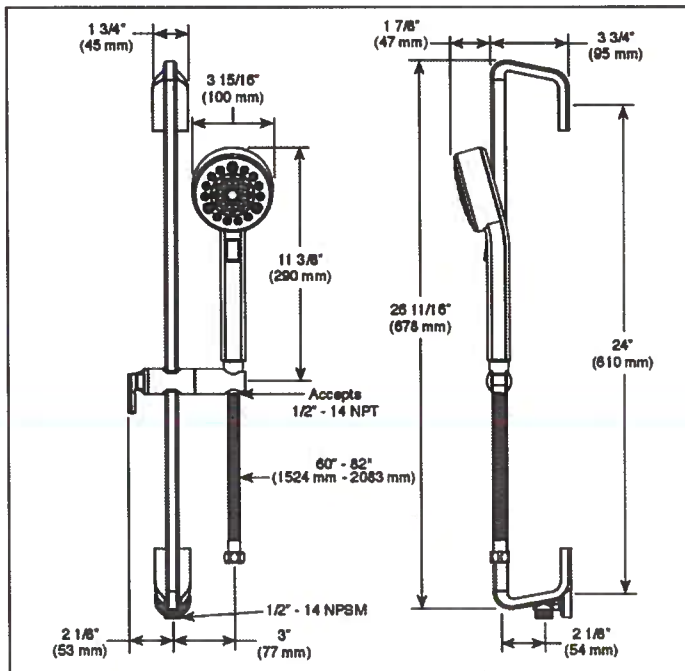

▲ Designate finish suffix

Spray Pattern



Full Body
Spray



H₂Okinetic
Technology®



Massaging
Spray



Pause

- ◆ Your Brizo Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-88798 Rev. A

BRIZO HAND SHOWER W/SLIDEBAR

■ Levoir™ Bath Collection

FEATURES:

- Multi function hand shower featuring H₂Okinetic Technology®

STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi, 6.6 l/min @ 550 kPa
- Wall bar with adjustable slide (allows for adjustable shower height). Not to be used as a grab bar.
- 60" - 82" (1524 mm - 2083 mm) stretchable finished metal hose
- Wall bar includes integrated elbow for hose connection
- Slide bar can be installed with hose connection on top if desired

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- ◆ Indicates compliance to
- ICC/ANSI A117.1 - Applies to handshower only
- EPA WaterSense®

Brizo Kitchen & Bath Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeway Road, St. Thomas, ON N5P 4L1
© 2018 Brizo Kitchen & Bath Company


Apt Bath

Brizo Shower Arm RP92044PC



Submitted Model No.: _____

Specific Features: _____

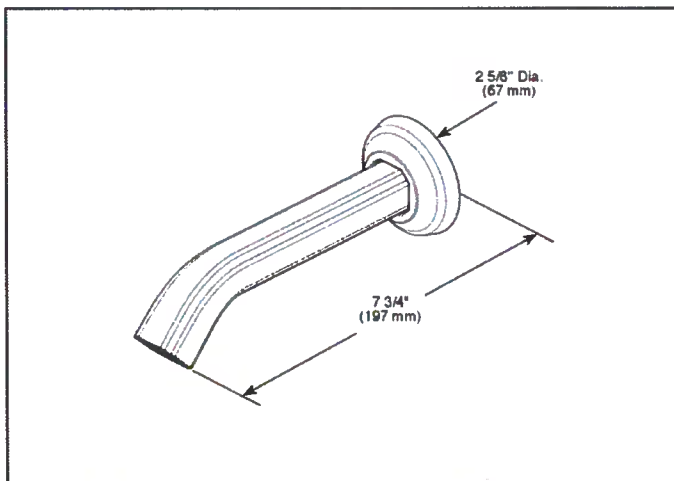

▲ Designate proper finish suffix

BRIZO®

SHOWER ARM AND FLANGE

■ Levoir™ Collection

STANDARD SPECIFICATIONS:

- Solid brass construction
- Intended for use with 87498 showerhead

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase
 - 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase
- No warranty is provided on batteries

COMPLIES WITH:

- ASIAE A112.18.1 / CSA B125.1

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.


BSP-B-RP92044 Rev. A

Brizo Kitchen & Bath Company


Indianapolis, Indiana 46290
A Division of Masco Corporation of Indiana
© 2017 Brizo Kitchen & Bath Company

Apt Bath

Brizo Shower Head 87498-PC



Submitted Model No.: _____
Specific Features: _____

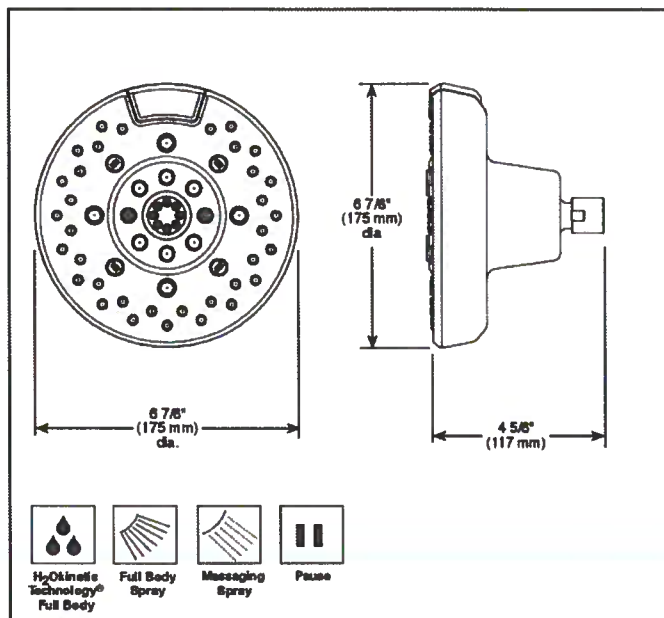

▲ Designate finish suffix

BRIZO[®] MULTI-FUNCTION SHOWERHEAD

- Levoir™ Bath Collection
- 4-Function Showerhead Featuring H₂Okinetic Technology[®]

FEATURES:

- Touch-Clean[®] Nozzles
- H₂Okinetic[®] Technology

STANDARD SPECIFICATIONS:

- Solid brass housing
- Showerhead has 1/2"-14 NPSM female connection
- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Wrench flats for tightening
- Showerhead ball nut pivots, rotates and provides extra thread coverage
- Push button for spray selection integrated into spray face
- Finished spray face
- Available collection matching shower arm RP92044▲

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- EPA WaterSense[®]

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-S-87498 Rev. A


Brizo Kitchen & Bath Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2017 Brizo Kitchen & Bath Company

Brizo 8" Widespread Bathroom Sink Faucet 65398LF-PCLHP/HX5398-PC

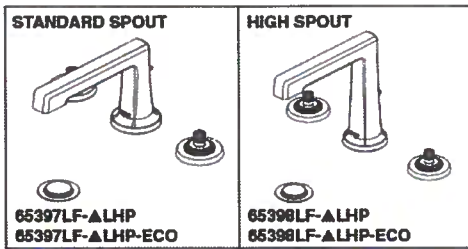

Submitted Model No.: _____

Specific Features: _____

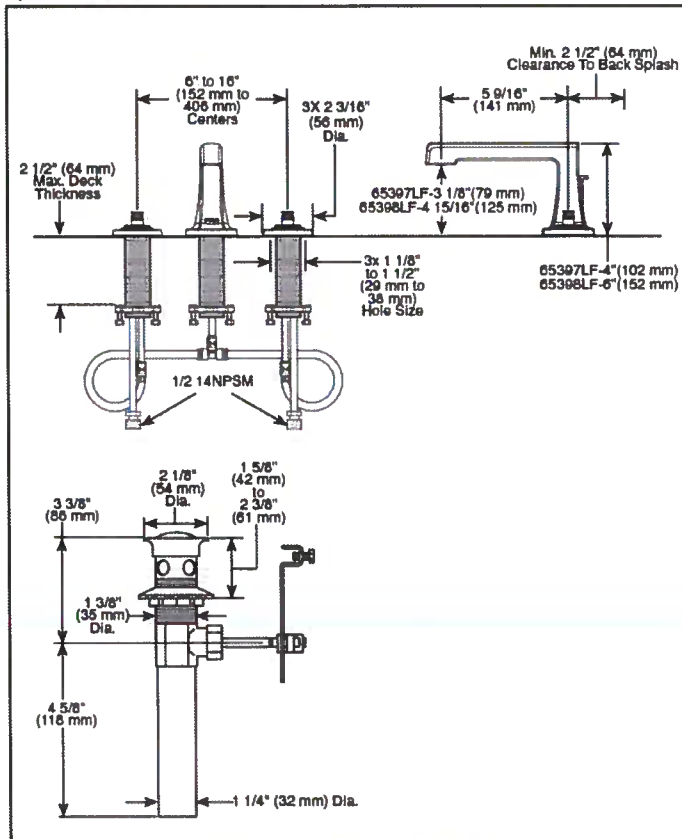

BRIZO[®] LAVATORY FAUCETS

- Levoir™ Collection
- Two Handle Widespread Deck Mount

FEATURES:

- Handles attach to end valves by use of magnets. No set screw required

STANDARD SPECIFICATIONS:

- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Maximum (ECO models only) 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three hole mount
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation
- 1/2-14 NPSM threaded inlets
- Metal drain with pop-up type fitting features plated flange and stopper
- Solid brass fabricated end valve and spout bodies
- Spout features laminar water flow
- Handles sold separately


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations

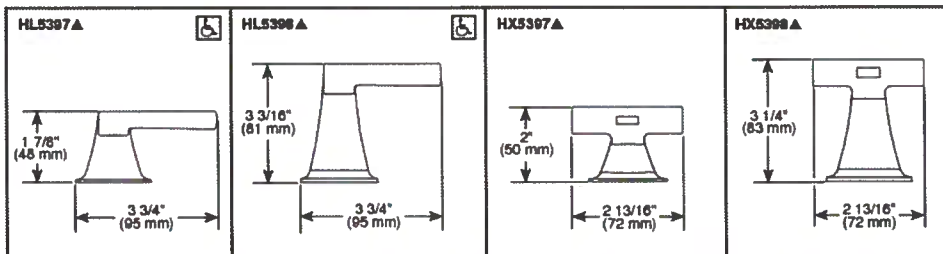

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.
BSP-L-65397LF-LHP Rev. A



Brizo Kitchen & Bath Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, CN NSP 4LI
© 2018 Brizo Kitchen & Bath Company




693597▲

Submitted Model No.: _____

Specific Features: _____

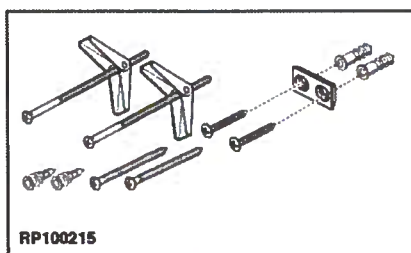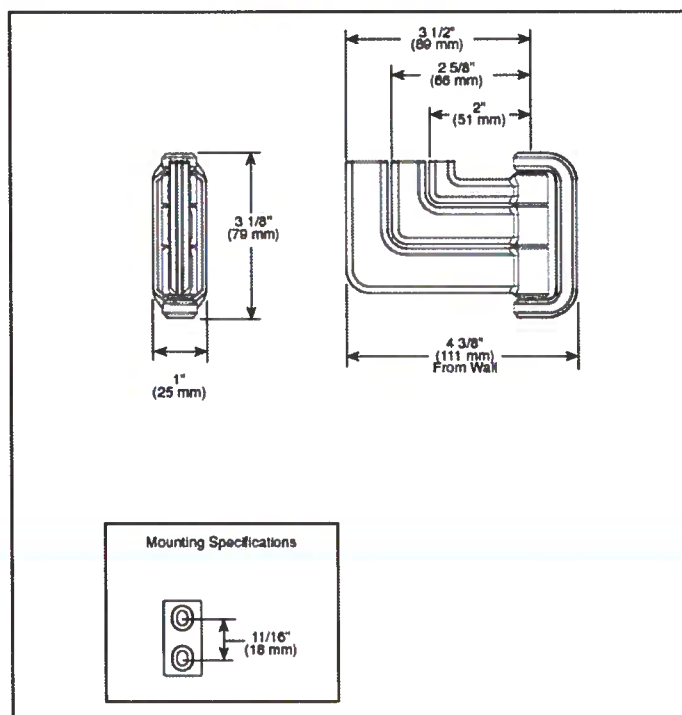

RP100215



RP100219

▲ Designate proper finish suffix

BRIZO ACCESSORIES

- Levoir™ Bath Collection
- Hinged Robe Hook

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, try finding a wood stud to anchor this accessory.
- Mounting hardware and mounting instructions included with product.
- Note: Plastic anchors, screw, toggle bolts, and mounting brackets are included with the mounting hardware.


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries): or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-693597 Rev. A



Brizo Kitchen & Bath Company
55 E 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2018 Brizo Kitchen & Bath Company



695098▲


Submitted Model No.: _____

Specific Features: _____

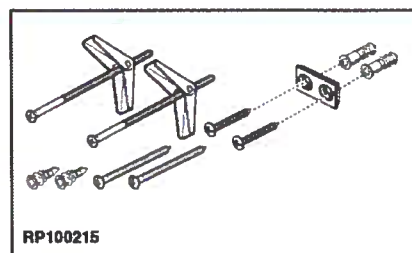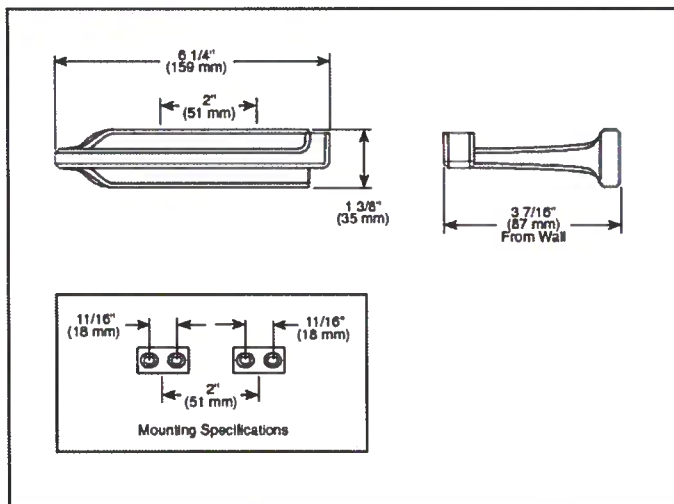

RP100215

▲ Designate proper finish suffix



RP92010

BRIZO

ACCESSORIES

- Levor™ Collection
- Tissue Holder

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, try finding a wood stud to anchor this accessory.
- Mounting hardware and mounting instructions included with product.
- Note: Plastic anchors, screw, toggle bolts, and mounting brackets are included with the mounting hardware.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-695098 Rev. A

Brizo Kitchen & Bath Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2018 Brizo Kitchen & Bath Company

Apt Bath

Kohler Undermount Bathroom Sink K-2215-0

KOHLER®

Ladena®
Bathroom Sink
K-2215

Features

- Vitreous china.
- Under-mount
- With overflow.
- Includes 1193643 clamp assembly.
- 23-1/4" (591 mm) x 16-1/4" (413 mm)

Recommended Accessories

K-8998 P-Trap

Components

Additional included component/s: Basin Clamp Assembly.



ADA

Codes/Standards

ASME A112.19.2/CSA B45.1

ADA











ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

7-9-2016 01:41




THE BOLD LOOK
OF **KOHLER**

Apt Bath

Kohler Undermount Bathroom Sink K-2215-0 (continued)

KOHLER®

Ladena®
Bathroom Sink
K-2215

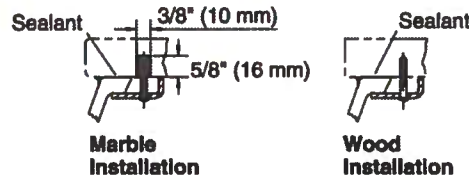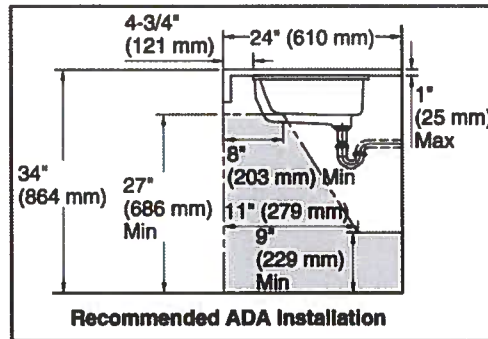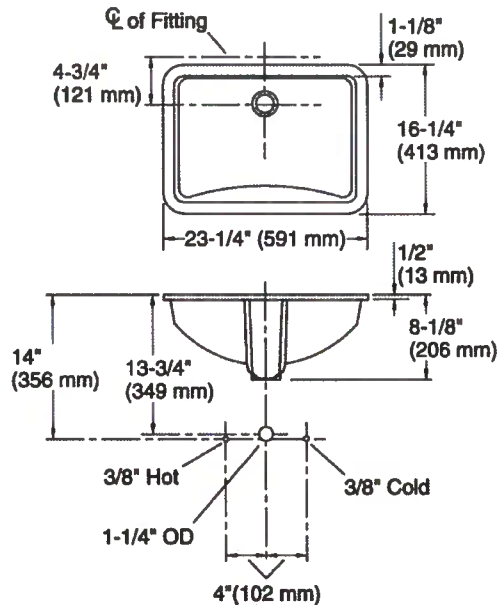

Technical Information

All product dimensions are nominal.

Installation:	Under-mount
Bowl area	Length: 20-7/16" (519 mm) Width: 13-1/2" (343 mm) Water depth: 4-5/8" (117 mm)
Drain hole:	1-3/4" (44 mm)
Template:	1002977-7, required, not included

Notes

Install this product according to the installation instructions.

The product diagram is based on the K-8998 adjustable P-trap with 1" (25 mm) of tailpiece exposed.

NOTICE: Countertop manufacturer or cutter must use the current product template available at www.kohler.com, or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cutout template is used.

ADA compliant when installed to the specific requirements of these regulations.

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

7-9-2016 01:41

THE BOLD LOOK
OF **KOHLER®**




GRIP-TIGHT REVEAL™ Q3™

Features

- Solid polypropylene plastic
- Closed-front
- Contoured seat for user comfort
- Quiet-Close™ lid and ring prevents slamming
- Quick-Release™ hinge caps snap open and seat pulls forward for removal
- Quick-Attach™ stainless steel fastener allows for top-mount screwdriver only installation
- Elegant lid design for a clean and sleek aesthetic
- Grip-Tight bumpers hold seat firmly in place

TOILET SEAT
K-4008
ALSO K-4009

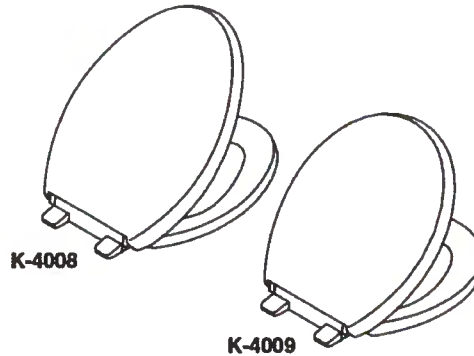

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.5

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-4008	Toilet seat – elongated closed-front	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4009	Toilet seat – round closed-front	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____


Product Specification

The toilet seat shall be made of solid polypropylene plastic. Product shall be available with closed-front and shall have Quiet-Close™ lid and ring that prevents slamming. Product shall have Quick-Release™ hinge caps that snap open to pull seat forward for removal. Product shall have Quick-Attach™ stainless steel fastener, which allows for top-mount screwdriver only installation. Product shall have elegant lid design for a clean and sleek aesthetic. Product shall have contoured seat for user comfort and grip-tight bumpers that hold seat firmly in place. The toilet seat shall be Kohler Model K-____-_____.

GRIP-TIGHT REVEAL™ Q3™

Installation Notes

Install this product according to the installation guide.

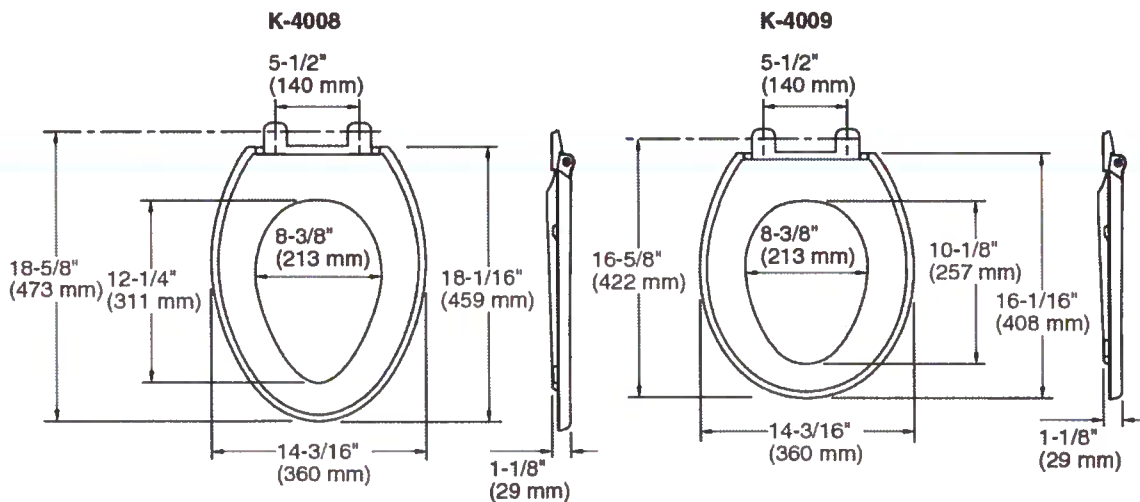

Product Diagram

GRIP-TIGHT REVEAL™ Q3™ TOILET SEAT
Page 2 of 2
1209726-4-A

THE BOLD LOOK
OF **KOHLER.**

Apt Bath

Kohler Two Piece Toilet K5709-0

KOHLER®

Corbelle®

ContinuousClean Two-Piece Toilet
K-5709

Features

- Vitreous China.
- Comfort Height® Elongated Bowl.
- Revolution 360™ swirl flushing system powered by AquaPiston®.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed skirted trapway.
- Patented ReadyLock™ installation system.
- 12" (305 mm) rough-in.
- CleanCoat® surface coating.
- 9-3/4" (248 mm) x 7-1/4" (184 mm) water area.
- 29 1/2" (749 mm) x 16-1/2" (419 mm) x 31-3/8" (797 mm).
- Floor mount / Floor outlet.
- ContinuousClean™ system

Recommended Accessories

K-4008 Reveal® Quiet-Close™ Elongated Toilet Seat
K-4108 C3®-230 Elongated Cleansing Toilet Seat
K-7637 Angle Supply with Stop (single)
K-5383 10" Rough-in Full Skirt Trap and Attachment System
K-5381 14" Rough-in Full Skirt Trap and Attachment System
K-20120-L Trip Lever
1023457 Wax Ring/Hardware Kit
1265114 Connector Hose

Components

Product includes:

K-4144 Elongated Toilet Bowl
K-5711 ContinuousClean Toilet Tank
Additional included component/s: Tank Cover, Trip Lever, and ReadyLock™ installation system.



ADA CSA B651 OBC

Codes/Standards

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	7	Black Black™

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.


9-30-2018 07:14

THE BOLD LOOK
OF KOHLER.

KOHLER®

Corbelle®

ContinuousClean Two-Piece Toilet
K-5709

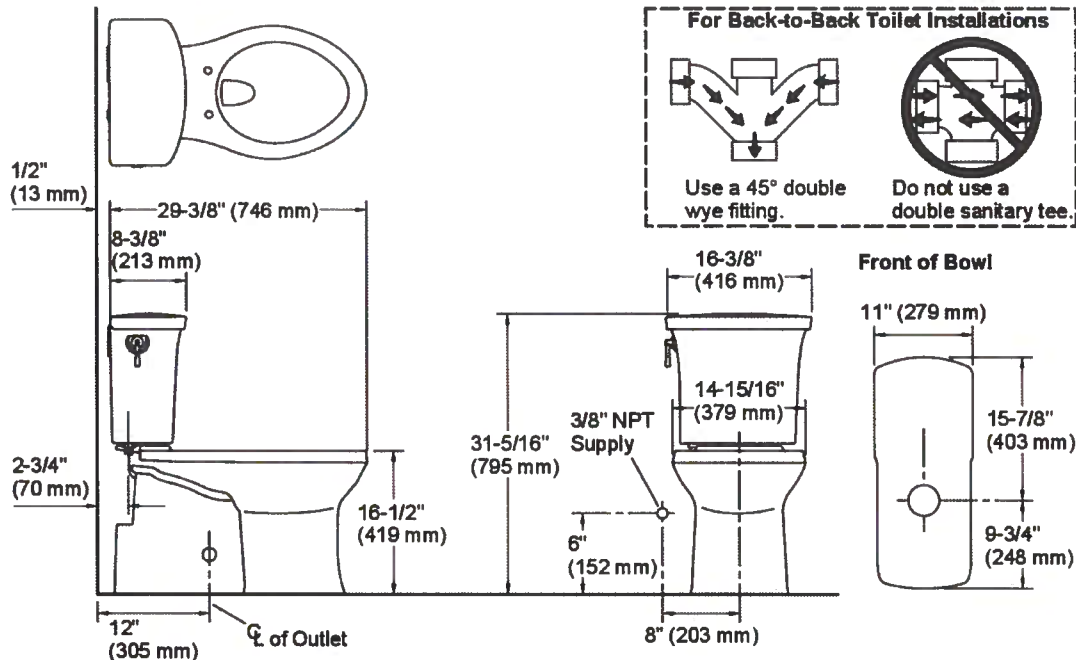

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount
Waste Outlet: Floor
Bowl shape: Elongated front
Flush type: Siphon jet
Rough-in: 12

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

9-30-2018 07:14

THE BOLD LOOK
OF
KOHLER®

BI-48SD/S



FEATURES

LED Lighting for brighter interior

Dual refrigeration keeps food fresher longer

Air purification system fights spoilage, odors

Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness

Microprocessor control assures peak performance

Water-filtration system reduces contaminants, chlorine taste and odor

Freshness cards for maximum food preservation

Rigorously tested in our U.S. manufacturing facilities to ensure decades of use

Exceptional 24/7 support from Madison, WI-based Customer Care team

Magnetic door seal system locks in cold air

Automatic ice maker with "max ice" feature

Adjustable shelves for maximum convenience

ACCESSORIES

48" Stainless Steel Kickplate

7007247

7007248

7007251

7007253

7008925

7008928

7010799

7013555

90° Door Stop

Air Purification Cartridge

Egg Container

Stainless Steel Pro Louvered Grille - 84"


Stainless Steel Side Panel

Water Filler 4204490

White Side Panel

Side panel mounting kit

Built-In Stainless Steel Pro Louvered Grilles

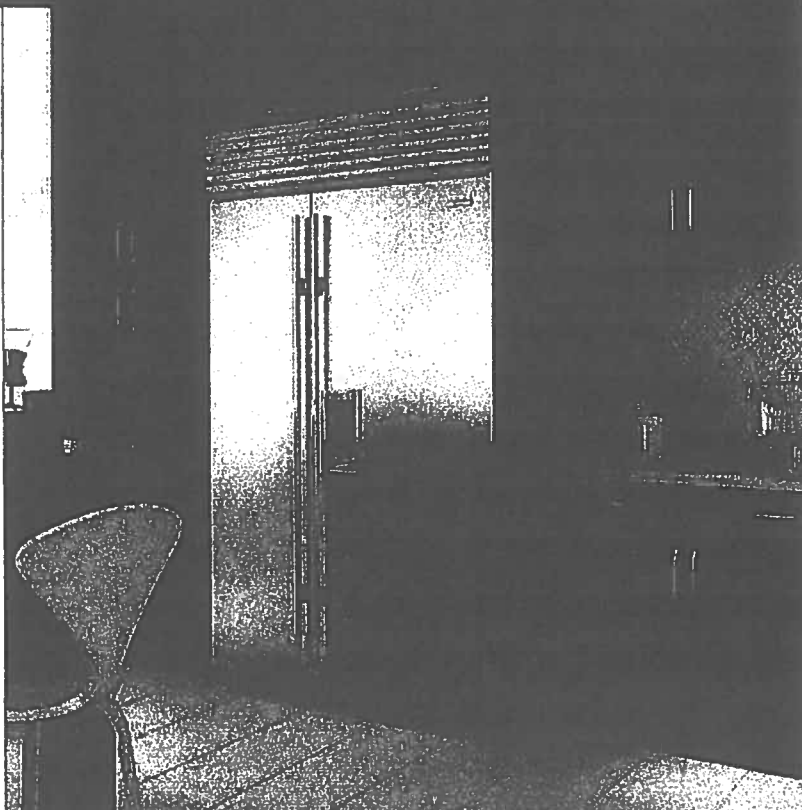Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

HANDLE OPTIONS

PRO



TUBULAR



PRODUCT DETAILS

REFRIGERATOR

- 4 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with divider
- 2 Storage drawers with divider
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment

FREEZER


- 3 Adjustable wire shelves
- 1 Stationary solid shelf
- 3 Storage drawers
- 5 Adjustable door shelves
- Automatic ice maker

* S.S. For
ALL
APPLIANCES!


PRODUCT SPECIFICATIONS

Model	BI-48SD/S
Dimensions	48"W x 84"H x 24"D
Door Clearance	30"
Weight	656 lbs
Refrigerator Capacity	18.8 cu. ft.
Freezer Capacity	9.6 cu. ft.
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type

ELECTRICAL




PLUMBING




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

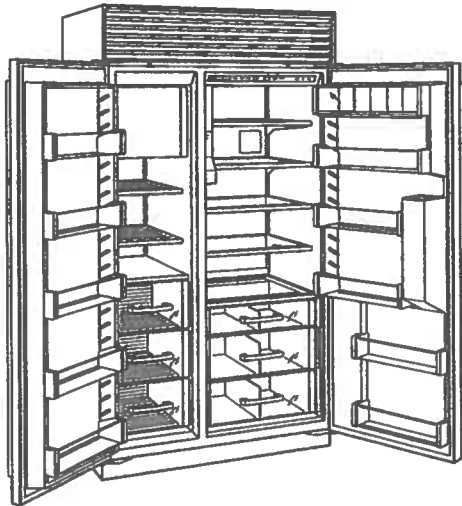


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

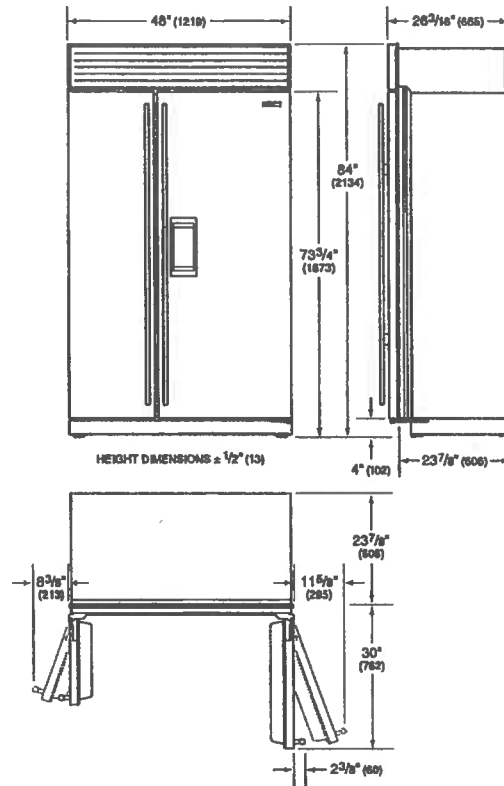

STANDARD INSTALLATION

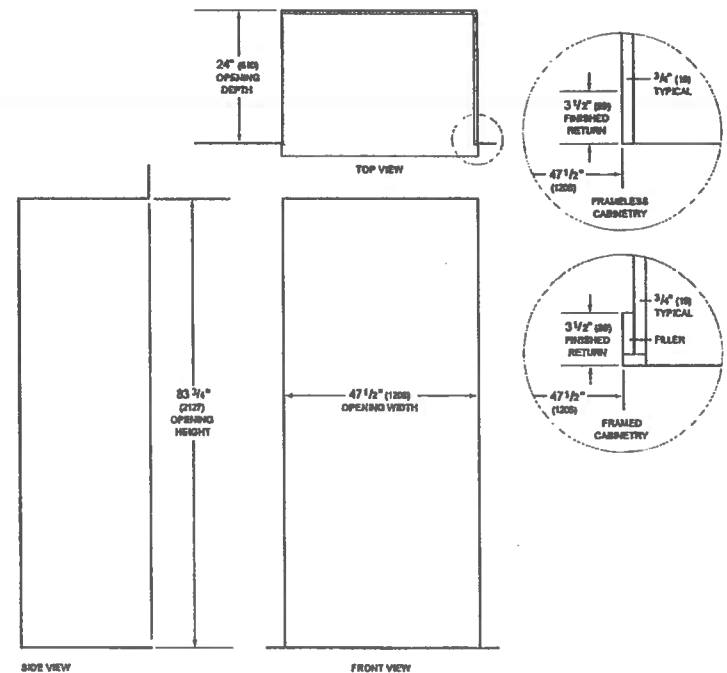

NOTE: 3 1/2 inch (89 mm) finished returns will be visible and should be finished to match cabinetry. Shaded line represents profile of unit.

Appliances

Asko Built-In Dishwasher DBI664PHXXLS

24" DISHWASHER—PRO HANDLE

ASKO
Inspired by Scandinavia

40 SERIES DBI664PHXXLS



FEATURES

Premium height-adjustable upper rack and premium lower rack
Top tray with Instant Lift™
Heavy-duty stainless steel construction
Nylon-coated steel racks
TouchProof™ stainless steel
Turbo Drying™ system
16 place-setting capacity
Quiet operation—42 dB(A)
9Spray™ wash system
Hidden controls
LED display
Delayed start



PROGRAMS

- Normal Wash
- Eco Wash
- Sanitation Wash
- Time Program
- Plastic Wash
- Hygiene Wash
- Crystal Glass
- Lower Half Wash
- Upper Half Wash
- Self-Cleaning
- Rinse and Hold

Appliances

Asko Built-In Dishwasher DBI664PHXXLS (continued)

24" DISHWASHER—PRO HANDLE




PRODUCT SPECIFICATIONS


Model	DBI664PHXXLS
Width	23 7/8"
Height	34" – 35 1/4"
Depth	22"
Door Clearance	24 5/8"
Weight	115 lb
Electrical Supply	115 VAC, 60 Hz
Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
Power Cord	4'
Water Connection	6" PEX tubing with 3/8" NPT female connection
Drain Connection	5" corrugated tubing
Pressure	4.2–140 psi

Electrical supply, plumbing supply, and drain should be located in an adjacent cabinet. If not, they must be located within the shaded area shown in the illustrations below.

ELECTRICAL | PLUMBING

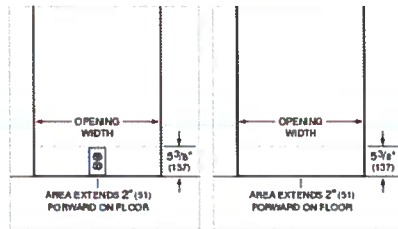


DIMENSIONS

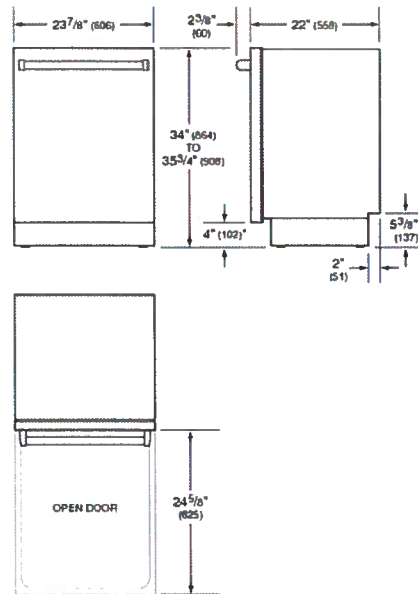

*Dimension will vary with product height.

J.S. Front.

INSTALLATION

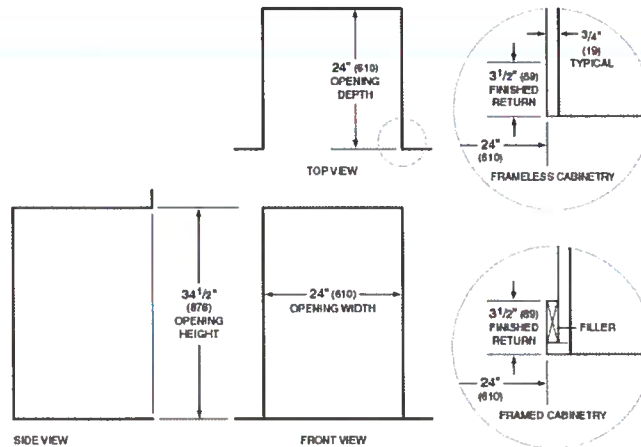

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry.

Appliances

Wolf Built-In Microwave MDD30PE/S/PH

30" E SERIES PROFESSIONAL DROP-DOWN DOOR MICROWAVE OVEN



MDD30PE/S/PH

FEATURES

- Integrates into any kitchen
- Matches E series ovens, coffee systems, convection steam oven
- 900 watts of power
- Quick-start controls for popular items
- Generous 1.6 cu. ft. capacity
- Gourmet mode cooks automatically from preset recipes
- *Keep Warm* mode
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison



Appliances

Wolf Built-In Microwave MDD30PE/S/PH (continued)


30" E SERIES PROFESSIONAL DROP-DOWN DOOR MICROWAVE OVEN



PRODUCT SPECIFICATIONS

Model	MDD30PE/S/PH
Dimensions	20 7/8"W x 17 7/8"H x 20"D
Capacity	1.6 cu. ft.
Door Clearance	14 3/16"
Weight	80 lbs
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Overall Capacity	1.6 cu. ft.
Power Cord Length	4 Feet
Receptacle	3-prong grounding-type


ELECTRICAL




NOTE:

Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

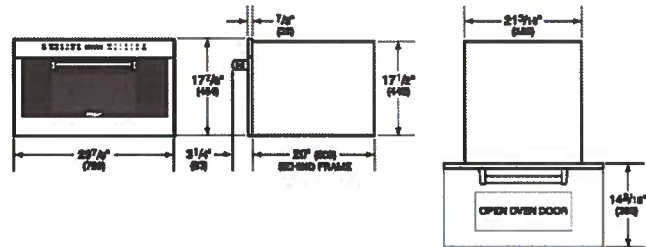

STANDARD INSTALLATION

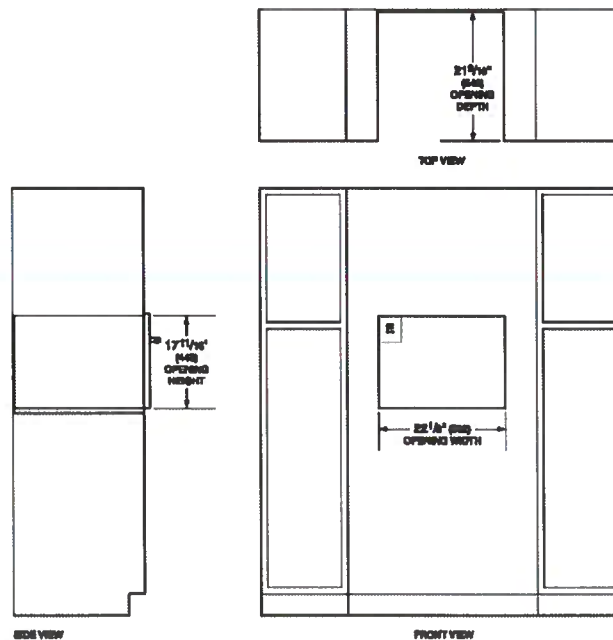

Appliances

Wolf Wall Mount Range Hood WPW542718


Pro 27" Deep Wall Hood



wolfappliance.com

FEATURES

- Heavy-duty, brushed stainless steel exterior with enclosed liner, available in multiple widths.
- Internal, in-line or remote blower required.
- Welded seams, hemmed edges and hand-finished craftsmanship.
- Recessed easy-access controls.
- Infinite-speed blower control.
- Heat sentry to automatically turn unit on when heat is sensed and adjust blower speed.
- Halogen lighting with two settings.
- Heat lamp receptacles (bulbs not included).
- Removable, dishwasher-safe stainless steel baffle filters.
- Transition with backdraft damper.
- Horizontal discharge with accessory kit.



Model PW482718

MODEL OPTIONS

30" Width	PW302718
36" Width	PW362718
42" Width	PW422718
48" Width	PW482718
54" Width	PW542718
60" Width	PW602718
66" Width	PW662718

ACCESSORIES

- Internal, in-line and remote blowers (refer to chart).
- 38" high stainless steel backsplash with or without warming racks.
- 6", 12", 18", 24" and 30" high stainless steel duct covers.
- Horizontal discharge kit.
- Make-up air damper.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

BLOWER OPTIONS	INTERNAL					IN-LINE		REMOTE			
CFM	300*	450*	600	900	1200	600	1100	600	900	1200	1500
PW302718	•	•	•	•		•		•		•	•
PW362718, PW422718	•	•	•	•			•		•	•	•
PW482718, PW542718	•	•		•	•		•		•	•	•
PW602718, PW662718	•	•			•		•			•	•

*For make-up air restricted applications.

Appliances

Wolf Wall Mount Range Hood WPW542718 (continued)

Pro 27" Deep Wall Hood



wolfappliance.com

SPECIFICATIONS

PRODUCT

Width 30", 36", 42", 48", 54", 60", 66"
Height 18"
Depth 27"
Weight 69–128 lb

DISCHARGE

Vertical 10" Round

ELECTRICAL

Supply 120 VAC, 60 Hz
Service 15 amp circuit

INSTALLATION


Bottom of Hood to Countertop 30–36"

Pro ventilation hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.


Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.

Dimensions may vary $\pm 1/8"$ (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

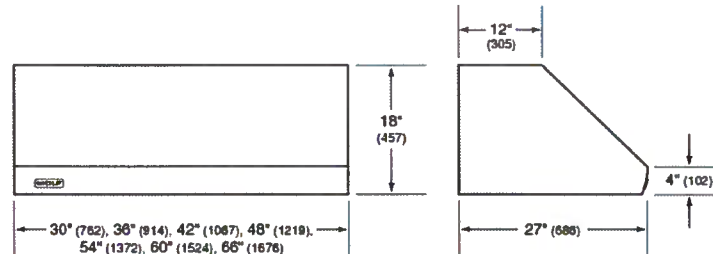

ELECTRICAL LOCATION

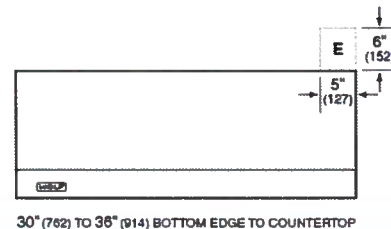


30" (762) TO 36" (914) BOTTOM EDGE TO COUNTERTOP

Product Details and Dimensions



Wolf 814423 Blower

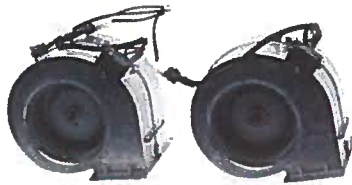

Details and Dimensions

CFM	1200 CFM
CEC Approved	Yes
Features	◆ Internal Blower
Fits These Models	PW602418
	PL462212
	PI663418
	PW662718
	PW542418
	PW482718
	PWC482418
	PW542718
	PL522212
	PW602718
	PWC542418
	PL582212
	PI423418
	PI543418
	PI363418
	PW482418

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

Appliances

Wolf Dual Fuel Range DF486G

48" DUAL FUEL RANGE - 6 BURNERS AND INFRARED GRIDDLE



DF486G



FEATURES

- 6 dual-stacked burners plus 15,000 Btu infrared griddle
- Dual-stacked burners produce up to 20,000 Btu
- Burners capable of delivering less than 300 Btu for premier simmer performance
- 10 cooking modes make meals easy
- Dual convection oven for faster, more consistent cooking
- Second 18" single convection oven
- Temperature probe lets you know when it's done
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Continuous cast iron grates for easy movement of pots and pans
- Cobalt blue porcelain interior
- Spark ignition system re-ignites if flame goes out
- Heavy-gauge stainless steel
- Exclusive pivoting control panel
- Red, black or stainless steel control knobs
- Self clean, delayed start, timed cook, Sabbath mode and more

ACCESSORIES

- 11" Cutting Board
- 30" Bake Stone Kit
- 30" Full-Extension Oven Rack
- Broiler Pan
- Dehydration Kit
- Oven Rack Set (3)
- Premier Baking Sheet
- Temperature Probe
- 5" and 10" stainless steel risers, and 20" riser with shelf
- Signature red, black or stainless steel control knobs
- Front Leg Extension Covers
- Cast iron S-grates and wok grata
- Hardwood cutting board
- High altitude conversion kit
- Stainless steel, brass or chrome bezels


Accessories available through an authorized Sub-Zero dealer
For local dealer information, visit subzero-wolf.com/dealer



KNOB OPTIONS



TOP CONFIGURATION

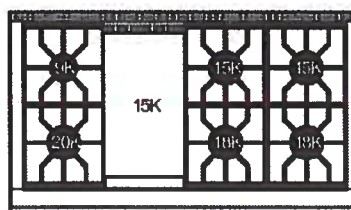

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 2 - 15,000 Btu Burners
- 2 - 18,000 Btu Burners
- 1 - 20,000 Btu Burner
- 1 - 15,000 Btu (14,900 Btu LP) Griddle

Appliances

Wolf Dual Fuel Range DF486G (continued)


48" DUAL FUEL RANGE • 6 BURNERS AND INFRARED GRIDDLE




PRODUCT SPECIFICATIONS

Model	DF486G
Dimensions	47 7/8"W x 30 7/8"H x 29 1/2"D
Oven 1 Usable Capacity	1.5 cu. ft.
Oven 1 Overall Capacity	2.5 cu. ft.
Oven 2 Usable Capacity	2.8 cu. ft.
Oven 2 Overall Capacity	4.5 cu. ft.
Door Clearance	19 1/2"
Weight	750 lbs
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female


DIMENSIONS

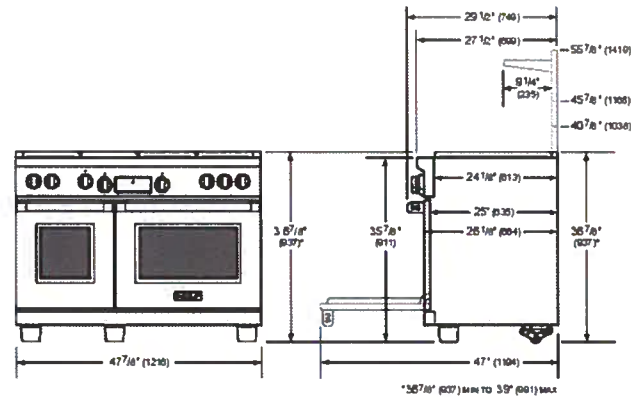

ELECTRICAL




GAS



NOTE:

Dimensions in parenthesis are in millimeters unless otherwise specified

STANDARD INSTALLATION

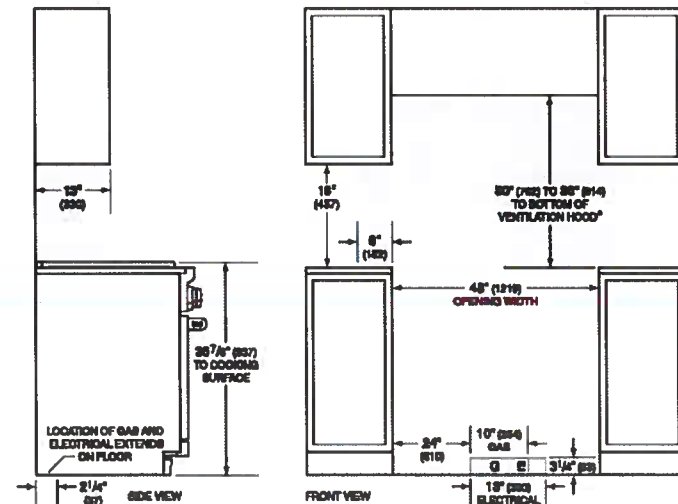

*Without ventilation hood, 24" (610) minimum clearance countertop to combustible materials, 48" (1219) for electrical.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials must be located within this area.

For island installation, 18" (457) minimum clearance back of range to combustible rear wall above countertop.

Appliances

Maytag Electric Dryer MED8630HC

Product Details and Dimensions

MAYTAG®

Maytag MED8630HC Electric Dryer



Details and Dimensions

Total Capacity	7.3cu ft
Moisture Sensor	Advanced Extra
Number of Cycles	14
Overall Depth	30-3/4"
Overall Height	38-3/4"
Overall Width	27"
Fuel Type	Electric
Control Features	Quick Dry
Eco-Friendly	Energy Star
Additional Information	◆ Smart Appliance
Included Features	◆ Steam-Enhanced ◆ Extra Power Button

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

Appliances

Prime Appliance Cords Power Cord RD100406L

Product Details and Dimensions

Prime Appliance Cords

Prime Appliance Cords RD100406L "Dryer Cord" Power Cord



Details and Dimensions

Cord Length	6 ft.
Additional Information	◆ 6ft. 10/4 SRDT Black 30 Amp Dryer Cord
Features	◆ Strain Relief Kit ◆ 4-Wire Cord fit most homes built after 1996 ◆ Ring Terminal for Secure connections

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

Appliances

Maytag Front Load Washer MHW8630HC

Product Details and Dimensions

MAYTAG

Maytag MHW8630HC Front Load Washer



Details and Dimensions

Total Capacity	5.0cu ft
Number of Wash/Rinse Temperatures	5
Number of Cycles	14

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

Appliances

PROFLO Connector / Supply Line PF146814

PF146/PFX146

Steel & PVC Braided Reinforced Flexible Connectors



Product Features

- Operating temperature: 40-160°F
- Operating pressure: 20-125 PSI
- Burst pressure: 2000 PSI at 70°F
- Nuts: heavy duty nickel plated brass or plastic (acetal)
- Hose barbs: low lead brass (long length)
- Outer wire braid: 304 stainless steel wire
- Inner hose: Heavy duty reinforced PVC (600 PSI burst pressure at 70°F)
- Washers: Santoprene rubber
- Ferrules: low lead brass
- A variety of lengths from 9" to 84"
- Made in China

Installation Instructions

- For use with water in accessible locations only
- Hand tighten plus 1/4 turn. Do not over tighten nuts.
- All closet connectors (plastic nuts) - hand tighten only.
- Washing machine hoses PF146814, PF146815, PF146816-hand tighten only



PFX146205

- Check for leaks before leaving job site.
- Inspect regularly for general fitness and replace if damaged, corroded, or worn.
- Do not expose to corrosive chemicals.

Product Specifications

STAINLESS STEEL CONNECTORS		Product Certification		
Product #	Description	ULPC	UPC	Low Lead Compliant
PFX146202	1/4" X 1/4" C X 24" Ice Maker	✓	✓	✓
PFX146205	1/4" X 1/4" C X 60" Ice Maker	✓	✓	✓
PFX146207	1/4" X 1/4" C X 84" Ice Maker	✓	✓	✓
PFX146222	3/4" X 3/4" F X 18" Water Heater	✓	✓	✓
PFX146224	3/4" X 3/4" F X 24" Water Heater	✓	✓	✓
PFX146232	3/4" M X 3/4" F X 18" Water Heater	✓	✓	✓
PFX146302	1/2" X 1/2" F X 12" Sink	✓	✓	✓
PFX146303	1/2" X 1/2" F X 16" Sink	✓	✓	✓
PFX146304	1/2" X 1/2" F X 20" Sink	✓	✓	✓
PFX146306	1/2" X 1/2" F X 30" Sink	✓	✓	✓
PFX146322	3/8" C X 1/2" F X 12" Sink	✓	✓	✓
PFX146323	3/8" C X 1/2" F X 16" Sink	✓	✓	✓
PFX146324	3/8" C X 1/2" F X 20" Sink	✓	✓	✓
PFX146326	3/8" C X 1/2" F X 30" Sink	✓	✓	✓
PFX146330	3/8" C X 1/2" F X 48" Sink	✓	✓	✓
PFX146332	3/8" C X 1/2" F X 60" Sink	✓	✓	✓
PFX146334	3/8" C X 1/2" F X 72" Sink	✓	✓	✓
PFX146342	3/8" X 3/8" C X 12" Sink	✓	✓	✓
PFX146343	3/8" X 3/8" C X 16" Sink	✓	✓	✓
PFX146344	3/8" X 3/8" C X 20" Sink	✓	✓	✓
PFX146350	3/8" X 3/8" C X 48" Dish Washer*	✓	✓	✓
PFX146352	3/8" X 3/8" C X 60" Dish Washer*	✓	✓	✓
PFX146354	3/8" X 3/8" C X 72" Dish Washer*	✓	✓	✓
PFX146365	1/2" X 1/2" C X 84" Dish Washer*	✓	✓	✓
PFX146423	1/2" C X 1/2" F X 16" Sink	✓	✓	✓
PFX146424	1/2" C X 1/2" F X 20" Sink	✓	✓	✓

* With brass elbow

** Hand tighten ONLY

Warranty and Codes

This PROFLO product carries a 1-year limited warranty. ASME A112.18.6-2009. IAPMO listed.

STAINLESS STEEL CONNECTORS		Product Certification		
Product #	Description	ULPC	UPC	Low Lead Compliant
PFX146430	3/8" C X 3/8" OD CPLG X 12" Sink	✓	✓	✓
PFX146432	3/8" C X 3/8" OD CPLG X 20" Sink	✓	✓	✓
PFX146462	1/2" F X BC X 12" Closet**	✓	✓	✓
PFX146463	1/2" F X BC X 16" Closet**	✓	✓	✓
PFX146471	3/8" C X BC X 9" Closet**	✓	✓	✓
PFX146472	3/8" C X BC X 12" Closet**	✓	✓	✓
PFX146473	3/8" C X BC X 16" Closet**	✓	✓	✓
PFX146474	3/8" C X BC X 20" Closet**	✓	✓	✓
PFX146492	1/2" C X BC X 12" Closet**	✓	✓	✓
PF146814	48" Washing Machine Hose**	✓	✓	✓
PF146815	60" Washing Machine Hose**	✓	✓	✓
PF146816	72" Washing Machine Hose**	✓	✓	✓

PVC CONNECTORS		Product Certification		
Product #	Description	ULPC	UPC	Low Lead Compliant
PFX146002	1/2" X 1/2" F X 12" Sink	✓	✓	✓
PFX146022	3/8" C X 1/2" F X 12" Sink	✓	✓	✓
PFX146023	3/8" C X 1/2" F X 16" Sink	✓	✓	✓
PFX146024	3/8" C X 1/2" F X 20" Ice Maker	✓	✓	✓
PFX146172	3/8" C X BC X 12" Closet**	✓	✓	✓
PFX146198	1/4" X 1/4" C X 60" Ice Maker	✓	✓	✓

FERGUSON
Bath, Kitchen & Lighting Gallery



Showroom Selections

KIM TODD
OUT OF TOWN HOME PIC

Shaine D'Angelo
3901 W Reno Ave
Oklahoma City, OK 73107
(405) 409-3881
Shaine.dangelo@ferguson.com

Table of Contents

Table of Contents	2
Kitchen	3
Powder Bath	4
Laundry	5
Master Bath	6
Jr. Master	9
Apt Bath	11
Appliances	13

Kitchen



Pull-Out Spray Kitchen Faucet
4559441 Stainless Steel
\$2,010.64 ea



Water Dispenser
1917731 Stainless Steel
\$615.82 ea



Water Dispenser
1881184 White
\$468.22 ea



** Make 30" wide*

Apron Front / Specialty Kitchen Sink
4668934 Stainless Steel
\$504.30 ea



*ADD:
* NEED DISPOSAL*

Drain Strainer
30975 Polished Stainless
\$98.04 ea



Powder Bath



Wall Mount Bathroom Sink Faucet
7776163 Brilliance Luxe Gold
\$710.48 ea



Lavatory Drain
7212114 Brilliance Luxe Gold
\$78.02 ea

* Use
same
size as
in master
Bath.



Two Piece Toilet
7299836/7116326 White
\$386.95 ea




Toilet Seat
4490762 White
\$55.79 ea

Laundry



Laundry Sink
4896220 Stainless Steel
\$634.41 ea

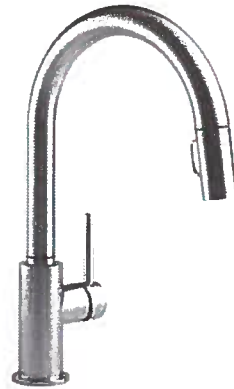


Pull-Out Spray Kitchen Faucet
4196642 Arctic Stainless
\$442.81 ea




Drain Strainer
1192756 Stainless Steel
\$23.38 ea

Master Bath




Freestanding Tub Filler

4702661/7212122/7211690 Brilliance Luxe Nickel
\$2,267.56 ea

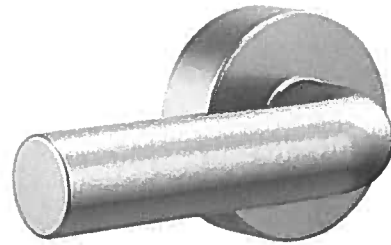

Toilet Tank Lever

7211976 Brilliance Luxe Nickel
\$102.92 ea

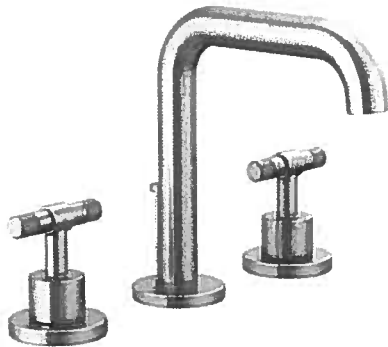

8" Widespread Bathroom Sink Faucet

7211679/7211514 Brilliance Luxe Nickel
Qty: 2 / \$707.16 ea



Undermount Bathroom Sink


29448 White

Qty: 2 / \$295.17 ea



Two Piece Toilet

7310182/7604703 White
\$443.88 ea



Toilet Seat


4490762 White
\$55.79 ea



Thermostatic / Volume Control Trim
7211751 Brilliance Luxe Nickel
\$521.24 ea



Tub & Shower Rough In Valve
7211702 Rough Brass
\$149.60 ea

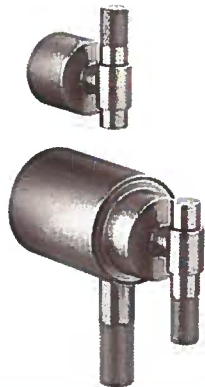


Faucet Handle
7211937 Brilliance Luxe Nickel
\$217.46 ea




Shower Head
7211770 Brilliance Luxe Nickel
\$263.94 ea



Slidebar Mount Hand Shower
7211867 Brilliance Luxe Nickel
\$673.96 ea

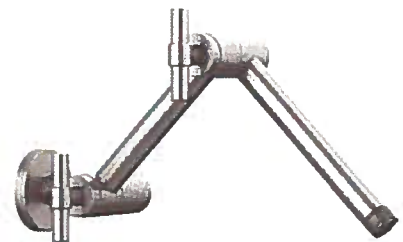


Shower Arm
7212073 Brilliance Luxe Nickel
\$195.88 ea

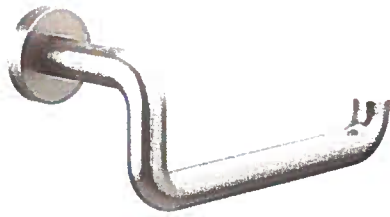


Paper Holder

7212001 Brilliance Luxe Nickel
\$151.06 ea

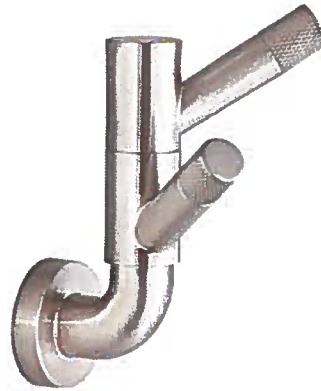

Robe Hook

7212016 Brilliance Luxe Nickel
Qty: 3 / \$137.78 ea

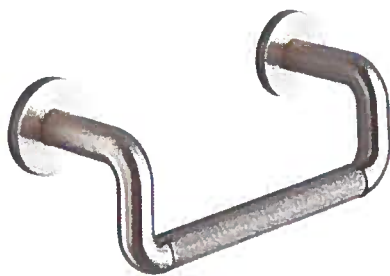

Towel Ring

7212234 Brilliance Luxe Nickel
\$151.06 ea



Towel Bar

7211671 Brilliance Luxe Nickel
\$202.52 ea




BAINULTRA EVANESCENCE 6634 TUN

BEVKRFOOTWH
\$7,775.00 ea


Jr. Master



Non-Thermostatic Valve Trim
7665054 Luxe Steel
\$351.92 ea

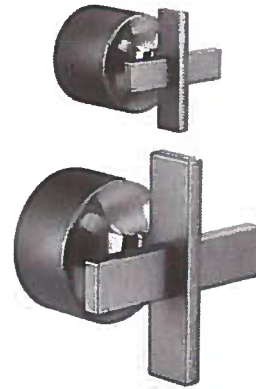

Faucet Handle
7717250 Luxe Steel
\$205.84 ea

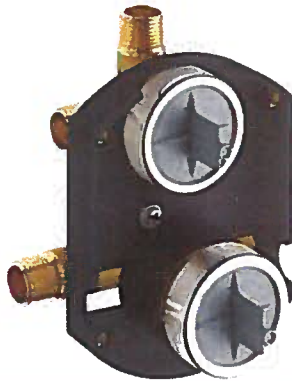

Tub & Shower Rough In Valve
7211702 Rough Brass
\$149.60 ea



Slidebar Mount Hand Shower
7664904 Luxe Steel
\$577.68 ea




Shower Arm
7660865 Luxe Steel
\$104.58 ea



Shower Head
7660826 Luxe Steel
\$361.88 ea



8" Widespread Bathroom Sink Faucet
 7660863/7660845 Luxe Steel
\$775.22 ea

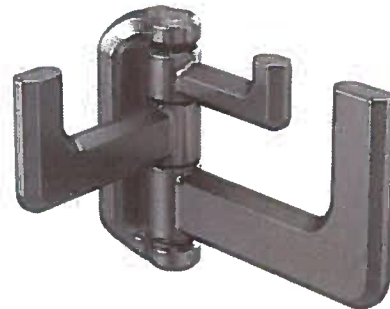

Robe Hook
 7664950 Luxe Steel
\$180.94 ea



Paper Holder
 7660854 Luxe Steel
\$149.40 ea



Undermount Bathroom Sink
 29448 White
\$295.17 ea



Toilet Seat
 4490762 White
\$55.79 ea



Two Piece Toilet
 7310182/7604703 White
\$443.88 ea


Apt Bath



Non-Thermostatic Valve Trim

7664999 Chrome

\$242.36 ea

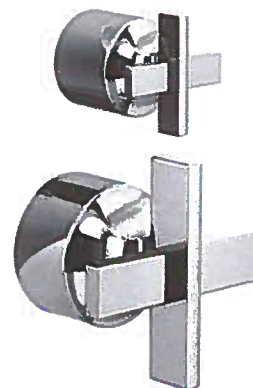

Faucet Handle

7716979 Polished Chrome

\$141.10 ea



Tub & Shower Rough In Valve

7211702 Rough Brass


\$149.60 ea



Slidebar Mount Hand Shower

7664923 Chrome

\$398.40 ea

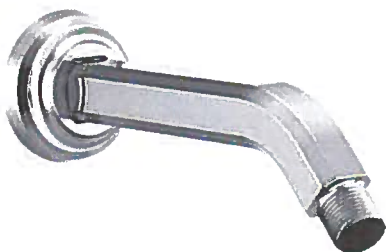

Shower Arm

7660825 Chrome

\$71.38 ea




Shower Head

7660872 Chrome

Qty: 2 / \$249.00 ea



8" Widespread Bathroom Sink Faucet
 7660846/7660807 Chrome
\$536.18 ea

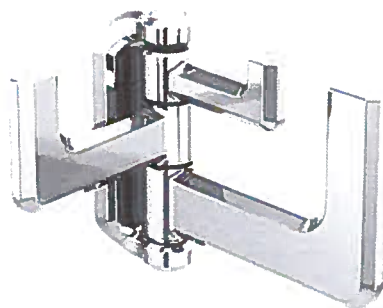

Robe Hook
 7665000 Chrome
\$124.50 ea



Paper Holder
 7660786 Chrome
\$102.92 ea



Undermount Bathroom Sink
 29448 White
\$295.17 ea



Toilet Seat
 4490762 White
\$55.79 ea



Two Piece Toilet
 7310182/7604703 White
\$443.88 ea

48" BUILT-IN SIDE-BY-SIDE REFRIGERATOR/FREEZER WITH DISPENSER

subzero

BI-48SD/S



FEATURES

LED Lighting for brighter interior

Dual refrigeration keeps food fresher longer

Air purification system fights spoilage, odors

Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness

Microprocessor control assures peak performance

Water-filtration system reduces contaminants, chlorine taste and odor

Freshness cards for maximum food preservation

Rigorously tested in our U.S. manufacturing facilities to ensure decades of use

Exceptional 24/7 support from Madison, WI-based Customer Care team

Magnetic door seal system locks in cold air

Automatic ice maker with "max ice" feature

Adjustable shelves for maximum convenience

ACCESSORIES

48" Stainless Steel Kickplate

7007247

7007248

7007251

7007253

7008925

7008928

7010799

7013555

90° Door Stop

Air Purification Cartridge

Egg Container

Stainless Steel Pro Louvered Grille - 84"

Stainless Steel Side Panel


Water Filter 4204490

White Side Panel

Side panel mounting kit

Built-In Stainless Steel Pro Louvered Grilles

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

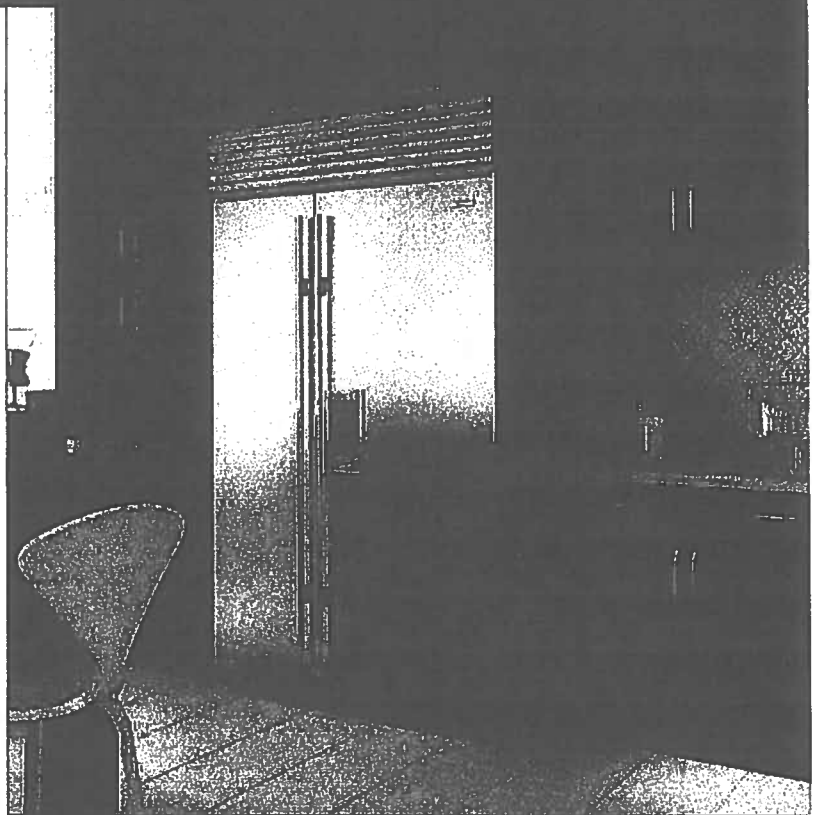

HANDLE OPTIONS

PRO



TUBULAR



PRODUCT DETAILS

REFRIGERATOR

- 4 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with divider
- 2 Storage drawers with divider
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment

FREEZER

- 3 Adjustable wire shelves
- 1 Stationary solid shelf
- 3 Storage drawers
- 5 Adjustable door shelves
- Automatic ice maker

* MIGHT WANT
VENT
AT
BOTTOM -
FULLY
INTEGRATED

Appliances



Upright Freezer
SBI36FSPHLH Pro Handle-Left Hinge
\$8,105.00 ea



Freezerless Refrigerator
SBI36RSPHRH Pro Handle-Right Hinge
\$7,775.00 ea



Built-In Dishwasher
ADBI664PHXXLS Stainless Steel
\$1,459.00 ea

FULLY
INTEGRATED?




Built-In Microwave
WMDD30PESPH Stainless Steel/Pro Handle
\$2,190.00 ea



ADD
STAINLESS
EXTENSION
TO CLG.

Wall Mount Range Hood
WPW542718 Stainless Steel
\$2,669.00 ea

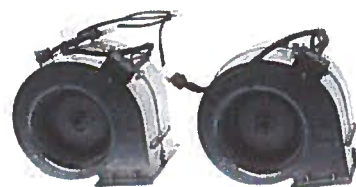

Blower
W814423 N/A
\$831.00 ea



Dual Fuel Range
WDF486G Stainless Steel
\$13,770.00 ea



Electric Dryer
MMED8630HC Metallic Slate
\$1,029.00 ea



Power Cord
PRD100406L Black
\$17.81 ea



Front Load Washer
MMHW8630HC Chrome
\$1,049.00 ea



Connector / Supply Line
2405282 N/A
\$15.26 ea